


Female Header
Single Row Dual Row
Bottom Entry

Pitch: 2.00 x Series
224
226

woxconn

[Http://www.woxconn.com](http://www.woxconn.com)




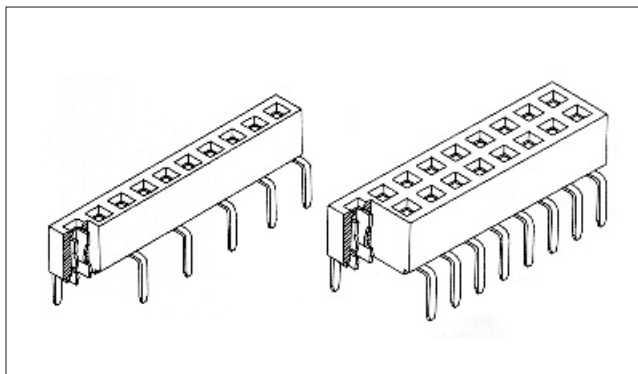


SPECIFICATIONS:

Current Rating: 2.0 AMP
Contact Resistance: 30m $\bullet$ Max
Insulation Resistance: 1000M $\bullet$ Min
Withstand Voltage: 500VAC/minute
Operation Temperature: -40°C to +105°C

MATERIALS:

Contact Material: Copper Alloy
Contact Plating: Gold or Tin over 50 μ Ni
Insulator: Glass Filled Polyester(UL94V-0)
Standard: NYLON-6T

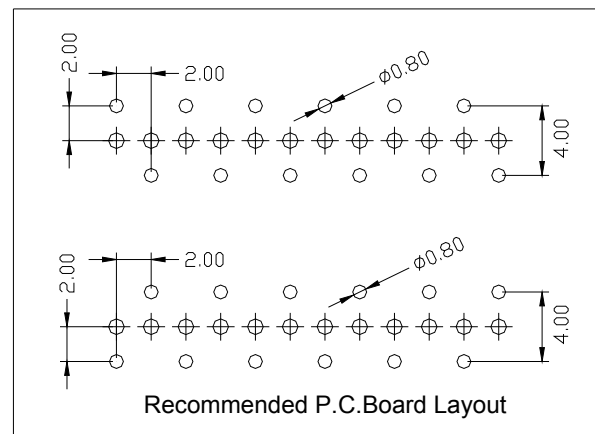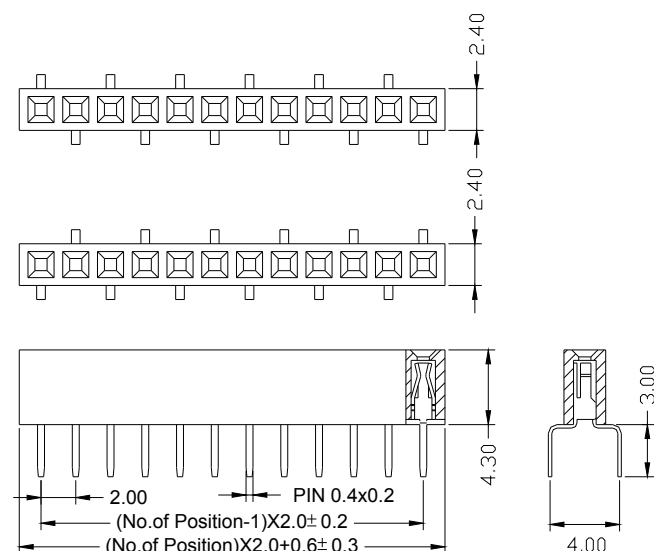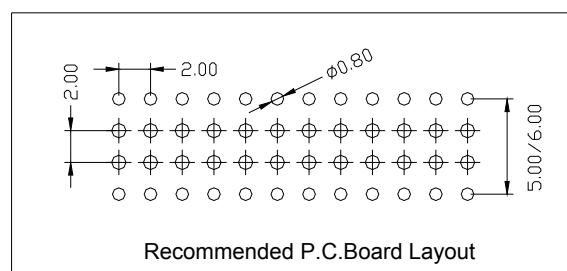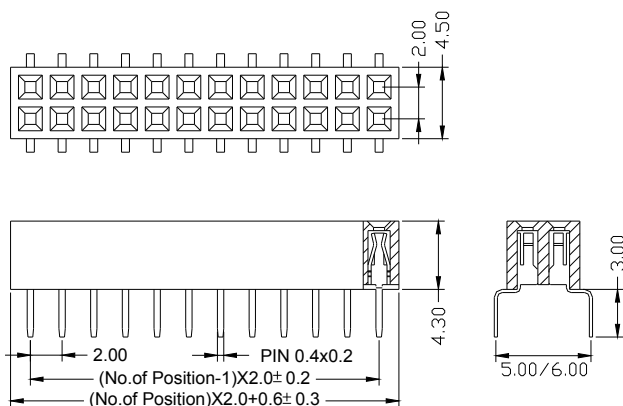

Ordering Code

① ② ③ ④ ⑤ ⑥ ⑦ ⑧ ⑨ ⑩
2 2 X X XX B X X 1 0

- ① Series No.:
2= Female Header
- ③ Insulator Height:
4 = 4.3mm
6 = 4.6mm
- ② Pitch:= 2.00mm

- ④ Dip Spacing:
1=Single row
2=Double row

- ⑤ Number of Contacts:
Single row 01 to 40
Double row 02 to 80

- ⑥ Tail & Mounting Style:
B=Bottom Entry

- ⑦ Contact Plated
0=Tin
1=Gold Flash
2=Gold 3u"
3=Gold 5u"
4=Gold 10u"
5=Gold 15u"
6= Gold 30u"

- ⑧ Material Type
0=PPS
1=PBT
2=LCP
3=Nylon-66
4=Nylon-6T
5=PA46

- ⑨ Color: 1=Black
⑩ Customer Request