

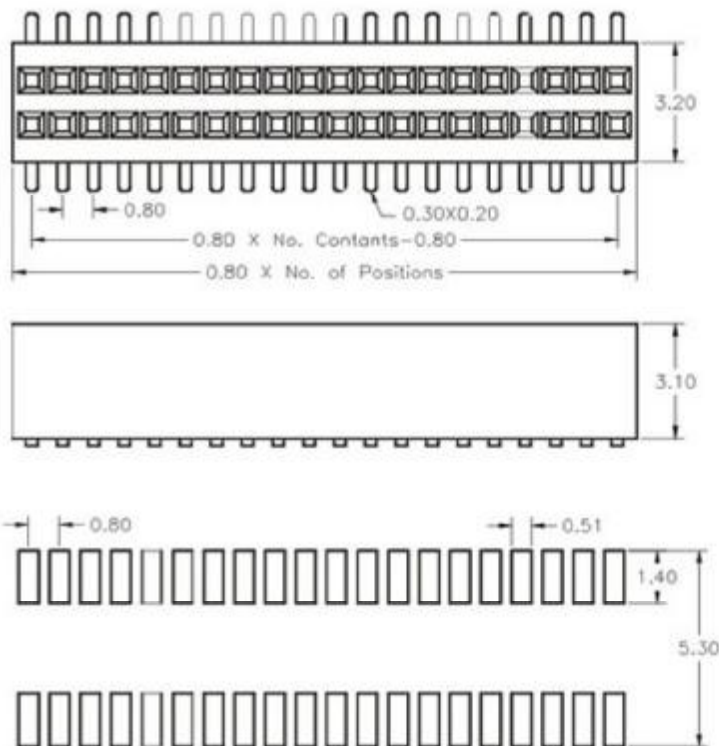


WOXCONN ELECTRONICS (SHEN ZHEN) CO., LTD

0.8*1.2mm Female Header, Dual Row, S. M. T

SPECIFICATIONS

Current Rating : 0.75AMP
Operation Temperature: -40° C to +105° C
Contact Resistance : 30mΩ Max.
Insulation Resistance: 1000MΩ Min.
Withstanding Voltage : AC 500V
Insulator Material : High Temperature Thermoplastic (UL94V-0)
Contact Material : Phosphor Bronze
Contact plating : Au over 50 u" Ni

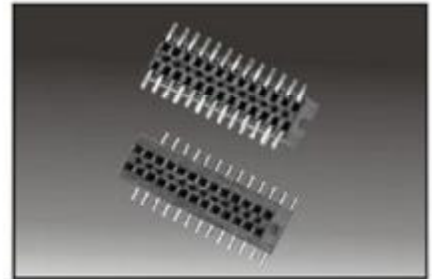

PCB LAYOUT

Ordering Information

2 6 31 — 2	<u>XX</u>	M	<u>G0</u>	<u>C</u>	T N 01
	No. of Pins Per Row	Contact Plating	Material Type		
	03~50	G0 : Gold Flash	C: Nylon-6T		
		G2 : 5u" Gold	D: LCP		
		G3 : 10u" Gold	E: Nylon-46		
		G4 : 15u" Gold			
		G5 : 30u" Gold			
		S0 : Gold Flash/Tin			
		Standard: G0			

Http://www.woxconn.com

E-mail:@woxconn.com

Tel:86-0755-29591214

Tel:86-0755-27951049

Add:Yicheng Induarial District Xixiang Town,BaoAn District,ShenZhen,Guangdong,China.