

SPECIFICATIONS

Mechanical

Contact Retention Force: 0.10kg min.

Durability : 25 Cycles

Electrical

Voltage Rating: 25V

Current Rating: 0.3A

Contact Resistance: 50mW max.

Dielectric Withstanding Voltage: 250V AC/1 min.

Insulation Resistance: 100MW

Physical

Housing: Thermoplastic, UL 94V-0 rated in Ivory Color

Contact: Copper alloy

Plating: See "ORDERING INFORMATION"

Metal Spring: Copper alloy

Operating Temperature: -40 to +85


DDR II SO DIMM Socket

AS Series


9.2 mm Height SMT Type

0.60mm [.024"] Pitch

200 Pos.

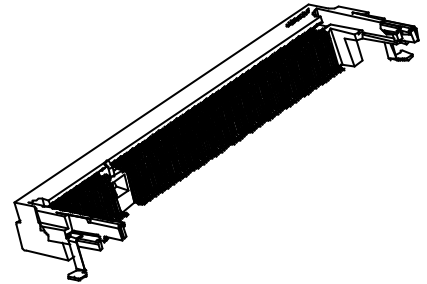

DRAWING

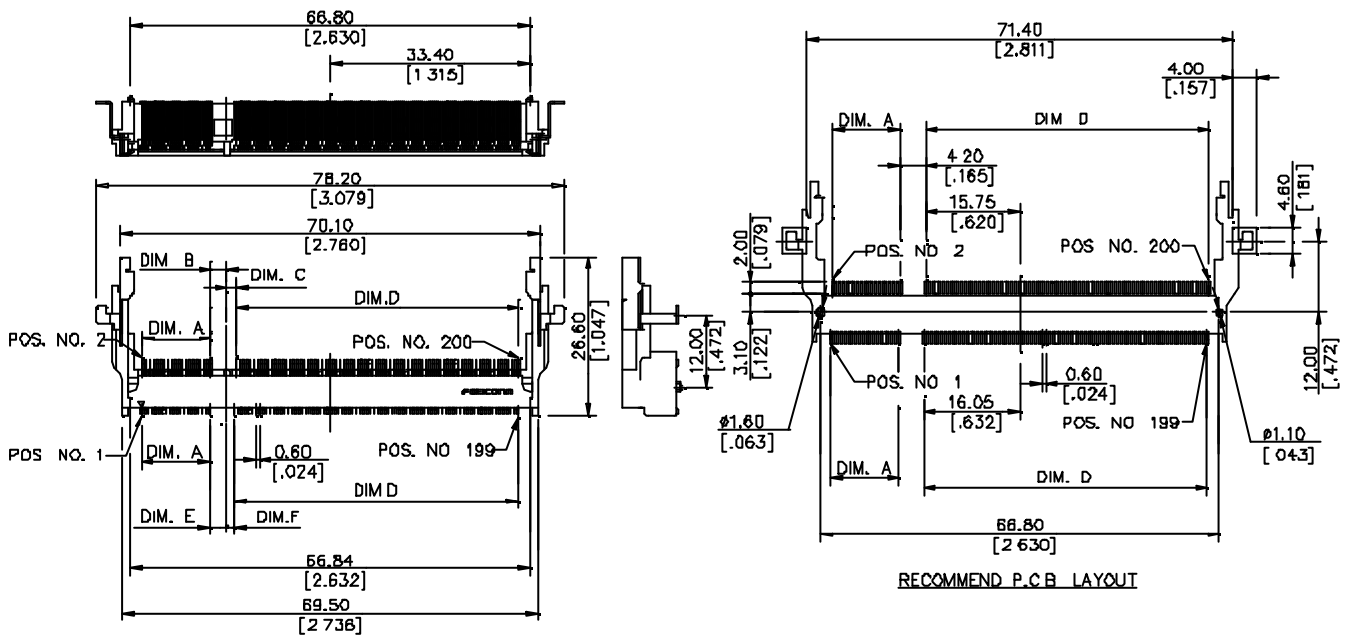

ORDERING INFORMATION

PRODUCT NO.: A S O A4 2 6 - N A * N - * F

Memory Module Socket

Horizontal Type

Single Row

No. of Pos.

A4=200 Pos.

SMT Type

Contact Area Plating

6=10u" Gold

F=Lead Free

4=Soft Tray

7=Tape Reel

N=Normal Type

S=Standard Type

R=Reverse Type

A=9.2mm Height

N=DDR II SO DIMM

ASOA426-NARN-*F	11.40 [.449]	1.80 [.071]	2.40 [.094]
ASOA426-NASN-*F	47.40 [1.866]	2.70 [.108]	1.50 [.059]
P/N	DIM. D	DIM. E	DIM. F
ASOA426-NARN-*F	47.40 [1.866]	1.50 [.059]	2.70 [.108]
ASOA426-NASN-*F	11.40 [.449]	2.40 [.094]	1.80 [.071]
P/N	DIM. A	DIM. B	DIM. C