

深圳市汉华光电电子有限公司

Shen Zhen Hanhua Electronic Co., Ltd.

SPECIFICATION FOR APPROVAL

承 认 书

CUSTOMER'S CODE

客户代码 _____

DESCRIPTION

品 名 发光二极管 _____

SPECIFICATION

规 格 2*5*7红黄绿双色三脚共阴 _____

DATE

送样日期 2009-05-18 _____

PART NO.

本厂型号 HHE-257CHH-RYGW10 _____

REFERENCE No.

档案号 0905019 _____

NUMBER OF SAMPLE

送样数量 20 pcs _____

COPY OF ACKNOWLEDGEMENT

承认书份数 _____

Approved By Customer 客户承认	Qualified By 核 准	Form Designer 制 作

深圳市汉华光电有限公司


Shen Zhen Hanhua Electronic Co., Ltd.

Product features

High brightness white LED 2*5*7mm round package
Light output intensity "C" grade Viewing angle 70 degree.
Epoxy lens color: Water Clear

Package dimension

Schematic drawing (unit in mm)

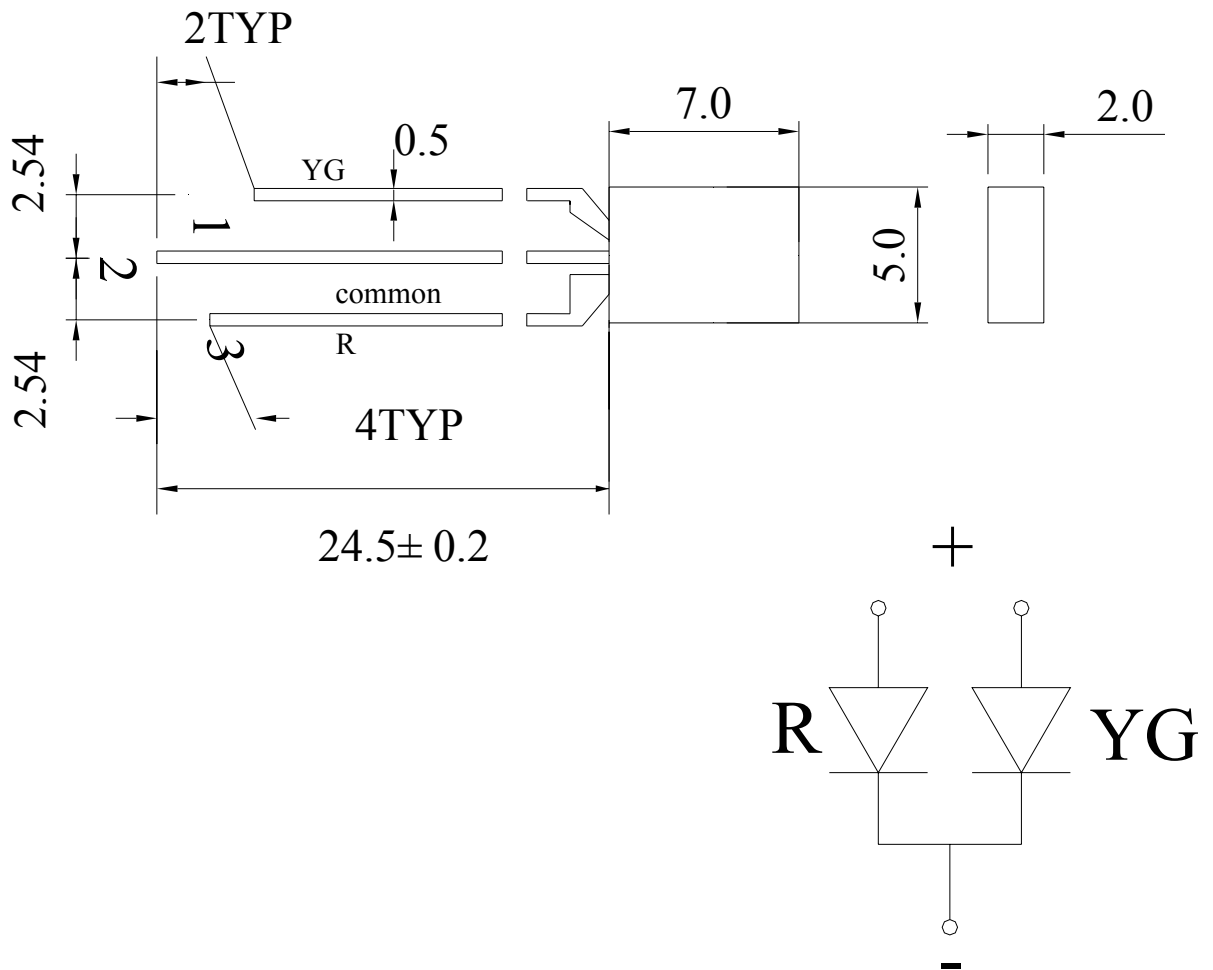

PART NO.:HHE-257CHH-RYGW10

PAGE: 1 of 4

Reference NO.: 0905019

深圳市汉华光电子有限公司

Shen Zhen Hanhua Electronic Co., Ltd.

ABSOLUTE MAXIMUM RATING

Item	SYMBOL	Absolute Maximum Rating	UNIT
Forward Current	IF	30	mA
Peak Forward Current	Ifp	100*	mA
Reverse Voltage	VR	5	V
Power Dissipation	PD	70	mw
Electrostatic discharge	ESD	400	V
Operation Temperature	TOPR	-25°C to +80°C	°C
Storage Temperature	TSTG	-40°C to +80°C	°C
Lead Soldering Temperature	TSOL	Max.330 °C for 3sec Max	

* Ifp Conditions:Pulse Wid \leq 10msec \leq 1/10

* Tsol Conditions:3mm from the base of the epoxy bulb

Typical Optical/Electrical Characteristics

Emitting Color	VF(V)			IV(mcd)			IR(μ A) VR=5V	WL(nm)	Viewing Angle 2 θ 1/2
	IF=20mA			IF=20mA					
	Min	Typ	Max	Min	Typ	Max			
Red	1.8	2.0	2.2	100	200	300	<10	620-630	70
Yellow Green	2.0	2.3	2.5	200	300	400		568-573	

Notes:

1. Work absolute ratings Ta=25°C

2. Tolerance of measurement of forward voltage \pm 0.1V

PART NO.:HHE-257CHH-RYGW10

PAGE: 2 of 4

Reference NO.: 0905019


深圳市汉华光电子有限公司

Shen Zhen Hanhua Electronic Co., Ltd.



TYPICAL ELECTRICAL / OPTICAL CHARACTERISTIC CURVES

(25 ° Ambient Temperature Unless Otherwise Noted)

Spotial Distrtrbution



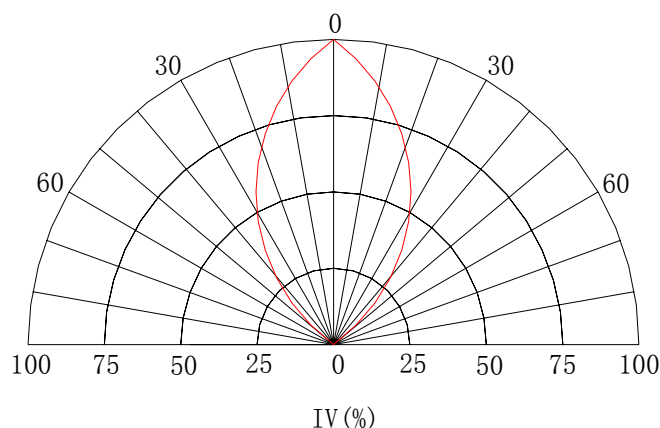


Typical electrical-optical Characteristics curvers

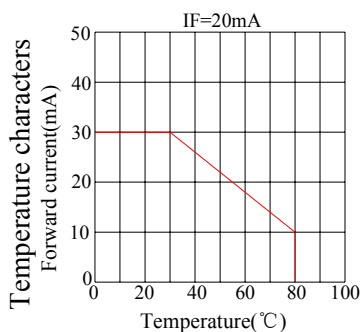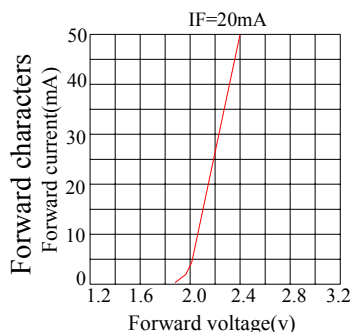

Notes:

The data are an typical presentation of the product, Contact customer service for details of technical information and warranty. The product is sensitive to static antistatic operation environment is recommended Products are shipped in either bulk bag package or taping.

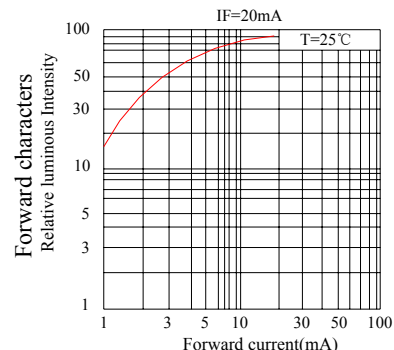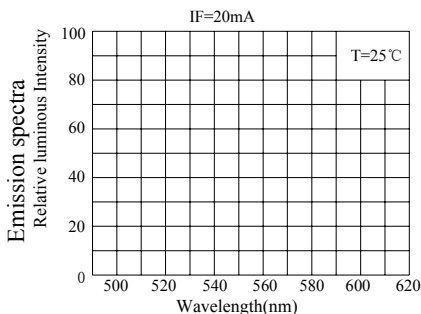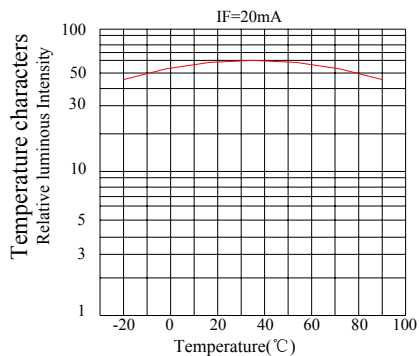

深圳市汉华光电子有限公司

Shen Zhen Hanhua Electronic Co., Ltd.

LED LAMP RELIABILITY

● Test Items And Results

Type	Test Item	REF. Standard	Test Condition	Note	Number of Damaged
Environmental Sequence	Temperature Cycle	JIS C 7021 (1997) A-4	-20°C → 25°C → 80°C → 25°C 30mins,5mins,30mins,5mins	100 cycles	0/100
	High Humidity Heat Cycle	JIS C 7021 (1997) A-5	30°C → 65°C 90%RH 24hrs/1cycle	10 cycles	0/100
	High Temperature Storage	JIS C 7021 (1997) B-10	Ta=80°C	1000hrs	0/100
	Humidity Heat Storage	JIS C 7021 (1997) B-11	Ta=60°C RH=90%	1000hrs	0/100
	Low Temperature Storage	JIS C 7021 (1997) B-12	Ta= -30°C	1000hrs	0/100
Operation Sequence	Life Test	JIS C 7035 (1985)	Ta=25°C I _F =20mA	1000hrs	0/100
	High Humidity Heat Life Test	*	60°C RH=90% I _F =20mA	500hrs	0/100
	Low Temperature Life Test	*	Ta= -20 °C I _F =20mA	1000hrs	0/100
Destructive Sequence	Resistance to Soldering Heat	JIS C 7021 (1997) A-11	Tsol=260 ± 5°C,10sec (3mm from the base of the epoxy bulb)	1 time	0/20
	Solderability	JIS C 7021 (1997) A-2	Tsol=235 ± 5°C,5sec (Using flux)	1 time (over 95%)	0/20
	Lead Pull/Bend Test	JIS C 7021 (1997)A-11	Load 2.5N (0.25kgf) 0° → 90° → 0° Bending 3 times	No noticeable damage	0/20

* Refer to reliability test standard specification for in this line.

● Criteria for Judging The Damage

Item	Symbol	Test Condition	Criteria for Judgment	
			Min.	Max.
Forward Voltage	V _F	I _F = 20mA	---	Initial data x 1.1
Reverse Current	I _R	V _R = 5V	---	Initial data x 2.0
Luminous Intensity	I _v	I _F = 20mA	Initial data x 0.7	---

PART NO.:HHE-257CHH-RYGW10

PAGE: 4 of 4

Reference NO.: 0905019