



GENERAL TECHNICAL CHARACTERISTICS

Dielectric : Polypropylene film
 Construction : Extended metallized film
 with internal series connection
 Coating : Solvent resistant plastic case with resin sealing .
 Flame retardant execution (UL94V-0).
 Leads: Tinned copper wire, 2 leads, 4 leads, 6 leads

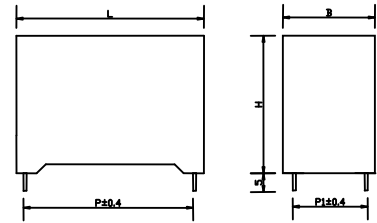


ELECTRICAL CHARACTERISTICS

Operating temperature range(case) : - 40 to + 85 °C
 Capacitance : 0.01 to 9.0µF
 Rated Voltage : 700 to 3000 Vdc
 Tolerance : ± 5%, ± 10%
 Dissipation factor: Measured at 1000±20 Hz AND 25±5°C.
 When $Cr \leq 1.0\mu F$, 4×10^{-4} ;
 When $Cr > 1.0\mu F$, 6×10^{-4}
 Life expectancy : 100,000 hours at U_r and 70 °C

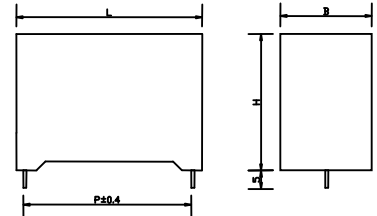

TEST METHODS AND PERFORMANCES

Dielectric strength: 2Ur (DC) applied for 10s at 25±5°C
 (1 minute for type test)
 Test voltage terminal to case : 3 KV 50Hz for 60 sec
 Insulation resistance : 30000s but need not exceed 30GΩ
 (typical value), after 1 minute of
 electrification at 100Vdc (25±5°C)

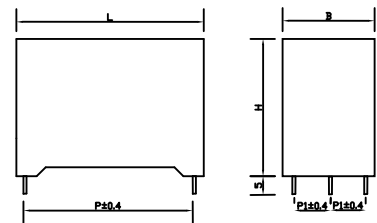

Electrical specifications, ordering codes

art Number	Cap (µF)	Dimension (mm)						du/dt (v/µs)	Ipeak (A)	Irms (A)	ESR (mΩ)
		L	B	H	P	P1	d				
Ur 700Vdc, Urms 380Vac, Upk 1000Vdc											
STE-700-0.22-2	0.22	31	9	18.0	27.5		0.8	185	41	5.0	9.8
STE-700-0.33-2	0.33	31	11	20.0	27.5		0.8	185	61	7.0	7.0
STE-700-0.47-2	0.47	31	13	22.0	27.5		1.0	185	87	8.5	5.1
STE-700-0.68-2	0.68	31	15	24.5	27.5		1.0	185	126	9.0	4.9
STE-700-1.0-2	1.0	31	17	28.0	27.5		1.2	185	185	12.0	3.9
STE-700-1.0-4	1.0	31	17	28.0	27.5	5.1	1.2	185	185	16.5	3.3
STE-700-1.5-2	1.5	31	22	31.0	27.5		1.2	185	278	12.0	3.3
STE-700-1.5-4	1.5	31	22	31.0	27.5	10.2	1.2	185	278	19.5	2.7
STE-700-1.5-2	1.5	42.5	17	28.0	37.5		1.2	130	195	12.0	4.1
STE-700-2.2-2	2.2	42.5	22	30.0	37.5		1.2	130	286	12.0	3.7
STE-700-3.0-2	3.0	42.5	28	37.0	37.5		1.2	130	390	12.0	3.3
STE-700-3.0-4	3.0	42.5	28	37.0	37.5	10.2	1.2	130	390	21.0	2.7
STE-700-3.3-2	3.3	42.5	28	37.0	37.5		1.2	130	429	12.0	3.1
STE-700-3.3-4	3.3	42.5	28	37.0	37.5	10.2	1.2	130	429	21.5	2.5
STE-700-3.9-2	3.9	42.5	30	45.0	37.5		1.2	130	507	12.0	2.8
STE-700-3.9-4	3.9	42.5	30	45.0	37.5	20.3	1.2	130	507	22.0	2.2
STE-700-4.7-2	4.7	42.5	30	45.0	37.5		1.2	130	611	12.0	2.4
STE-700-4.7-4	4.7	42.5	30	45.0	37.5	20.3	1.2	130	611	22.0	1.8
STE-700-4.7-6	4.7	42.5	30	45.0	37.5	10.2	1.2	130	611	26.5	1.8
STE-700-5.0-2	5.0	42.5	30	45.0	37.5		1.2	130	650	12.0	2.4
STE-700-5.0-4	5.0	42.5	30	45.0	37.5	20.3	1.2	130	650	22.0	1.8
STE-700-5.0-6	5.0	42.5	30	45.0	37.5	10.2	1.2	130	650	27.5	1.8

Electrical specifications, ordering codes

Part Number	Cap (µF)	Dimension (mm)						du/dt (v/µs)	Ipeak (A)	Irms (A)	ESR (mΩ)
		L	B	H	P	P1	d				
STE-700-6.8-2	6.8	57.5	30	45.0	52.5		1.2	90	612	12.0	3.0
STE-700-6.8-4	6.8	57.5	30	45.0	52.5	20.3	1.2	90	612	22.0	2.3
STE-700-6.8-6	6.8	57.5	30	45.0	52.5	10.2	1.2	90	612	27.0	2.3
STE-700-9.0-2	9.0	57.5	35	50.0	52.5		1.2	90	810	12.0	2.6
STE-700-9.0-4	9.0	57.5	35	50.0	52.5	20.3	1.2	90	810	22.0	1.9
STE-700-9.0-6	9.0	57.5	35	50.0	52.5	10.2	1.2	90	810	31.5	1.9
Ur 850Vdc, Urms 450Vac, Upk 1200Vdc											
STE-850-0.15-2	0.15	31	9	18.0	27.5		0.8	300	45	4.0	10.7
STE-850-0.22-2	0.22	31	11	20.0	27.5		0.8	300	66	5.5	8.3
STE-850-0.33-2	0.33	31	13	22.0	27.5		1.0	300	99	8.5	6.3
STE-850-0.47-2	0.47	31	15	24.5	27.5		1.0	300	141	9.0	5.1
STE-850-0.68-2	0.68	31	17	28.0	27.5		1.2	300	204	12.0	3.7
STE-850-0.68-4	0.68	31	17	28.0	27.5	5.1	1.2	300	204	16.5	3.1
STE-850-1.0-2	1.0	31	22	31.0	27.5		1.2	300	300	12.0	3.0
STE-850-1.0-4	1.0	31	22	31.0	27.5	10.2	1.2	300	300	20.5	2.4
STE-850-1.0-2	1.0	42.5	17	28.0	37.5		1.2	200	200	12.0	3.9
STE-850-1.5-2	1.5	42.5	22	30.0	37.5		1.2	200	300	12.0	3.4
STE-850-2.2-2	2.2	42.5	28	37.0	37.5		1.2	200	440	12.0	2.8
STE-850-2.2-4	2.2	42.5	28	37.0	37.5	10.2	1.2	200	440	22.0	2.2
STE-850-2.5-2	2.5	42.5	28	37.0	37.5		1.2	200	500	12.0	2.6
STE-850-2.5-4	2.5	42.5	28	37.0	37.5	20.3	1.2	200	500	22.0	2.0
STE-850-3.0-2	3.0	42.5	30	45.0	37.5		1.2	200	600	12.0	2.4
STE-850-3.0-4	3.0	42.5	30	45.0	37.5	20.3	1.2	200	600	22.0	1.8
STE-850-3.0-6	3.0	42.5	30	45.0	37.5	10.2	1.2	200	600	25.5	1.8
STE-850-3.3-2	3.3	42.5	30	45.0	37.5		1.2	200	660	12.0	2.3
STE-850-3.3-4	3.3	42.5	30	45.0	37.5	20.3	1.2	200	660	22.0	1.7
STE-850-3.3-6	3.3	42.5	30	45.0	37.5	10.2	1.2	200	660	27.0	1.7
STE-850-4.0-2	4.0	57.5	30	45.0	52.5		1.2	110	440	12.0	3.1
STE-850-4.0-4	4.0	57.5	30	45.0	52.5	20.3	1.2	110	440	22.0	2.5
STE-850-4.0-6	4.0	57.5	30	45.0	52.5	10.2	1.2	110	440	27.0	2.5
STE-850-4.7-2	4.7	57.5	30	45.0	52.5		1.2	110	517	12.0	2.7
STE-850-4.7-4	4.7	57.5	30	45.0	52.5	20.3	1.2	110	517	22.0	2.1
STE-850-4.7-6	4.7	57.5	30	45.0	52.5	10.2	1.2	110	517	27.5	2.1
STE-850-5.6-2	5.6	57.5	35	50.0	52.5		1.2	110	616	12.0	2.5
STE-850-5.6-4	5.6	57.5	35	50.0	52.5	20.3	1.2	110	616	22.0	1.9
STE-850-5.6-6	5.6	57.5	35	50.0	52.5	10.2	1.2	110	616	31.0	1.9
STE-850-6.0-2	6.0	57.5	35	50.0	52.5		1.2	110	660	12.0	2.4
STE-850-6.0-4	6.0	57.5	35	50.0	52.5	20.3	1.2	110	660	22.0	1.8
STE-850-6.0-6	6.0	57.5	35	50.0	52.5	10.2	1.2	110	660	31.5	1.8
Ur 1000Vdc, Urms 480Vac, Upk1400Vdc											
STE-1000-0.10-2	0.10	31	9	18.0	27.5		0.8	340	34	5.0	12.4
STE-1000-0.15-2	0.15	31	11	20.0	27.5		0.8	340	51	5.5	9.2
STE-1000-0.22-2	0.22	31	13	22.0	27.5		0.8	340	75	7.0	7.5
STE-1000-0.33-2	0.33	31	15	24.5	27.5		1.0	340	112	9.0	5.7
STE-1000-0.47-2	0.47	31	17	28.0	27.5		1.2	340	160	11.0	4.7
STE-1000-0.47-4	0.47	31	17	28.0	27.5	5.1	1.2	340	160	13.0	4.1
STE-1000-0.68-2	0.68	31	18	33.0	27.5		1.2	340	231	12.0	3.6
STE-1000-0.68-4	0.68	31	18	33.0	27.5	10.2	1.2	340	231	17.0	3.1
STE-1000-0.68-2	0.68	42.5	17	28.0	37.5		1.2	225	153	12.0	4.7

Electrical specifications, ordering codes

Part Number	Cap (µF)	Dimension (mm)						du/dt (v/µs)	Ipeak (A)	Irms (A)	ESR (mΩ)
		L	B	H	P	P1	d				
STE-1000-1.0-2	1.0	42.5	22	30.0	37.5		1.2	225	225	12.0	3.9
STE-1000-1.0-4	1.0	42.5	22	30.0	37.5	10.2	1.2	225	225	19.0	3.4
STE-1000-1.5-2	1.5	42.5	28	37.0	37.5		1.2	225	338	12.0	3.1
STE-1000-1.5-4	1.5	42.5	28	37.0	37.5	20.3	1.2	225	338	21.5	2.5
STE-1000-1.8-2	1.8	42.5	28	37.0	37.5		1.2	225	405	12.0	2.8
STE-1000-1.8-4	1.8	42.5	28	37.0	37.5	20.3	1.2	225	405	22.0	2.2
STE-1000-2.2-2	2.2	42.5	30	45.0	37.5		1.2	225	495	12.0	2.5
STE-1000-2.2-4	2.2	42.5	30	45.0	37.5	20.3	1.2	225	495	22.0	1.9
STE-1000-2.2-6	2.2	42.5	30	45.0	37.5	10.2	1.2	225	495	27.0	1.8
STE-1000-2.5-2	2.5	42.5	30	45.0	37.5		1.2	225	563	12.0	2.5
STE-1000-2.5-4	2.5	42.5	30	45.0	37.5	20.3	1.2	225	563	22.0	1.8
STE-1000-2.5-6	2.5	42.5	30	45.0	37.5	10.2	1.2	225	563	28.0	1.8
STE-1000-3.3-2	3.3	57.5	30	45.0	52.5		1.2	135	446	12.0	3.0
STE-1000-3.3-4	3.3	57.5	30	45.0	52.5	20.3	1.2	135	446	22.0	2.4
STE-1000-3.3-6	3.3	57.5	30	45.0	52.5	10.2	1.2	135	446	26.0	2.4
STE-1000-4.7-2	4.7	57.5	35	50.0	52.5		1.2	135	635	12.0	2.5
STE-1000-4.7-4	4.7	57.5	35	50.0	52.5	20.3	1.2	135	635	22.0	1.9
STE-1000-4.7-6	4.7	57.5	35	50.0	52.5	10.2	1.2	135	635	31.5	1.9
Ur 1200Vdc, Urms 500Vac, Upk 1600Vdc											
STE-1200-0.10-2	0.10	31	11	20.0	27.5		0.8	390	39	4.0	13.5
STE-1200-0.15-2	0.15	31	11	20.0	27.5		0.8	390	59	6.0	9.8
STE-1200-0.22-2	0.22	31	13	22.0	27.5		1.0	390	86	7.5	7.0
STE-1200-0.33-4	0.33	31	15	24.5	27.5	5.1	1.2	390	129	14.0	4.5
STE-1200-0.33-2	0.33	31	15	24.5	27.5		1.2	390	129	12.0	5.1
STE-1200-0.47-2	0.47	31	18	33.0	27.5		1.2	390	183	12.0	3.6
STE-1200-0.47-4	0.47	31	18	33.0	27.5	5.1	1.2	390	183	17.0	3.0
STE-1200-0.47-2	0.47	42.5	15	26.0	37.5		1.2	255	120	11.0	5.4
STE-1200-0.68-2	0.68	31	22	31.0	27.5		1.2	390	265	12.0	2.7
STE-1200-0.68-4	0.68	31	22	31.0	27.5	10.2	1.2	390	265	19.0	2.1
STE-1200-0.68-2	0.68	42.5	22	30.0	37.5		1.2	255	173	12.0	2.9
STE-1200-0.68-4	0.68	42.5	22	30.0	37.5	10.2	1.2	255	173	17.0	2.3
STE-1200-1.0-2	1.0	42.5	28	37.0	37.5		1.2	255	255	12.0	4.0
STE-1200-1.0-4	1.0	42.5	28	37.0	37.5	10.2	1.2	255	255	20.0	3.7
STE-1200-1.2-2	1.2	42.5	28	37.0	37.5		1.2	255	306	12.0	3.6
STE-1200-1.2-4	1.2	42.5	28	37.0	37.5	10.2	1.2	255	306	22.0	3.0
STE-1200-1.5-2	1.5	42.5	28	37.0	37.5		1.2	255	383	12.0	3.2
STE-1200-1.5-4	1.5	42.5	28	37.0	37.5	20.3	1.2	255	383	21.5	2.6
STE-1200-2.0-2	2.0	42.5	33	45.0	37.5		1.2	255	510	12.0	2.6
STE-1200-2.0-4	2.0	42.5	33	45.0	37.5	20.3	1.2	255	510	22.0	2.0
STE-1200-2.2-2	2.2	57.5	30	45.0	52.5		1.2	150	330	12.0	3.4
STE-1200-2.2-4	2.2	57.5	30	45.0	52.5	20.3	1.2	150	330	22.0	2.7
STE-1200-2.5-2	2.5	57.5	30	45.0	52.5		1.2	150	375	12.0	3.1
STE-1200-2.5-4	2.5	57.5	30	45.0	52.5	20.3	1.2	150	375	22.0	2.4
STE-1200-2.5-6	2.5	57.5	30	45.0	52.5	10.2	1.2	150	375	26.0	2.4
STE-1200-3.0-2	3.0	57.5	35	50.0	52.5		1.2	150	450	12.0	2.7
STE-1200-3.0-4	3.0	57.5	35	50.0	52.5	20.3	1.2	150	450	22.0	2.0
STE-1200-3.0-6	3.0	57.5	35	50.0	52.5	10.2	1.2	150	450	29.5	2.0
STE-1200-3.3-2	3.3	57.5	35	50.0	52.5		1.2	150	495	12.0	2.7
STE-1200-3.3-4	3.3	57.5	35	50.0	52.5	20.3	1.2	150	495	22.0	2.0
STE-1200-3.3-6	3.3	57.5	35	50.0	52.5	10.2	1.2	150	495	30.5	2.0

Electrical specifications, ordering codes


Part Number	Cap (µF)	Dimension (mm)						du/dt (v/µs)	Ipeak (A)	Irms (A)	ESR (mΩ)
		L	B	H	P	P1	d				
Ur 1500Vdc, Urms 575Vac, Upk 2000Vdc											
STE-1500-0.068-2	0.068	31	9	18.0	27.5		0.8	490	33	3.5	16.0
STE-1500-0.10-2	0.10	31	11	20.0	27.5		0.8	490	49	5.0	11.9
STE-1500-0.12-2	0.12	31	13	22.0	27.5		1.0	490	59	6.0	10.0
STE-1500-0.15-2	0.15	31	15	24.5	27.5		1.0	490	74	7.0	8.7
STE-1500-0.22-2	0.22	31	17	28.0	27.5		1.2	490	108	10.0	6.6
STE-1500-0.33-2	0.33	31	18	33.0	27.5		1.2	490	162	12.0	4.6
STE-1500-0.33-4	0.33	31	18	33.0	27.5	5.1	1.2	490	162	15.0	4.0
STE-1500-0.33-2	0.33	42.5	17	28.0	37.5		1.2	320	106	10.0	6.2
STE-1500-0.47-2	0.47	42.5	22	30.0	37.5		1.2	320	150	12.0	3.6
STE-1500-0.47-4	0.47	42.5	22	30.0	37.5	10.2	1.2	320	150	14.0	3.6
STE-1500-0.68-2	0.68	42.5	28	37.0	37.5		1.2	320	218	12.0	4.4
STE-1500-0.68-4	0.68	42.5	28	37.0	37.5	10.2	1.2	320	218	18.0	3.8
STE-1500-0.82-2	0.82	42.5	28	37.0	37.5		1.2	320	262	12.0	3.5
STE-1500-0.82-4	0.82	42.5	28	37.0	37.5	20.3	1.2	320	262	20.5	2.9
STE-1500-1.0-2	1.0	42.5	28	37.0	37.5		1.2	320	320	12.0	3.2
STE-1500-1.0-4	1.0	42.5	28	37.0	37.5	20.3	1.2	320	320	22.0	2.6
STE-1500-1.2-2	1.2	42.5	30	45.0	37.5		1.2	320	384	12.0	2.7
STE-1500-1.2-4	1.2	42.5	30	45.0	37.5	20.3	1.2	320	384	22.0	2.1
STE-1500-1.2-6	1.2	42.5	30	45.0	37.5	10.2	1.2	320	384	25.0	2.1
STE-1500-1.5-2	1.5	57.5	30	45.0	52.5		1.2	175	263	12.0	3.8
STE-1500-1.5-4	1.5	57.5	30	45.0	52.5	20.3	1.2	175	263	22.0	3.1
STE-1500-2.0-2	2.0	57.5	35	50.0	52.5		1.2	175	350	12.0	3.3
STE-1500-2.0-4	2.0	57.5	35	50.0	52.5	20.3	1.2	175	350	22.0	2.6
STE-1500-2.0-6	2.0	57.5	35	50.0	52.5	10.2	1.2	175	350	27.0	2.6
STE-1500-2.2-2	2.2	57.5	35	50.0	52.5		1.2	175	385	12.0	3.2
STE-1500-2.2-4	2.2	57.5	35	50.0	52.5	20.3	1.2	175	385	22.0	2.5
STE-1500-2.2-6	2.2	57.5	35	50.0	52.5	10.2	1.2	175	385	27.5	2.5
Ur 2000Vdc, Urms 630Vac, Upk 2400Vdc											
STE-2000-0.033-2	0.033	31	9	18.0	27.5		0.8	650	21	3.0	29.0
STE-2000-0.047-2	0.047	31	11	20.0	27.5		0.8	650	31	3.5	20.0
STE-2000-0.068-2	0.068	31	11	20.0	27.5		0.8	650	44	5.0	14.8
STE-2000-0.10-2	0.10	31	15	24.5	27.5		1.0	650	65	6.5	11.2
STE-2000-0.15-2	0.15	31	17	28.0	27.5		1.2	650	98	9.0	7.8
STE-2000-0.22-2	0.22	31	18	33.0	27.5		1.2	650	143	12.0	5.5
STE-2000-0.22-2	0.22	42.5	17	28.0	37.5		1.2	410	90	9.5	7.2
STE-2000-0.33-2	0.33	42.5	22	30.0	37.5		1.2	650	215	12.0	5.5
STE-2000-0.33-4	0.33	42.5	22	30.0	37.5	10.2	1.2	650	215	15.0	5.0
STE-2000-0.47-2	0.47	42.5	28	37.0	37.5		1.2	410	193	12.0	4.5
STE-2000-0.47-4	0.47	42.5	28	37.0	37.5	10.2	1.2	410	193	17.5	3.8
STE-2000-0.56-2	0.56	42.5	28	37.0	37.5		1.2	410	230	12.0	4.1
STE-2000-0.56-4	0.56	42.5	28	37.0	37.5	20.3	1.2	410	230	18.5	3.4
STE-2000-0.68-2	0.68	42.5	30	45.0	37.5		1.2	410	279	12.0	3.7
STE-2000-0.68-4	0.68	42.5	30	45.0	37.5	20.3	1.2	410	279	21.0	3.0
STE-2000-0.82-2	0.82	42.5	30	45.0	37.5		1.2	410	336	12.0	3.4
STE-2000-0.82-4	0.82	42.5	30	45.0	37.5	20.3	1.2	410	336	22.0	2.7
STE-2000-1.0-2	1.0	57.5	30	45.0	52.5		1.2	225	225	12.0	4.2
STE-2000-1.0-4	1.0	57.5	30	45.0	52.5	20.3	1.2	225	225	22.0	3.5
STE-2000-1.5-2	1.5	57.5	35	50.0	52.5		1.2	225	338	12.0	3.5
STE-2000-1.5-4	1.5	57.5	35	50.0	52.5	20.3	1.2	225	338	22.0	2.8
STE-2000-1.5-6	1.5	57.5	35	50.0	52.5	10.2	1.2	225	338	26.0	2.7

Electrical specifications, ordering codes

Part Number	Cap (µF)	Dimension (mm)						du/dt (v/µs)	Ipeak (A)	Irms (A)	ESR (mΩ)
		L	B	H	P	P1	d				
Ur 2500Vdc, Urms 700Vac, Upk 3000Vdc											
STE-2500-0.022-2	0.022	31	9	18.0	27.5		0.8	870	19	2.5	37.0
STE-2500-0.033-2	0.033	31	11	20.0	27.5		0.8	870	29	3.5	25.7
STE-2500-0.047-2	0.047	31	13	22.0	27.5		0.8	870	41	4.5	18.5
STE-2500-0.068-2	0.068	31	15	24.5	27.5		0.8	870	59	6.0	14.0
STE-2500-0.10-2	0.10	31	17	28.0	27.5		1.0	870	87	9.0	10.4
STE-2500-0.12-2	0.12	31	18	33.0	27.5		1.0	870	104	10.0	8.4
STE-2500-0.15-2	0.15	31	22	31.0	27.5		1.2	870	131	11.0	7.4
STE-2500-0.15-2	0.15	42.5	17	28.0	37.5		1.2	550	83	8.5	9.1
STE-2500-0.22-2	0.22	42.5	22	30.0	37.5		1.2	550	121	11.0	6.8
STE-2500-0.22-4	0.22	42.5	22	30.0	37.5	10.2	1.2	550	121	14.0	6.1
STE-2500-0.33-2	0.33	42.5	28	37.0	37.5		1.2	550	182	12.0	5.2
STE-2500-0.33-4	0.33	42.5	28	37.0	37.5	10.2	1.2	550	182	16.0	4.5
STE-2500-0.39-2	0.39	42.5	28	37.0	37.5		1.2	550	215	12.0	4.7
STE-2500-0.39-4	0.39	42.5	28	37.0	37.5	20.3	1.2	550	215	17.0	4.0
STE-2500-0.47-2	0.47	42.5	30	45.0	37.5		1.2	550	259	12.0	4.2
STE-2500-0.47-4	0.47	42.5	30	45.0	37.5	20.3	1.2	550	259	20.0	3.5
STE-2500-0.68-2	0.68	57.5	30	45.0	52.5		1.2	280	190	12.0	4.6
STE-2500-0.68-4	0.68	57.5	30	45.0	52.5	20.3	1.2	280	190	21.5	3.9
Ur 3000Vdc, Urms 750Vac, Upk 3500Vdc											
STE-3000-0.010-2	0.010	31	9	18.0	27.5		0.8	1200	12	2.0	67.0
STE-3000-0.015-2	0.015	31	9	18.0	27.5		0.8	1200	18	2.5	43.0
STE-3000-0.022-2	0.022	31	11	20.0	27.5		0.8	1200	26	3.5	31.0
STE-3000-0.033-2	0.033	31	13	22.0	27.5		0.8	1200	40	4.5	21.6
STE-3000-0.047-2	0.047	31	15	24.5	27.5		1.0	1200	56	7.0	15.8
STE-3000-0.068-2	0.068	31	22	31.0	27.5		1.0	1200	82	8.0	11.7
STE-3000-0.10-2	0.10	42.5	22	30.0	37.5		1.2	750	75	9.0	10.6
STE-3000-0.12-2	0.12	42.5	22	30.0	37.5		1.2	750	90	10.0	9.5
STE-3000-0.15-2	0.15	42.5	28	37.0	37.5		1.2	750	113	11.5	8.0
STE-3000-0.15-4	0.15	42.5	28	37.0	37.5	10.2	1.2	750	113	13.0	7.3
STE-3000-0.22-2	0.22	42.5	28	37.0	37.5		1.2	750	165	12.0	6.0
STE-3000-0.22-4	0.22	42.5	28	37.0	37.5	20.3	1.2	750	165	16.5	5.3
STE-3000-0.33-2	0.33	42.5	33	45.0	37.5		1.2	750	248	12.0	5.1
STE-3000-0.33-4	0.33	42.5	33	45.0	37.5	20.3	1.2	750	248	18.5	4.4
STE-3000-0.39-2	0.39	57.5	30	45.0	52.5		1.2	370	144	12.0	6.0
STE-3000-0.39-4	0.39	57.5	30	45.0	52.5	20.3	1.2	370	144	18.5	5.3
STE-3000-0.47-2	0.47	57.5	35	50.0	52.5		1.2	370	174	12.0	5.4
STE-3000-0.47-4	0.47	57.5	35	50.0	52.5	20.3	1.2	370	174	21.0	4.7
STE-3000-0.56-2	0.56	57.5	35	50.0	52.5		1.2	370	207	12.0	4.8
STE-3000-0.56-4	0.56	57.5	35	50.0	52.5	20.3	1.2	370	207	22.0	4.1

How to Order:

STE- 1200- 0.47- 2 V L



None for 5mm lead length and L for 30mm
 T for P=22.5, V for P=27.5, F for P=37.5, G for P=52.5
 Style of capacitor. 2for 2 leads, 4for 4leads, 6for 6leads
 Capacitance
 Voltage