


PQ075

Minimum Centers : 1.91(.075)

Probe

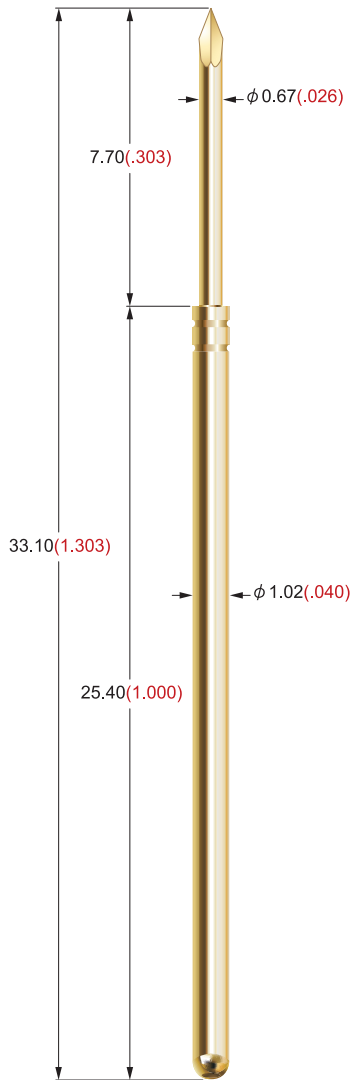

Tip Style	Becu Plunger	Tip Style	Steel Plunger
	ϕ 0.67(.026) A		ϕ 1.20(.047) 3BN50
	ϕ 1.20(.047) A120		ϕ 0.67(.026) B
	ϕ 0.67(.026) D		ϕ 0.67(.026) BP
	ϕ 0.50(.020) DV120		ϕ 0.67(.026) BT
	ϕ 0.67(.026) G		ϕ 0.67(.026) BV
	ϕ 0.67(.026) H		ϕ 0.67(.026) F
	ϕ 1.00(.039) H100/ ϕ 1.30(.051) 130		ϕ 0.50(.020) F050
	ϕ 1.20(.047) T120/ ϕ 1.50(.059) 150		ϕ 0.67(.026) IP
			ϕ 0.67(.026) 7J

Probe Specifications 探针规格

Minimum Centers 最小间距 : 1.91 (.075)
 Full Travel 最大行程 : 6.35 (.250)
 Current Rating 额定电流 : 3amps
 Probe Resistance 阻抗 : <20mΩ
 Operating Temp. 操作温度 : -10°C~+120°C

Spring Force 弹力

@4.00(.157) travel


57g	[2.0oz]	[0.56N]
101g	[3.6oz]	[1N]
156g	[5.5oz]	[1.5N]
200g	[7.0oz]	[2N]
250g	[8.9oz]	[2.5N]
284g	[10.0oz]	[2.8N]

How To Order Probes


Example : PQ075-BP-200-S

	Tip Style	Spring Force(g)	Steel Plunger
PQ075 -	BP	200	S
	针头类型	弹力(克)	钢针


Tip Style Steel Plunger

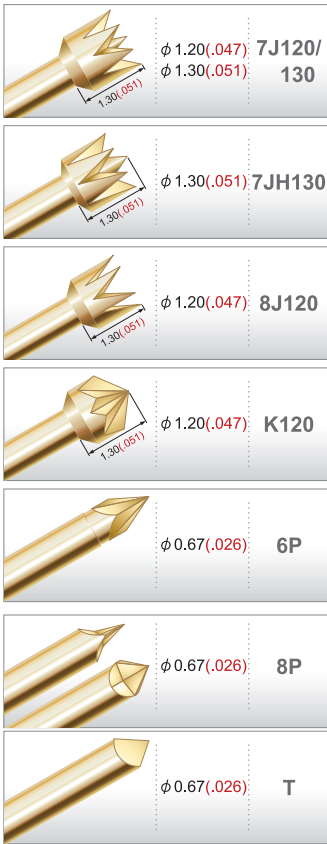


DCR75-CR

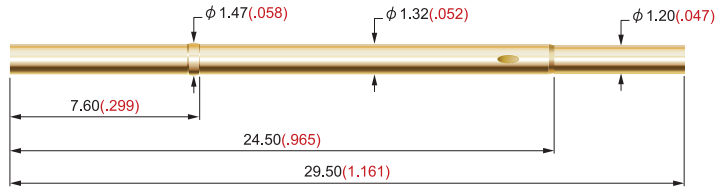

DCR75-SC

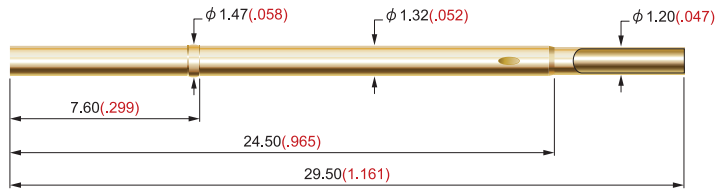

DCR75-WW-□

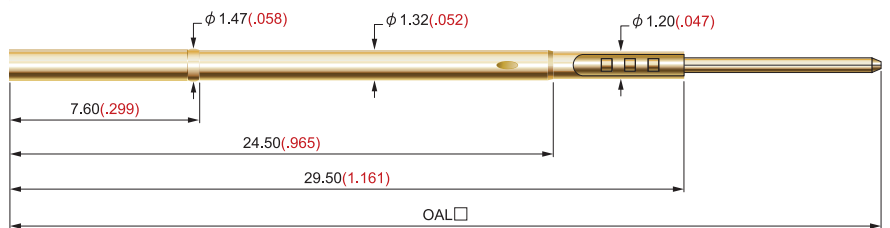

□ available in 36/40.61/43/47.6

Mounting Hole Size 安装孔径

- 1.35/1.40 (.0530)/(.0550)

Materials 材质

- Plunger 针头 : BeCu or Steel, gold plated 铍铜或高碳钢, 镀金
- Barrel 内管 : PhBr, gold plated 磷青铜, 镀金
- Spring 弹簧 : Stainless steel 不锈钢线
- Receptacle 套管 : Nickel Silver, gold plated 白铜, 镀金
- Square Post 四方柱 : Brass, gold plated 黄铜, 镀金

How To Order Receptacles

>> Part Number	>> Connections	>> Description
DCR75-CR	crimp 空管	length 29.5(1.161)
DCR75-SC	solder cup 焊杯	length 29.5(1.161)
DCR75-WW-36	square wire wrap post 绕线柱	length 36.00(1.417), post length 6.5(.256), vacuum sealed
DCR75-WW-40.61	square wire wrap post 绕线柱	length 40.61(1.599), post length 11.11(.437), vacuum sealed
DCR75-WW-43	square wire wrap post 绕线柱	length 43.00(1.693), post length 13.5(.531), vacuum sealed
DCR75-WW-47.6	square wire wrap post 绕线柱	length 47.60(1.874), post length 18.1(.713), vacuum sealed