


PQ050

Minimum Centers : 1.27(.050)


Probe

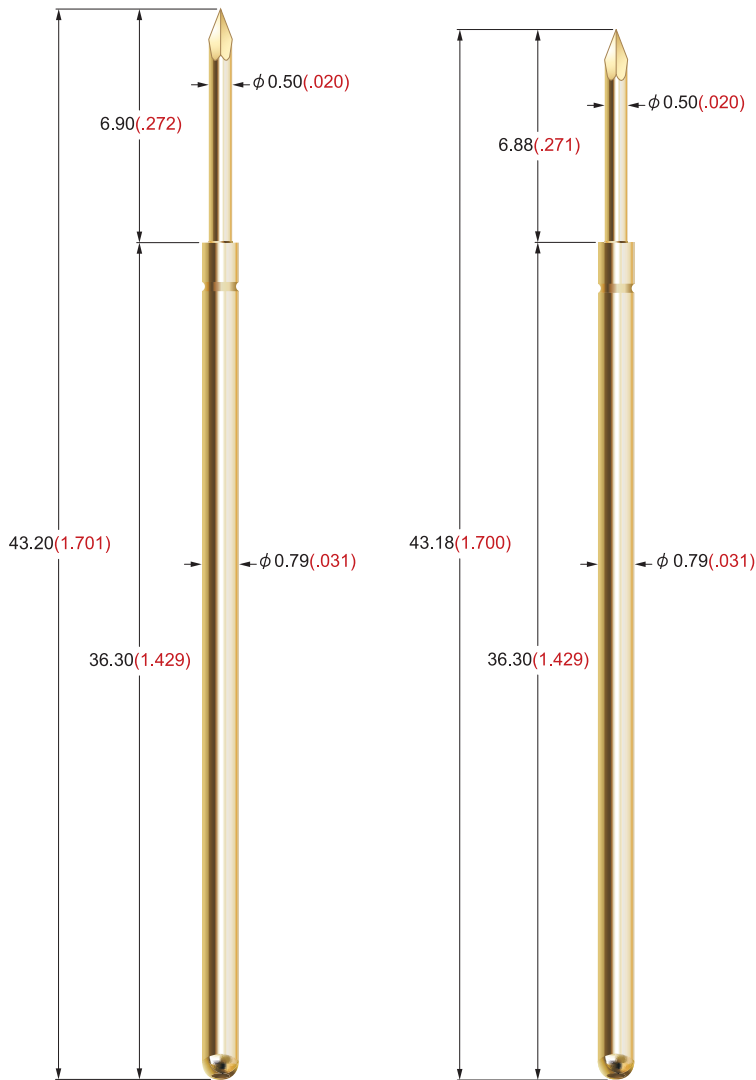

Tip Style BeCu Plunger



Tip Style Steel Plunger

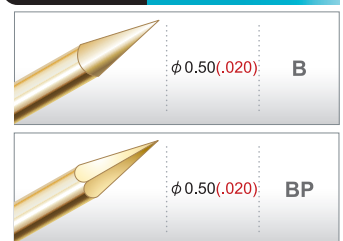

Probe Specifications 探针规格

Minimum Centers 最小间距 : 1.27 (.050)

Full Travel 最大行程 : 6.35 (.250)

Current Rating 额定电流 : 3amps

Probe Resistance 阻抗 : < 23mΩ

Operating Temp. 操作温度 : -10°C~+120°C

How To Order Probes

Example : PQ050-BP-202-S











	Tip Style	Spring Force(g)	Steel Plunger
PQ050 -	BP	202	S
	针头类型	弹力(克)	钢针


Spring Force 弹力

@4.00(.157) travel

101g	[3.6oz]	[1N]
151g	[5.4oz]	[1.5N]
202g	[7.2oz]	[2N]
286g	[10.2oz]	[2.83N]

Receptacle

Tip Style	Steel Plunger
	ϕ 0.50(.020) BT
	ϕ 0.28(.011) F028
	ϕ 0.50(.020) F
	ϕ 0.50(.020) IP
	ϕ 0.50(.020) IPW
	ϕ 0.50(.020) 6P
	ϕ 0.50(.020) 6PW
	ϕ 0.50(.020) 8P
	ϕ 0.89(.035) 8P089
	ϕ 0.50(.020) T

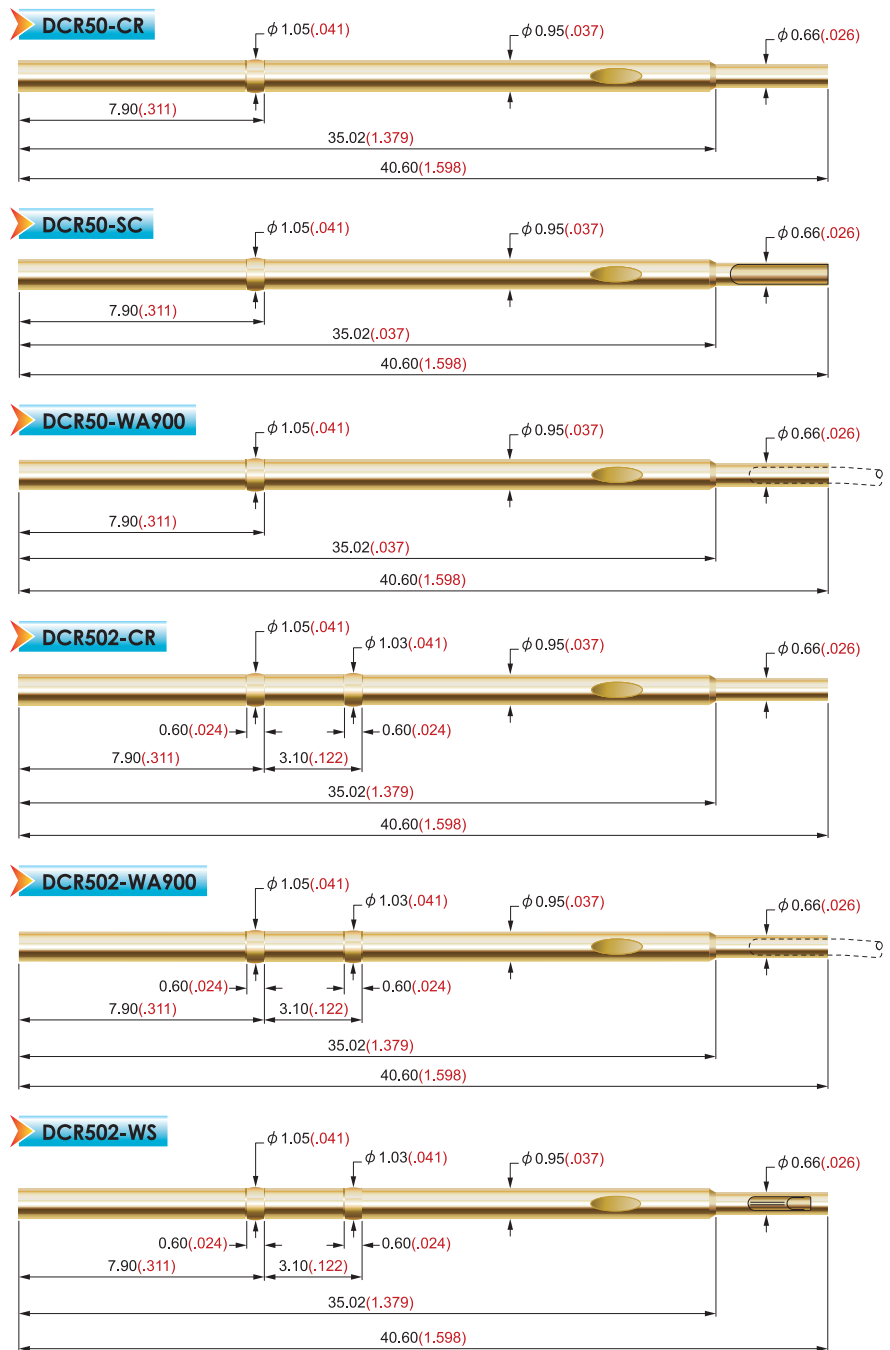

ICT 50 N / ICT 50Q

Mounting Hole Size 安装孔径
 ● 0.97/0.99 (.0381)/(.0390)

Materials 材质

Plunger 针头: BeCu or Steel, gold plated 铍铜或高碳钢, 镀金
Barrel 内管: Nickel Silver or PhBr, gold plated 白铜或磷青铜, 镀金
Spring 弹簧: Stainless steel 不锈钢线
Receptacle 套管: BeCu or PhBr, gold plated 铍铜或磷青铜, 镀金

How To Order Receptacles

>> Part Number	>> Connections	>> Description
DCR50-CR	crimp 空管	length 40.6(1.598)
DCR50-SC	solder cup 焊杯	length 40.6(1.598)
DCR50-WA900	wire pre-attached 已含线	vacuum sealed
DCR502-CR	crimp 空管	length 40.6(1.598), with double press-ring
DCR502-WA900	wire pre-attached 已含线	with double press-ring, vacuum sealed
DCR502-WS	wire strip termination 穿线端子	with double press-ring, Wire stripped.