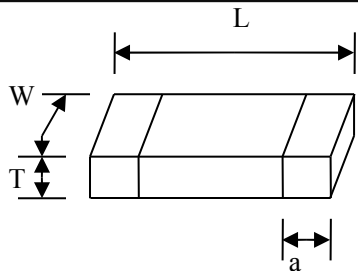


深圳市蒙泰科技有限公司

Technology Co., Ltd. Shenzhen Mongolia and Thailand

CHIP INDUCTOR TEST DATA

Lot No		Customer P/N			
Test Equipment/Fixture	HP4291B/16192A	BH P/N	MTCH1005H1N8SB		
Test Frequency	100MHz	Test condition	78%RH/24°C		
Quantity	10PCS	Test Level	-20dBm		
<p>MTCH1005 H 1N8SB</p>  <p>Packaging Style: B: Bulk, T: Tape & Reel Tolerance: J: ± 5%, K: ± 10%, M: ± 20% Inductance Material Code Dimensions Product Symbol</p>		Mechanical Dimension			
		<p>L=1.0 ± 0.15mm, W=0.5 ± 0.15mm T=0.5 ± 0.15mm, a=0.25 ± 0.1mm</p>			
Electrical Characteristic					
Spec No	L (nH)	Qmin	SRFmin(MHz)	RDCmax(Ω)	Ir(mA)
	1.8 ± 0.3nH	8	6000	0.14	400
1	1.72	8	6000	0.03	>400
2	1.83	8	6000	0.04	>400
3	1.84	8	6000	0.05	>400
4	1.82	8	6000	0.04	>400
5	1.83	8	6000	0.03	>400
6	1.78	8	6000	0.03	>400
7	1.79	8	6000	0.04	>400
8	1.82	8	6000	0.07	>400
9	1.78	8	6000	0.04	>400
10	1.77	8	6000	0.06	>400
Mean					
Range					
Remark:					
Test By/Date		Approved By/Date			

深圳市福田区华强北路华强广场 Q2A001

电话:82791372 传真:82791372