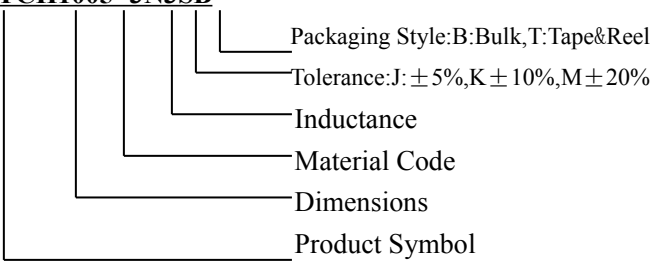
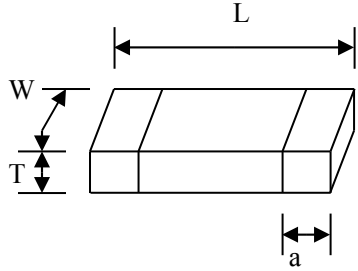


深圳市蒙泰科技有限公司

Technology Co., Ltd. Shenzhen Mongolia and Thailand

CHIP INDUCTOR TEST DATA

Lot No		Customer P/N	
Test Equipment/Fixture	HP4291B/16192A	BH P/N	MTCH1005-3N3SB
Test Frequency	100MHz	Test condition	78%RH/24°C
Quantity	10PCS	Test Level	-20dBm
<p>MTCH1005- 3N3SB</p>  <p>Packaging Style: B: Bulk, T: Tape & Reel Tolerance: J: ±5%, K: ±10%, M: ±20% Inductance Material Code Dimensions Product Symbol</p>		Mechanical Dimension	
		 <p>L=1.0 ± 0.15mm, W=0.5 ± 0.15mm T=0.5 ± 0.15mm, a=0.25 ± 0.1mm</p>	
Electrical Characteristic			
Spec No	L (nH)	Qmin	SRFmin(MHz)
	3.3 ± 0.3	8	5500
1	3.33	8	5500
2	3.41	8	5500
3	3.25	8	5500
4	3.32	8	5500
5	3.28	8	5500
6	3.24	8	5500
7	3.17	8	5500
8	3.31	8	5500
9	3.21	8	5500
10	3.48	8	5500
Mean			
Range			
Remark:			
Test By/Date		Approved By/Date	

深圳市福田区华强北路华强广场 Q2A001
电话:82791372 传真:82791372