

# 管状保险丝

## GBM/GBP



5ØX20mm

### 快断陶瓷管保险丝



#### 安全认证:

GBM	
UL Listed	10mA ~ 15A
CSA Certified	10mA ~ 12A
CSA Acceptance	12.1A ~ 15A
PSE	1A ~ 15A
GBP (With Pig-Tail)	
UL Listed	10mA ~ 15A
CSA Certified	10mA ~ 12A
CSA Acceptance	12.1A ~ 15A
PSE	1A ~ 15A

#### 电气特性:

额定电流	100%	135%	2000%
	MIN	MAX	MAX
10mA~20A	4 Hrs.	1 hr	30 Sec

#### 分断能力:

10mA ~ 15A:	10,000 amperes at 125V AC
10mA ~ 1A:	35 amperes at 250V AC
1.25A ~ 3.5A:	100 amperes at 250V AC
3.75A ~ 10A:	200 amperes at 250V AC
10.1A ~ 15A:	750 amperes at 250V AC

#### 工作环境温度:

-55°C to + 125°C



#### 材料:

Ceramic body / Nickel Plated Brass Caps  
Lead Wire:  
Diameter Ø0.8 mm 14A and less.  
Diameter Ø1.0 mm for rating above 15A to 19A.  
Diameter Ø1.2mm for rating above 20A.

#### 包装:

- In Bulk:  
GBM-1,000 pcs ; GBP-500 pcs per box
- On Axial Tape & Reel  
1,000pcs per reel.
- Tape & Reel specification:  
per EIA-296-E& IEC 286-1  
@10mm Pitch and 56.5mm inside Tape Spacing.

#### 机械尺寸:

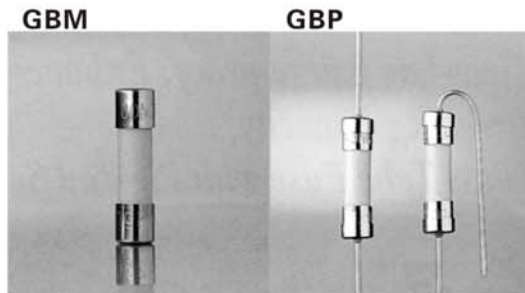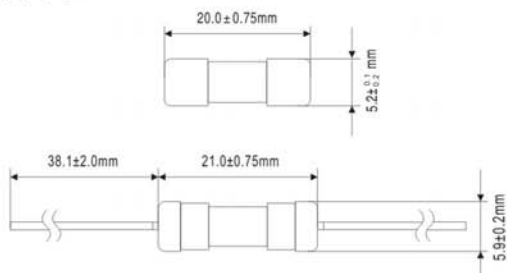

产品料号	带引线料号	额定电流 [In]	额定电压 (V)	公称冷电阻 (Ω)	公称熔化热能 A²·Sec
GBM.030	GBP.030	30 mA	250V or less	*	*
GBM.032	GBP.032	32mA(1/32A)		*	*
GBM.040	GBP.040	40 mA		*	*
GBM.050	GBP.050	50 mA		*	*
GBM.063	GBP.063	63 mA		*	*
GBM.070	GBP.070	70 mA		*	*
GBM.080	GBP.080	80 mA		*	*
GBM.100	GBP.100	100 mA		9.0860	0.0018
GBM.125	GBP.125	125 mA		7.7250	0.0035
GBM.150	GBP.150	150 mA		6.4810	0.0048
GBM.200	GBP.200	200 mA		4.0750	0.0085
GBM.250	GBP.250	250 mA		2.1170	0.0142
GBM.300	GBP.300	300 mA		2.3850	0.0197
GBM.315	GBP.315	315 mA		0.8090	0.0218
GBM.350	GBP.350	350 mA		0.7350	0.0375
GBM.400	GBP.400	400 mA		0.6030	0.0561
GBM.500	GBP.500	500 mA		0.3970	0.0930
GBM.600	GBP.600	600 mA		0.2930	0.1300
GBM.630	GBP.630	630 mA		0.2900	0.1510
GBM.700	GBP.700	700 mA		0.2190	0.2050
GBM.750	GBP.750	750 mA	0.2370	0.2850	
GBM.800	GBP.800	800 mA	0.1880	0.3000	
GBM.001	GBP.001	1A	0.1700	0.4000	
GBM.1.50	GBP.1.50	1.5A	0.0620	1.1250	
GBM.002	GBP.002	2A	0.0580	2.0000	
GBM.2.50	GBP.2.50	2.5A	0.0532	6.2500	
GBM.003	GBP.003	3A	0.0460	9.0000	
GBM.3.15	GBP.3.15	3.15A	0.0410	9.9220	
GBM.3.50	GBP.3.50	3.5A	0.0355	12.250	
GBM.004	GBP.004	4A	0.0260	16.0000	
GBM.005	GBP.005	5A	0.0223	25.0000	
GBM.006	GBP.006	6A	0.0205	54.0000	
GBM.6.30	GBP.6.30	6.3A	0.0169	63.375	
GBM.007	GBP.007	7A	0.0117	73.5000	
GBM.008	GBP.008	8A	0.0102	128.0000	
GBM.010	GBP.010	10A	0.0075	250.0000	
GBM.012	GBP.012	12A	0.0061	360.0000	
GBM.015	GBP.015	15A	0.0046	675.0000	
GBM.020	GBP.020	20A	0.0035	1200.0	

