确认此型号所有图纸 签字确认：

GENERAL TOLERANCE:±0.2

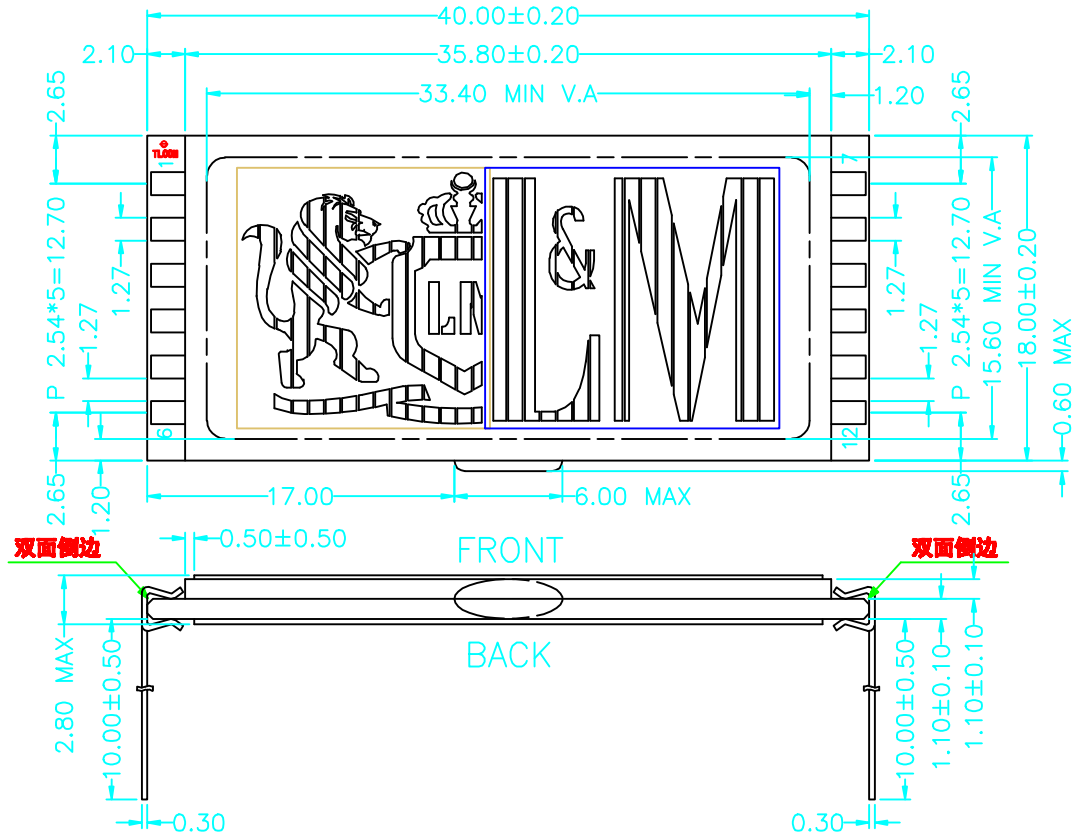

SPECIFICATIONS

FRONT POLARIZER : TRANSMISSIVE
BACK POLARIZER : TRANSMISSIVE
STORAGE TEMP : −10°C TO +60°C
OPERATING TEMP : 0°C TO +50°C
VIEWING DIRECTION : 12 O'CLOCK
DRIVE CONDITION : 1/4D 1/3B, 3.0V
DISPLAY MODE : TN, NEGATIVE MODE
CONNECTOR: PIN
CUSTOMER P/N : 509110H

SHEET: 1 OF 4		松本国际股份有限公司 SOOBOO INTERNATIONAL CO.,LTD		
GENERAL TOL: ±0.20 MM	UNITS MM			
CUS NO:		MODULE NUMBER: SRX0261−TP0		TEL:0755−33503277
DRAW BY:	ZXM			FAX:0755−29161639
CHK BY:	LIQIN			
APP BY:	198	DO NOT SCALE THIS DRAWING.	PROJECTION	DATE: 13−AUG−2011