


H=1.4mm Slide Switches SSQ Series

Switches

FEATURES


1. 1.4mm in height.
2. Suitable for SMT reflow soldering.
3. Packaged in a tape (taping package) to allow the auto mounting of switches.
4. Changeover timing cannot be specified.
5. With/Without Earth terminal and With/Without click feeling are available.

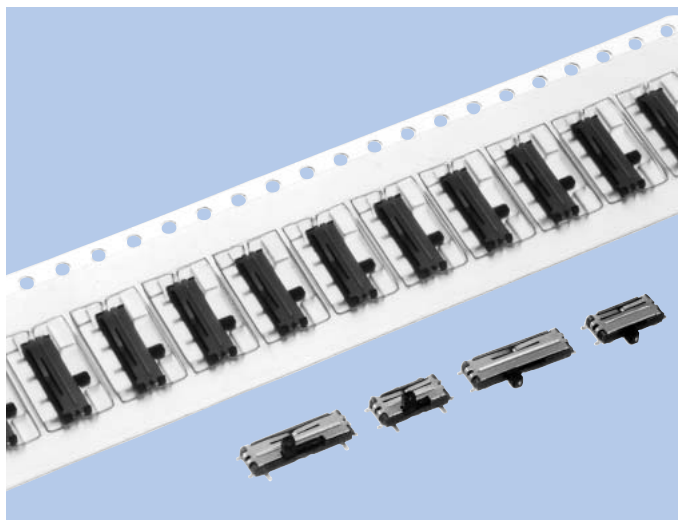

APPLICATIONS

1. For portable audios, radios, LCD TVs, video cameras, etc.
2. For protecting overwrite of memory cards.
3. For presetting switch.

MODEL NAME CODE

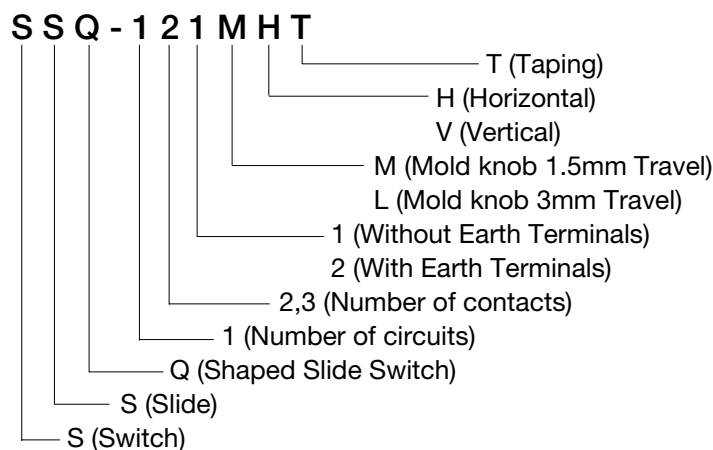


SPECIFICATIONS

Electrical Characteristics	Rating	0.3A, 4V DC
	Contact Resistance	70mΩ or less
	Insulation Resistance	100MΩ or more
	Withstand Voltage	1 minute at 100V AC
Mechanical Characteristics	Operating Force	2-contacts type 1.47±0.98N
		3-contacts type a→b/c→b 1.47±0.98N b→a/b→c 1.96±0.98N
Life		10,000cycles

TYPE


Model Name Code	Order Number	No. of Poles	No. of Contacts	Travel (mm)	Knob Direction	Terminal Earth	Pcs/Reel
SSQ-122MHT	R66 6588	1	2	1.5	Horizontal	With	4,000
SSQ-121MHT	R66 6658	1	2	1.5	Horizontal	Without	4,000
SSQ-122MVT	R66 6624	1	2	1.5	Vertical	With	2,500
SSQ-121MVT	R66 6671	1	2	1.5	Vertical	Without	2,500
SSQ-122LHT	R66 6647	1	2	3	Horizontal	With	4,000
SSQ-121LHT	R66 6672	1	2	3	Horizontal	Without	4,000
SSQ-132MHT	R66 6609	1	3	1.5	Horizontal	With	4,000
SSQ-131MHT	R66 6673	1	3	1.5	Horizontal	Without	4,000
SSQ-132MVT	R66 6639	1	3	1.5	Vertical	With	2,500
SSQ-131MVT	R66 6674	1	3	1.5	Vertical	Without	2,500

DIMENSIONS

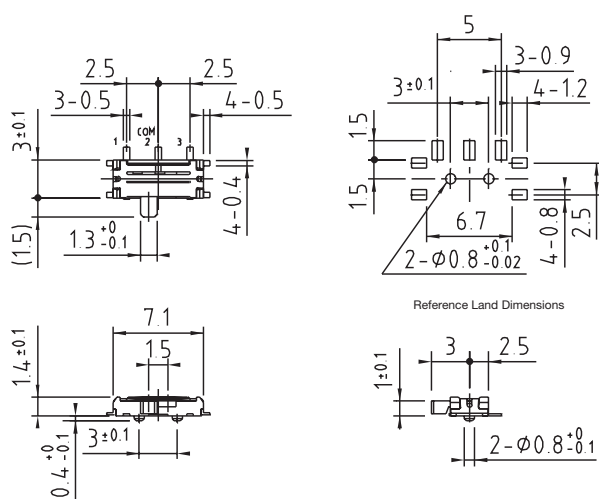


SSQ-122MHT (1-pole, 2-contacts : Horizontal)

Unit : mm

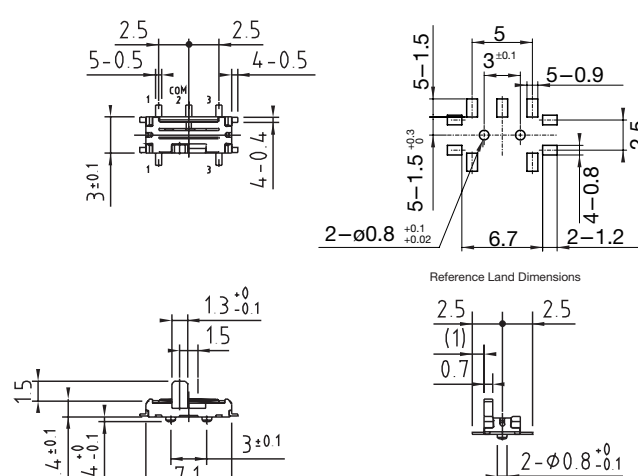


SSQ-122MVT (1-pole, 2-contacts : Vertical)

Unit : mm

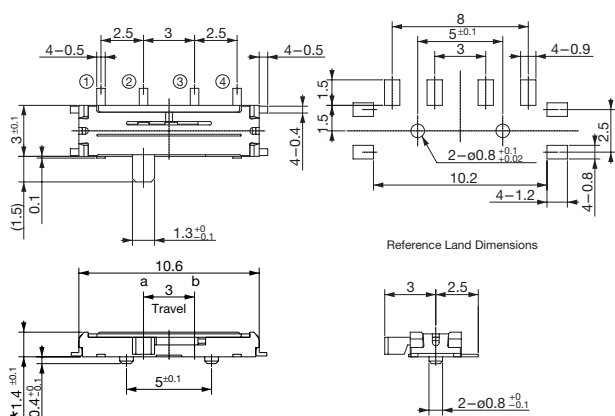

SSQ-122LHT (1-pole, 2-contact : 3mm travel)

Unit : mm

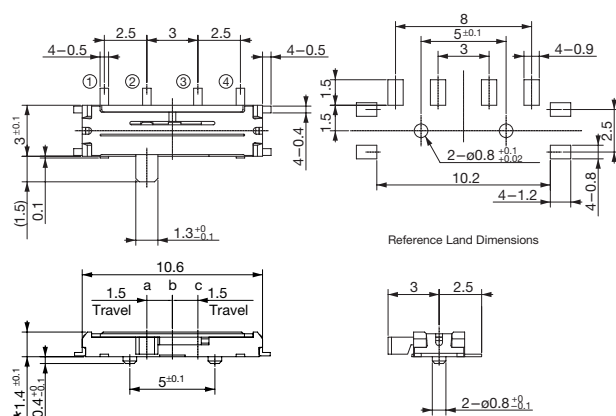

SSQ-132MHT (1-pole, 3-contacts : Horizontal)

Unit : mm