

## • CORE



### 1) E & I Core

This E & I core has a high permeability and a low coercive force as well as low hysteresis loss through high temperature heating treatment. EI, EE, E types are available.

→What is this used for?

- Transformer
- Telephone Exchange
- Telephone
- Fax
- Magnetic Card Reader
- Printer
- Microphone



### 2) Z. C. T & C. T Core

Ring Core and Tape Wound Core are used for Sensor Core of various Electric Leakage Detection and Current Transformers.

→What is this used for ?

- AFCI
- GFCI
- ELCB
- Electronic Energy Meter
- Precision Power Meter
- Bidet



### 3) Shield Case







Shield Case protects Electromagnetic wave jamming operation of electronic products.

→What is this used for ?

- Magnetic Shielding shield
- Magnetic Head Case
- Automobile dashboard Shield Case
- Display CRT Shield
- Sound Instruments Shield



# DIMENSION LIST OF LAMINATION CORES

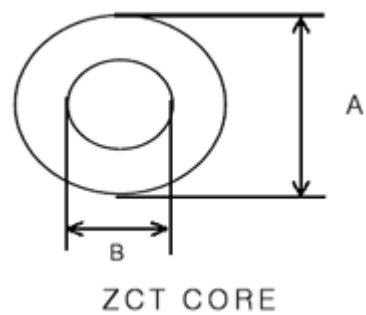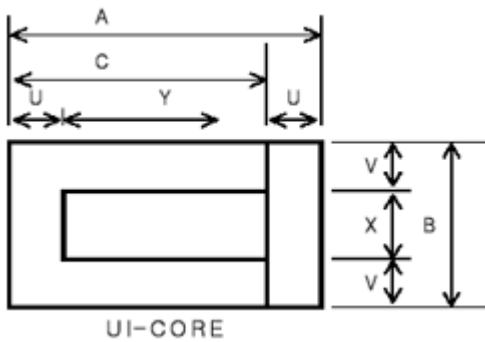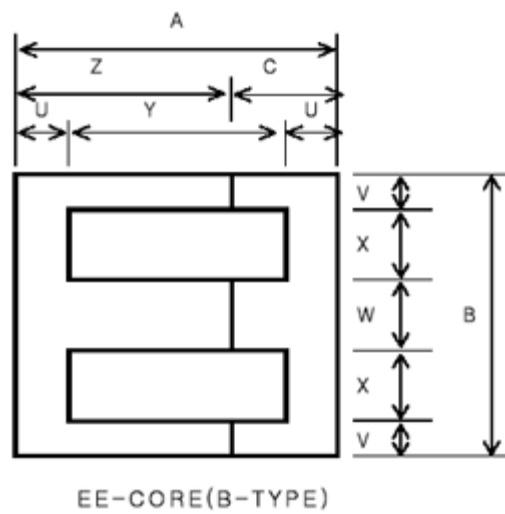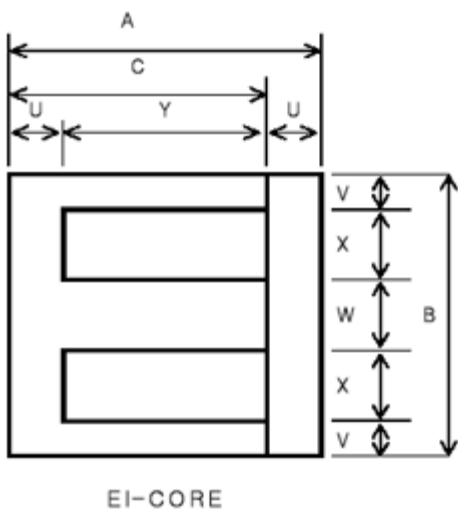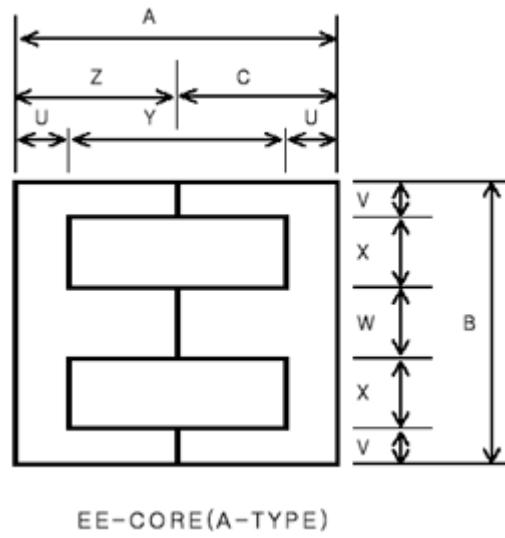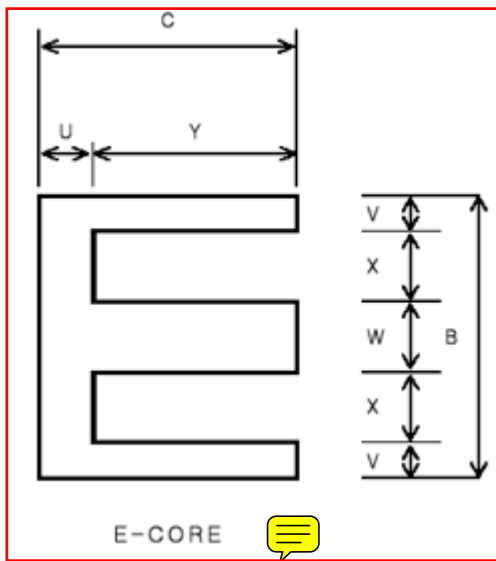

## DIMENSION LIST OF LAMINATION CORES

TYPE	A	B	C	U	V	W	X	Y	Z	
ED-8(8X11)	-	8	11.00	2.7	1.2	2.4	1.6	8.3	-	
ED-8LE(8.1X13.65)	-	8.1	13.65	2.75	1.405	2.45	1.42	10.9	-	
ED-8(8X13.6)	-	8	13.6	2.8	1.2	2.5	1.55	10.8	-	
ED-8(8.26X13.59)	-	8.26	13.59	2.72	1.33	2.4	1.6	10.87	-	
ED-8LE(8X14)	-	8	14	2.7	1.2	2.4	1.6	11.3	-	
ED-8LE(8X16)	-	8	16	2.7	1.2	2.4	1.6	13.3	-	
EE3031EL	-	9.525	9.525	1.19	1.19	2.385	2.38	8.335	-	
10-9.5LE	-	10	9.5	2.0	1.35	2.5	2.4	7.5	-	
ED-12.6	-	12.6	17	4.1	1.9	3.8	2.5	12.9	-	
12.7LE	-	12.72	11.11	1.58	1.59	3.18	3.18	9.53	-	
13.5LE	-	13.5	16	2.4	2.2	4.8	2.15	13.6	-	
ED-16	-	16	21	4.9	2.4	4.8	3.2	16.1	-	
ED-20	-	20	26	6	.3	6	4	20	-	
ED-25	-	25	33	7.8	3.8	7.6	4.9	25.2	-	
14EI	10.5	14	8.75	1.75	1.75	3.5	3.5	7	-	
14LE	-	14	10.5	1.75	1.75	3.5	3.5	8.75	-	
14-12E	-	14	12	2.5	1.75	3.5	3.5	9.5	-	
15.2E	-	15.24	10.795	1.905	1.905	3.81	3.81	8.89	-	
16EI	14	16	12	2	2	4	4	10	-	
16LE	-	16	14	2	2	4	4	12	-	
16LE(LOSS TYPE)	-	16	16	2.4	2.4	4.8	3.2	13.6	-	
16UI	18.1	16.6	15.3	2.8	2.8	-	11	12.5	-	
16-11E	-	16	11	2.4	2.4	4.8	3.2	8.6	-	
188EE	-	18.8	7.7	2.35	2.35	4.7	4.7	5.35	-	
19EE(18.8)	42	18.8	21	5.2	3.3	6.8	2.7	31.6	21	
19EI	15	19	12.5	2.5	2.375	4.75	4.75	10	-	
19LE	-	19	15	2.5	2.375	4.75	4.75	12.5	-	
185LE	-	19.05	13.49	2.38	2.38	4.76	4.76	11.11	-	
185LE(GAP)	-	19.05	13.49	2.38	2.38	4.76	4.76	11.11	-	
186EI	11.15	19.08	8.75	2.4	2.385	4.77	4.77	6.35	-	
186LE	-	19.04	11.13	2.4	2.38	4.76	4.76	8.73	-	
187EI	15391	19.08	13.51	2.4	2.385	4.77	4.77	11.11	-	
187LE	-	19.08	15.9	2.4	2.385	4.77	4.77	13.5	-	
19.51LE	-	19.51	14.7	3.7	3	4.5	4.505	11	-	
20EE	ATYPE	20.2	20	10.1	3.0	3.0	6.0	4.0	14.2	10.1
	BTYPE	20	20	6	3	3	6	4	14	14

22EE	24	22	12	3	3	6	5	18	12
22LE	28	22	14	3	3	6	5	22	14
24EI	18	24	15	3	3	6	6	12	-
24LE	-	24	18	3	3	6	6	15	-
25.4E	-	25.4	12.7	3.18	3.175	6.35	6.35	9.525	-
24-25LE	-	25.4	19.05	3.175	3.175	6.35	6.35	15.875	-
24-25EE	19.05	25.4	6.35	3.175	3.175	6.35	6.35	12.7	12.7
24-25EE(GAP)	19.05	25.4	6.35	3.175	3.175	6.35	6.35	12.7	12.7
26-27EE	27.01	31.75	9.45	4.77	4.76	9.53	6.35	17.47	17.47
27EE(GAP)	-	31.75	17.45	4.75	4.75	9.55	6.35	12.7	-
28EI	25	28	21.5	3.5	3.5	7	7	18	-
32EE	32.24	31.97	16.12	4.65	4.75	9.47	6.5	22.94	16.12
375EI	28.55	34.93	23.8	4.75	4.78	9.53	7.92	19.05	-
35EI	29.5	35	24.5	5	5	9.6	7.7	19.5	-
41EI	33	41	27	6	6	13	8	21	-
46.83EI	38.1	46.83	31.75	6.35	6.35	11.11	11.51	25.4	-
ZCT 12.2	12.2	8.8	-	-	-	-	-	-	-
ZCT 13.0	13	9.3	-	-	-	-	-	-	-
ZCT 13.5	13.35	9.85	-	-	-	-	-	-	-
ZCT 15	15	11	-	-	-	-	-	-	-
ZCT 17.8	17.8	13.35	-	-	-	-	-	-	-
TAPE	-	-	-	-	-	-	-	-	-

E-mail: [gol t@qq.com](mailto:gol t@qq.com) QQ: 414382607 Mob: 13560792090 Sales: 高岗