
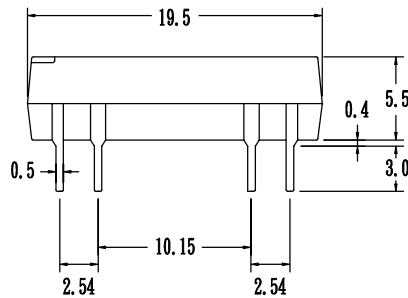



PRODUCT SPECIFICATION


<p>COSMO ELECTRONICS CORPORATION</p>	<p>REED RELAY: D1C050000</p>	<p>SHEET 1 OF 2</p>
---	---	---------------------

1. OUTSIDE DIMENSION : UNIT (mm)

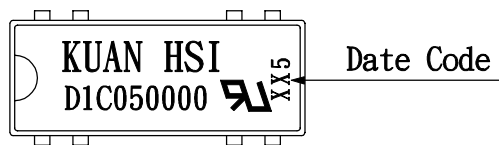

TOLERANCE : $\pm 0.1\text{mm}$

2. SCHEMATIC : TOP VIEW



PRODUCT SPECIFICATION

COSMO ELECTRONICS CORPORATION	REED RELAY: D1C050000	SHEET 2 OF 2
---	---------------------------------	--------------

3.0 COIL RATINGS: (AT 20°C)

3.1	Coil resistance	200	Ω	(±10%)
3.2	Nominal coil current	5	VDC	
3.3	Maximum Continuous voltage	10	VDC	
3.4	Must operate	3.75	VDC	
3.5	Must release	1.0	VDC	
3.6	Rated current	25	mA	

4.0 ELECTRONICAL CHARACTERISTICS:

4.1	Contact resistance	150	mΩ	(max)
4.2	Operate time	1.0	ms	(max)
4.3	Bounce time	2.0	ms	(max)
4.4	Release time	1.0	ms	(max)
4.5	Insulation resistance	10 ⁹	Ω	(min) (100 VDC open contact)
4.6	Power	3	VA	(max)
4.7	Switching voltage	100	VDC	(max)
4.8	Switching current	0.25	A	(max)
4.9	Carry current	0.5	A	(max)
4.10	Breakdown voltage	200	VDC	(min) (across open contact)
		500	VDC	(min) (between coil & contact)
4.11	Life expectancy	5*10 ⁷		(signal level)
4.12	Operating temp	-40 to 85	°C	
4.13	Storage temp	-50 to 125	°C	
4.14	Resonant frequency	3.5	KHZ	
4.15	Vibration (10-2000HZ)	20	g	(max)
4.16	Minimum permissible load	100	mVDC	10uA