

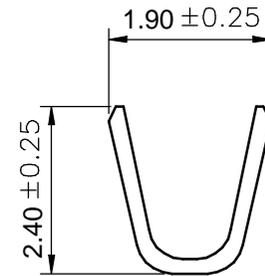
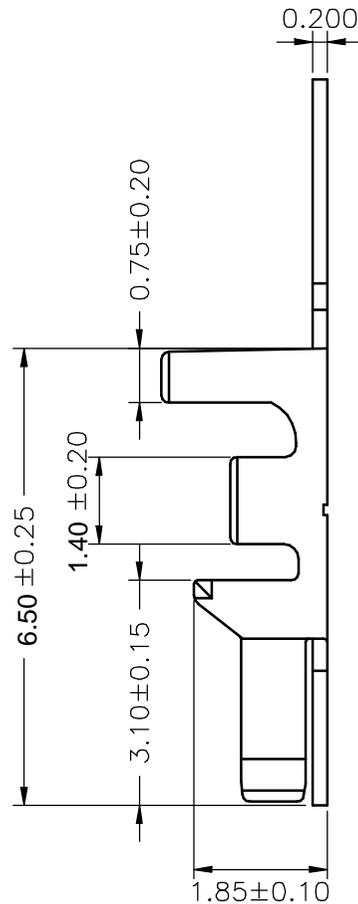



REV	DATE	DESCRIPTION	REVISOR
1.0			

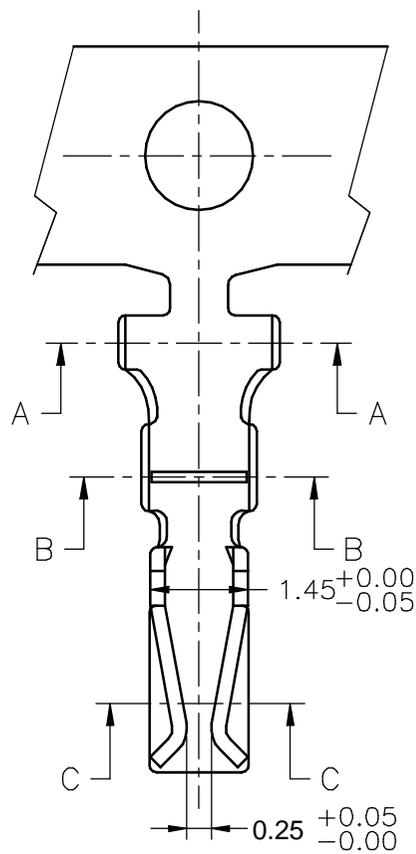

SEC:A-A



SEC:B-B



SEC:C-C

**CJT**® CHANGJIANG CONNECTORS CO., LTD.  
CHANGJIANG CONNECTORS

Ordering information & Specifications

Unit:mm

Part No	Wire Range	Insultion O.D.	Material	Finish	Qty/reel
A2008-TP	AWG# 22-#30	1.45mm(max)	Phosphor Bronze	Tin-plated	10,000 pcs

Note:e-stamping before Tin-plated

### Specification

Client:		Drawing No: A2008-T	
Tolerance	Draw By: LIZhiQiang	Date: 2008-05-15	Unit:mm Scale:Enone
X. $X \leq 0.25$	Checked: HE.	Date: 2008-05-15	
X. $XX \leq 0.15$	Approved:	Date:	
X. $XXX \leq 0.10$	Material:	Edition: A	





REV	DATE	DESCRIPTION	REVISOR
1.0			

**SPECIFICATIONS**

Current Rating: 3A AC,DC  
Voltage Rating: 250V AC,DC  
Temperature Range: -25°C ~ +85°C  
Contact Resistance: 30mΩ Max  
Insulation Resistance: 1000MΩ Min  
Withstanding Voltage: 1000V AC/minute  
Material: Nylon 66,UL94V-0  
Color: Natural(White)

**Ordering Information & Dimensions**

PART NO.	Dimensions	
	A	B
A2008H-2P	2.00	4.60
A2008H-3P	4.00	6.60
A2008H-4P	6.00	8.60
A2008H-5P	8.00	10.60
A2008H-6P	10.00	12.60
A2008H-7P	12.00	14.60
A2008H-8P	14.00	16.60
A2008H-9P	16.00	18.60
A2008H-10P	18.00	20.60
A2008H-11P	20.00	22.60
A2008H-12P	22.00	24.60
A2008H-13P	24.00	26.60
A2008H-14P	26.00	28.60
A2008H-15P	28.00	30.60
A2008H-16P	30.00	32.60

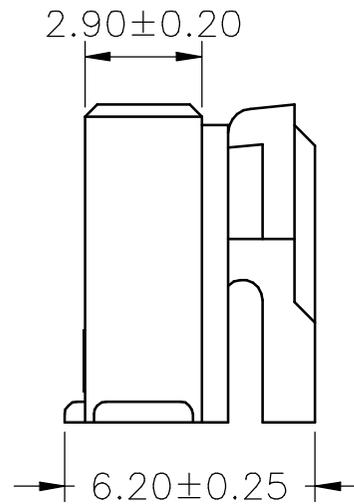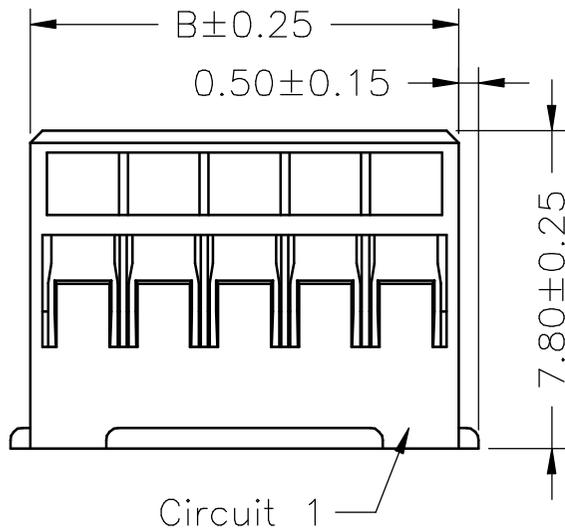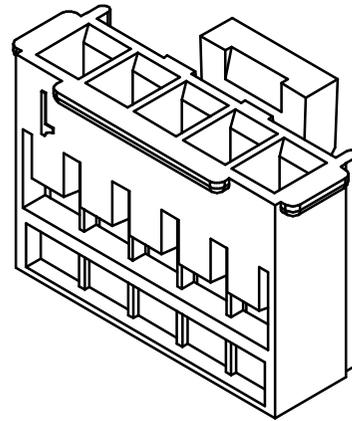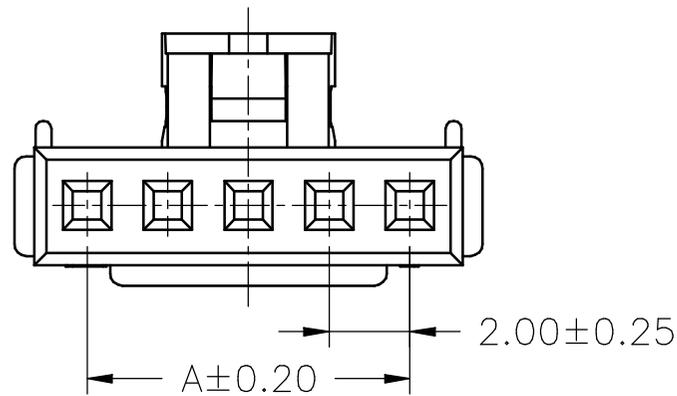



**CJT**® CHANGJIANG CONNECTORS CO., LTD.  
CHANGJIANG CONNECTORS

**Specification**

Client:		Drawing No: A2008H-NP	
Tolerance	Draw By: LIZhiQiang	Date: 2008-05-15	Unit:mm Scale:Enone
X. X ≤ 0.25	Checked: HE.	Date: 2008-05-15	
X. XX ≤ 0.15	Approved:	Date:	
X. XXX ≤ 0.10	Material:	Edition: A	

REV	DATE	DESCRIPTION	REVISOR
1.0			

**SPECIFICATIONS**  
 Current Rating: 3A AC,DC  
 Voltage Rating: 250V AC,DC  
 Temperature Range: -25°C ~ +85°C  
 Contact Resistance: 30mΩ Max  
 Insulation Resistance: 1000MΩ Min  
 Withstanding Voltage: 1000V AC/minute  
 Pin Material: Brass/Tin-plated  
 Material: Nylon 66,UL94V-0  
 Color: Natural(White)

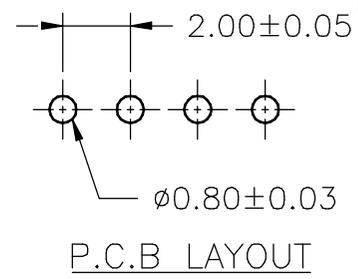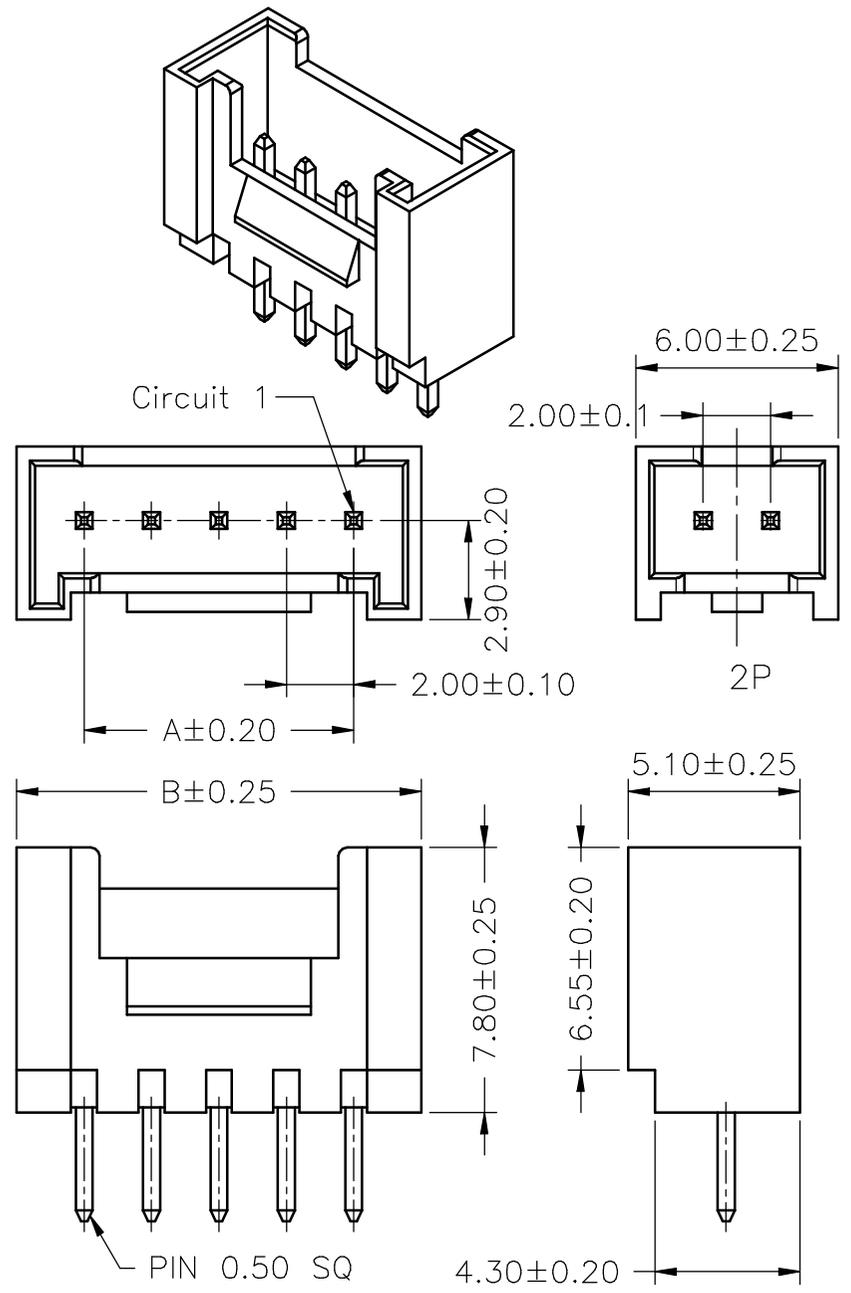

**Ordering Information & Dimensions**

PART NO.	Dimensions	
	A	B
A2008WV-2P	2.00	6.00
A2008WV-3P	4.00	8.00
A2008WV-4P	6.00	10.00
A2008WV-5P	8.00	12.00
A2008WV-6P	10.00	14.00
A2008WV-7P	12.00	16.00
A2008WV-8P	14.00	18.00
A2008WV-9P	16.00	20.00
A2008WV-10P	18.00	22.00
A2008WV-11P	20.00	24.00
A2008WV-12P	22.00	26.00
A2008WV-13P	24.00	28.00
A2008WV-14P	26.00	30.00
A2008WV-15P	28.00	32.00
A2008WV-16P	30.00	34.00







**Specification**

Client:		Drawing No: A2008WV-NP	
Tolerance	Draw By: LIZhiQiang	Date: 2008-05-15	Unit:mm Scale:Enone
X. X ≤ 0.25	Checked: HE.	Date: 2008-05-15	
X. XX ≤ 0.15	Approved:	Date:	
X. XXX ≤ 0.10	Material:	Edition: A	

REV	DATE	DESCRIPTION	REVISOR
1.0			

**SPECIFICATIONS**

Current Rating: 3A AC,DC  
Voltage Rating: 250V AC,DC  
Temperature Range: -25°C ~ +85°C  
Contact Resistance: 30mΩ Max  
Insulation Resistance: 1000MΩ Min  
Withstanding Voltage: 1000V AC/minute  
Pin Material: Brass/Tin-plated  
Material: Nylon 66,UL94V-0  
Color: Natural(White)

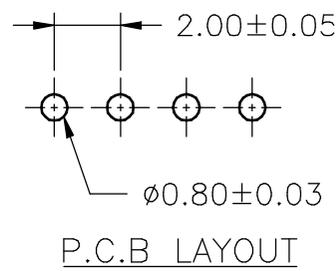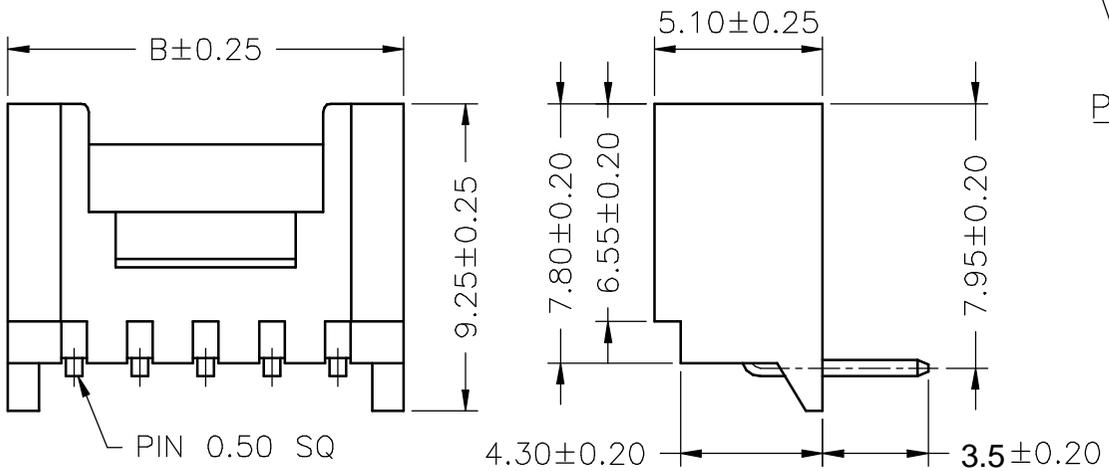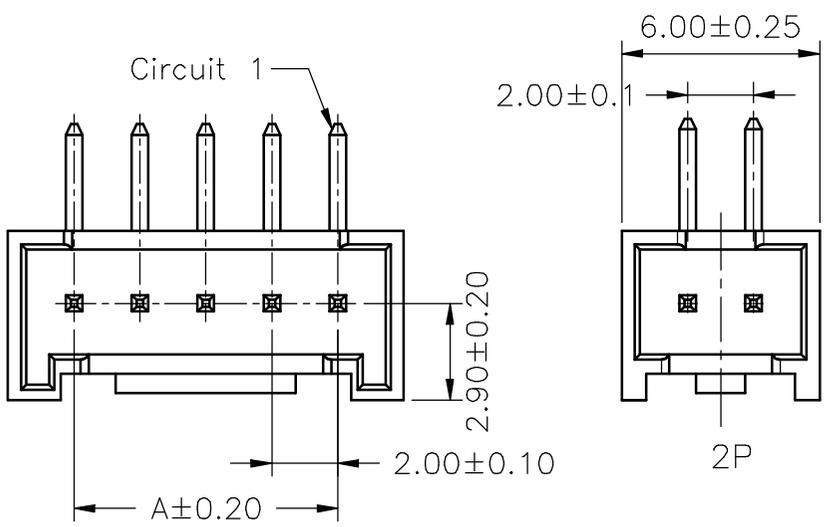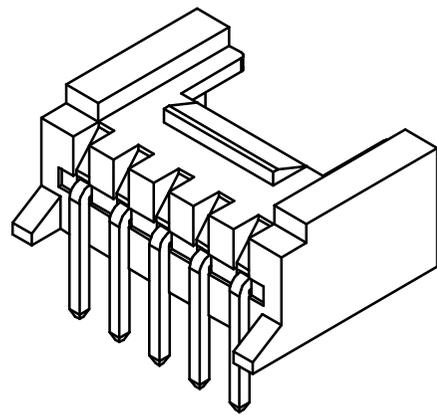

**Ordering Information & Dimensions**

PART NO.	Dimensions	
	A	B
A2008WR-2P	2.00	6.00
A2008WR-3P	4.00	8.00
A2008WR-4P	6.00	10.00
A2008WR-5P	8.00	12.00
A2008WR-6P	10.00	14.00
A2008WR-7P	12.00	16.00
A2008WR-8P	14.00	18.00
A2008WR-9P	16.00	20.00
A2008WR-10P	18.00	22.00
A2008WR-11P	20.00	24.00
A2008WR-12P	22.00	26.00
A2008WR-13P	24.00	28.00
A2008WR-14P	26.00	30.00
A2008WR-15P	28.00	32.00
A2008WR-16P	30.00	34.00



**Specification**

Client:		Drawing No: A2008WR-NP	
Tolerance	Draw By: LIZhiQiang	Date: 2008-05-15	Unit:mm Scale:Enone
X. X ≤ 0.25	Checked: HE.	Date: 2008-05-15	
X. XX ≤ 0.15	Approved:	Date:	
X. XXX ≤ 0.10	Material:	Edition: A	