





REV	DATE	DESCRIPTON	REVISOR
1.0			

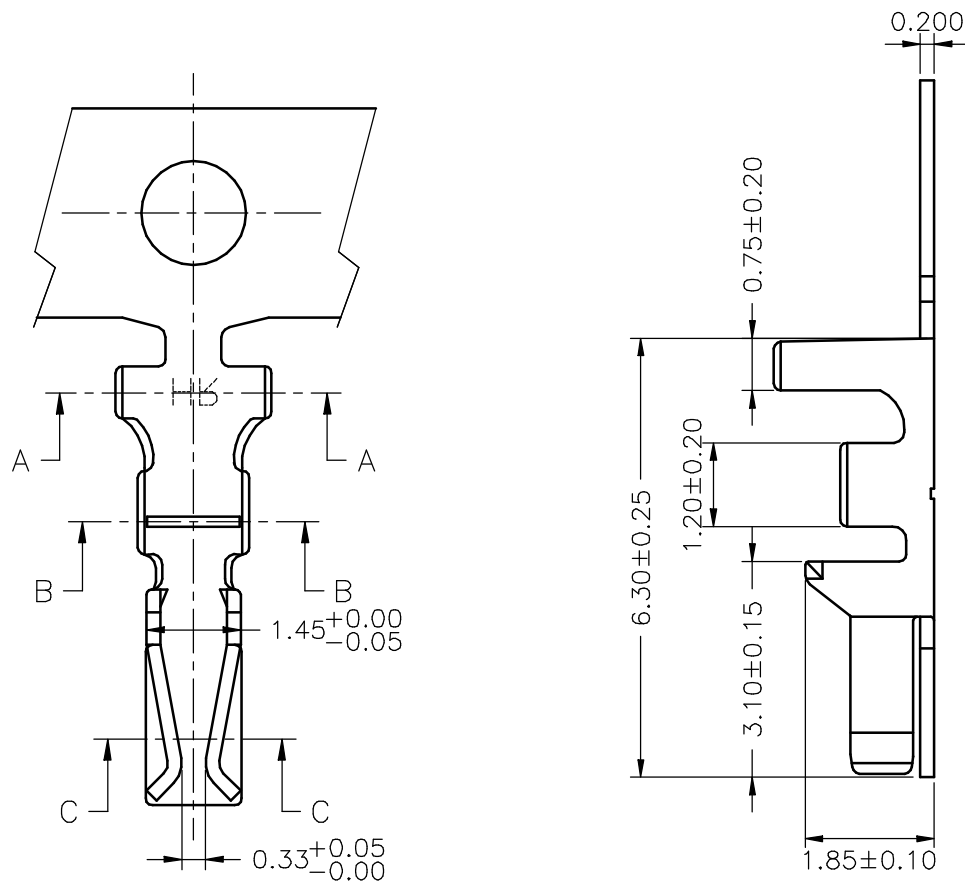


SEC:A-A



SEC:B-B



SEC:C-C



Ordering information & Specifications

Unit:mm

Part No	Wire Range	Insultion O.D.	Material	Finish	Qty/reel
A2009-TP	AWG# 22-#30	1.45mm(max)	Phosphor Bronze	Tin-plated	10,000 pcs

Note:e-stamping before Tin-plated

Specification

Client:		Drawing No: A2009-T	
Tolerance	Draw By: LIZhiQiang	Date: 2008-05-15	Unit:mm Scale:Enone
X. $X \leq 0.25$	Checked: HE.	Date: 2008-05-15	
X. $XX \leq 0.15$	Approved:	Date:	
X. $XXX \leq 0.10$	Material:	Edition: A	

Specifications

Current rating: 2A AC,DC

Voltage rating: 250V AC,DC

Temperature range: -25°C ~ +85°C

Contact resistance: 30mΩ Max.

Insulation resistance: 1000MΩ Min.

Withstanding voltage: 800V AC/minute

Material: Nylon66 UL94V-0

REV	DATE	DESCRIPTION	REVISER
1.0			


Ordering Information & Dimensions:





PART NO.	Dimensions	
	A	B
A2009H-2×2P	2.00	6.00
A2009H-2×3P	4.00	8.00
A2009H-2×4P	6.00	10.00
A2009H-2×5P	8.00	12.00
A2009H-2×6P	10.00	14.00
A2009H-2×7P	12.00	16.00
A2009H-2×8P	14.00	18.00
A2009H-2×9P	16.00	20.00
A2009H-2×10P	18.00	22.00
A2009H-2×11P	20.00	24.00
A2009H-2×12P	22.00	26.00
A2009H-2×13P	24.00	28.00
A2009H-2×14P	26.00	30.00
A2009H-2×15P	28.00	32.00
A2009H-2×16P	30.00	34.00
A2009H-2×17P	32.00	36.00
A2009H-2×18P	34.00	38.00
A2009H-2×19P	36.00	40.00
A2009H-2×20P	38.00	42.00


Unit:mm

CJT[®] CHANGJIANG CONNECTORS CO., LTD.
CHANGJIANG CONNECTORS

Specification

Client:		Drawing No: A2009H-2XNP	
Tolerance	Draw By: LIZhiQiang	Date: 2008-05-15	Unit:mm Scale:Enone
X. X≤0.25	Checked: HE.	Date: 2008-05-15	
X. XX≤0.15	Approved:	Date:	
X. XXX≤0.10	Material:	Edition: A	

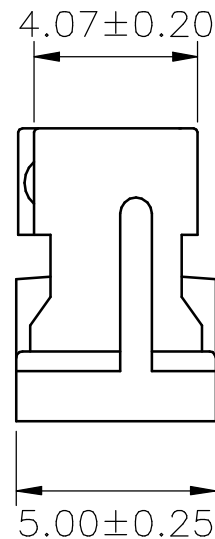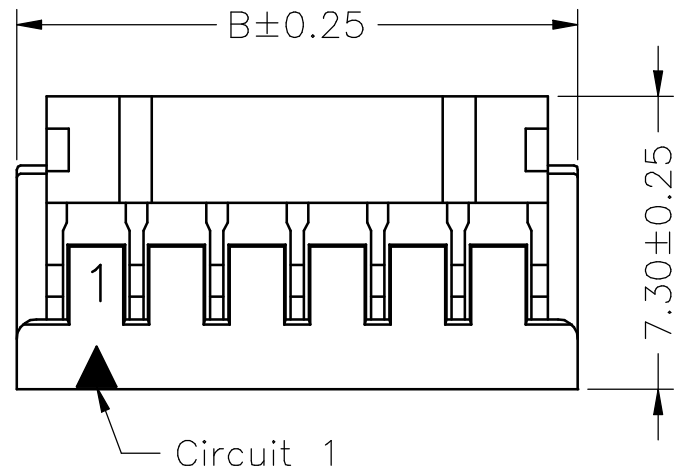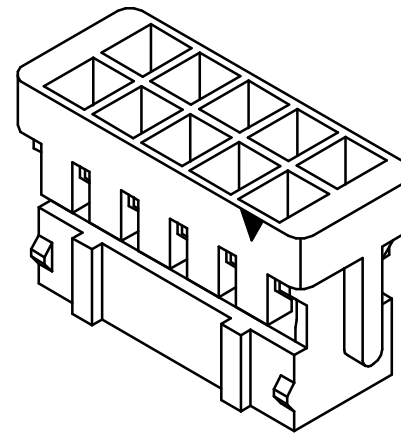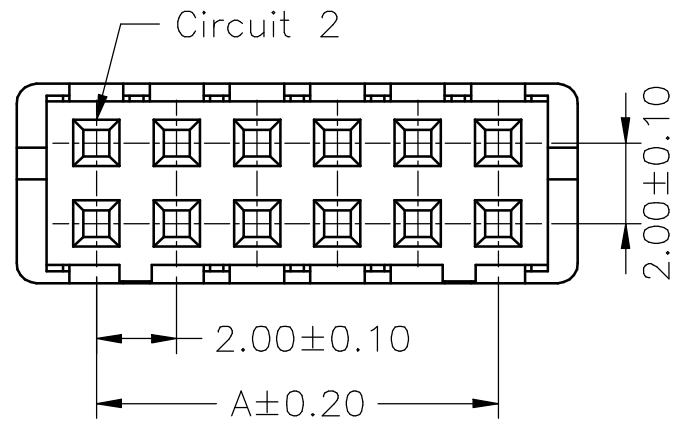



Specifications

Current rating: 2A AC,DC

Voltage rating: 250V AC,DC

Temperature range: -25°C ~ +85°C

Contact resistance: 30mΩ Max.

Insulation resistance: 1000MΩ Min.

Withstanding voltage: 800V AC/minute


Material: Nylon66 UL94V-0

REV	DATE	DESCRIPTTON	REVISER
1.0			


Ordering Information & Dimensions:

PART NO.	Dimensions	
	A	B
A2009WV-2×2P	2.00	6.00
A2009WV-2×3P	4.00	8.00
A2009WV-2×4P	6.00	10.00
A2009WV-2×5P	8.00	12.00
A2009WV-2×6P	10.00	14.00
A2009WV-2×7P	12.00	16.00
A2009WV-2×8P	14.00	18.00
A2009WV-2×9P	16.00	20.00
A2009WV-2×10P	18.00	22.00
A2009WV-2×11P	20.00	24.00
A2009WV-2×12P	22.00	26.00
A2009WV-2×13P	24.00	28.00
A2009WV-2×14P	26.00	30.00
A2009WV-2×15P	28.00	32.00
A2009WV-2×16P	30.00	34.00
A2009WV-2×17P	32.00	36.00
A2009WV-2×18P	34.00	38.00
A2009WV-2×19P	36.00	40.00
A2009WV-2×20P	38.00	42.00

Unit:mm

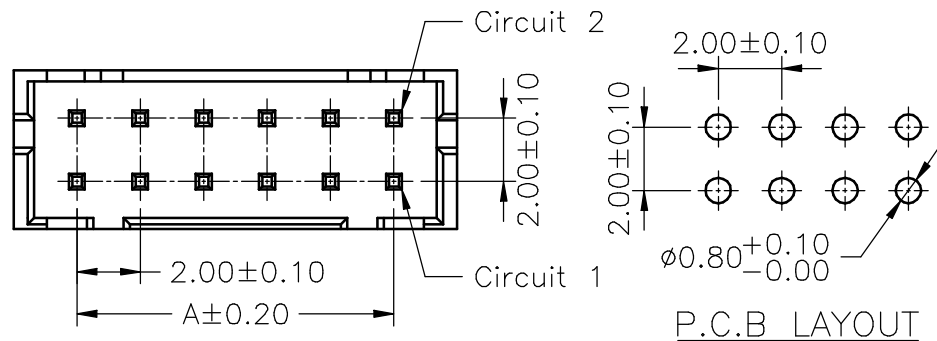


P.C.B LAYOUT

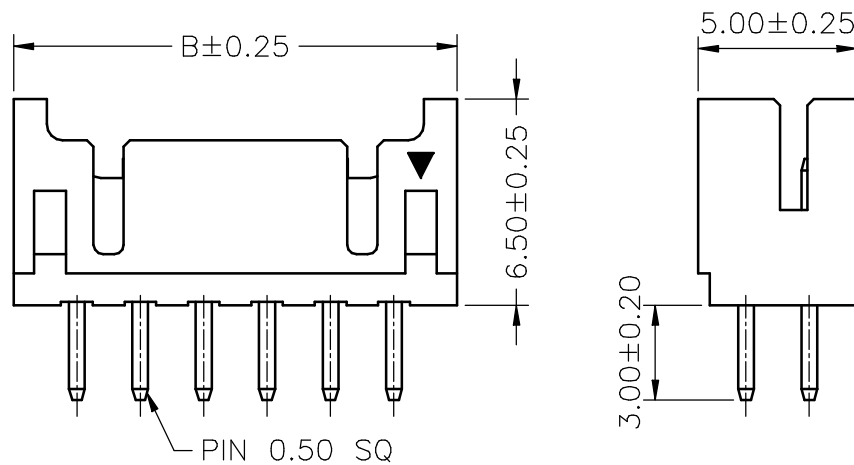

CJT® CHANGJIANG CONNECTORS CO., LTD.
CHANGJIANG CONNECTORS

Specification

Client:		Drawing No: A2009WV-2XNP	
Tolerance	Draw By: LIZhiQiang	Date: 2008-05-15	Unit:mm Scale:Enone
X. X≤0.25	Checked: HE.	Date: 2008-05-15	
X. XX≤0.15	Approved:	Date:	
X. XXX≤0.10	Material:	Edition: A	

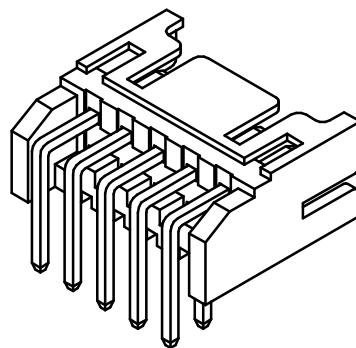

Specifications

Current rating: 2A AC,DC

Voltage rating: 250V AC,DC

Temperature range: -25°C ~ +85°C

Contact resistance: 30mΩ Max.

Insulation resistance: 1000MΩ Min.

Withstanding voltage: 800V AC/minute

Material: Nylon66 UL94V-0

REV	DATE	DESCRIPTTON	REVISER
1.0			

Ordering Information & Dimensions:

PART NO.	Dimensions	
	A	B
A2009WR-2×2P	2.00	6.00
A2009WR-2×3P	4.00	8.00
A2009WR-2×4P	6.00	10.00
A2009WR-2×5P	8.00	12.00
A2009WR-2×6P	10.00	14.00
A2009WR-2×7P	12.00	16.00
A2009WR-2×8P	14.00	18.00
A2009WR-2×9P	16.00	20.00
A2009WR-2×10P	18.00	22.00
A2009WR-2×11P	20.00	24.00
A2009WR-2×12P	22.00	26.00
A2009WR-2×13P	24.00	28.00
A2009WR-2×14P	26.00	30.00
A2009WR-2×15P	28.00	32.00
A2009WR-2×16P	30.00	34.00
A2009WR-2×17P	32.00	36.00
A2009WR-2×18P	34.00	38.00
A2009WR-2×19P	36.00	40.00
A2009WR-2×20P	38.00	42.00



Unit:mm



CHANGJIANG CONNECTORS CO., LTD.

Specification

Client:		Drawing No: A2009WR-2XNP	
Tolerance	Draw By: LIZhiQiang	Date: 2008-05-15	Unit:mm Scale:Enone
X. X ≤ 0.25	Checked: HE.	Date: 2008-05-15	
X. XX ≤ 0.15	Approved:	Date:	
X. XXX ≤ 0.10	Material:	Edition: A	

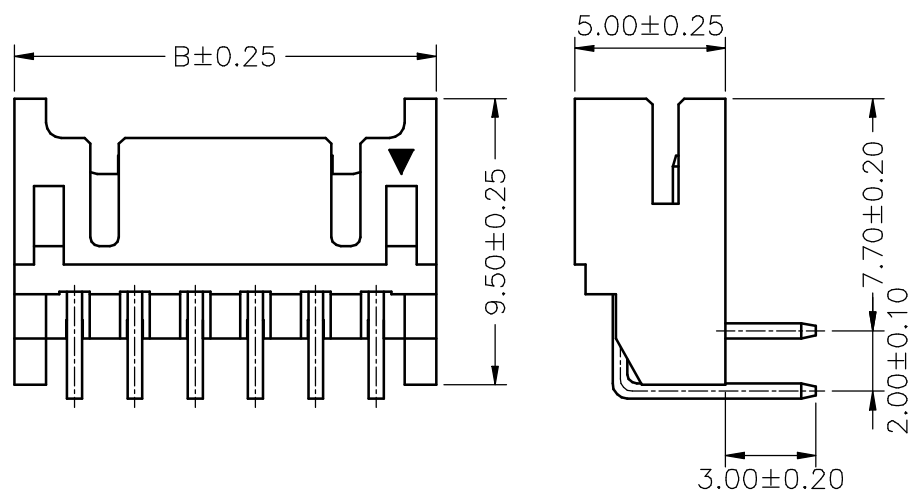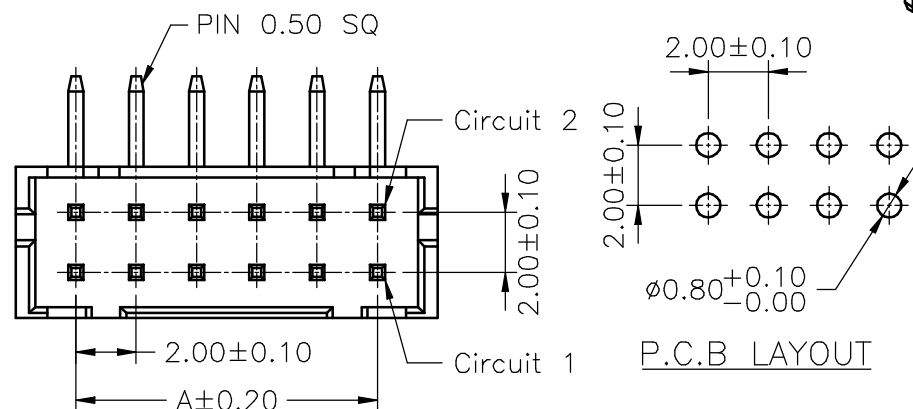

REV	DATE	DESCRIPTION	REVISOR
1.0			

Specifications
 Current rating: 2A AC,DC
 Voltage rating: 250V AC,DC
 Temperature range: -25℃ ~ +85℃
 Contact resistance: 30mΩ Max.
 Insulation resistance: 1000MΩ Min.
 Withstanding voltage: 800V AC/minute
 Material: Nylon66 UL94V-0

Ordering Information & Dimensions:

PART NO.	Dimensions		
	A	B	C
A2009WV-S-F-2×2P	2.00	8.50	4.00
A2009WV-S-F-2×3P	4.00	10.50	6.00
A2009WV-S-F-2×4P	6.00	12.50	8.00
A2009WV-S-F-2×5P	8.00	14.50	10.00
A2009WV-S-F-2×6P	10.00	16.50	12.00
A2009WV-S-F-2×7P	12.00	18.50	14.00
A2009WV-S-F-2×8P	14.00	20.50	16.00
A2009WV-S-F-2×9P	16.00	22.50	18.00
A2009WV-S-F-2×10P	18.00	24.50	20.00
A2009WV-S-F-2×11P	20.00	26.50	22.00
A2009WV-S-F-2×12P	22.00	28.50	24.00
A2009WV-S-F-2×13P	24.00	30.50	26.00
A2009WV-S-F-2×14P	26.00	32.50	28.00
A2009WV-S-F-2×15P	28.00	34.50	30.00
A2009WV-S-F-2×16P	30.00	36.50	32.00
A2009WV-S-F-2×20P	38.00	44.50	40.00

Unit:mm



Specification

Client:		Drawing No: A2009WV-S-F-2XNP	
Tolerance	Draw By: LIZhiQiang	Date: 2008-05-15	Unit:mm Scale:Enone
X. X≤0. 25	Checked: HE.	Date: 2008-05-15	
X. XX≤0. 15	Approved:	Date:	
X. XXX≤0. 10	Material:	Edition: A	

