


REV	DATE	DESCRIPTON	REVISOR
1.0			

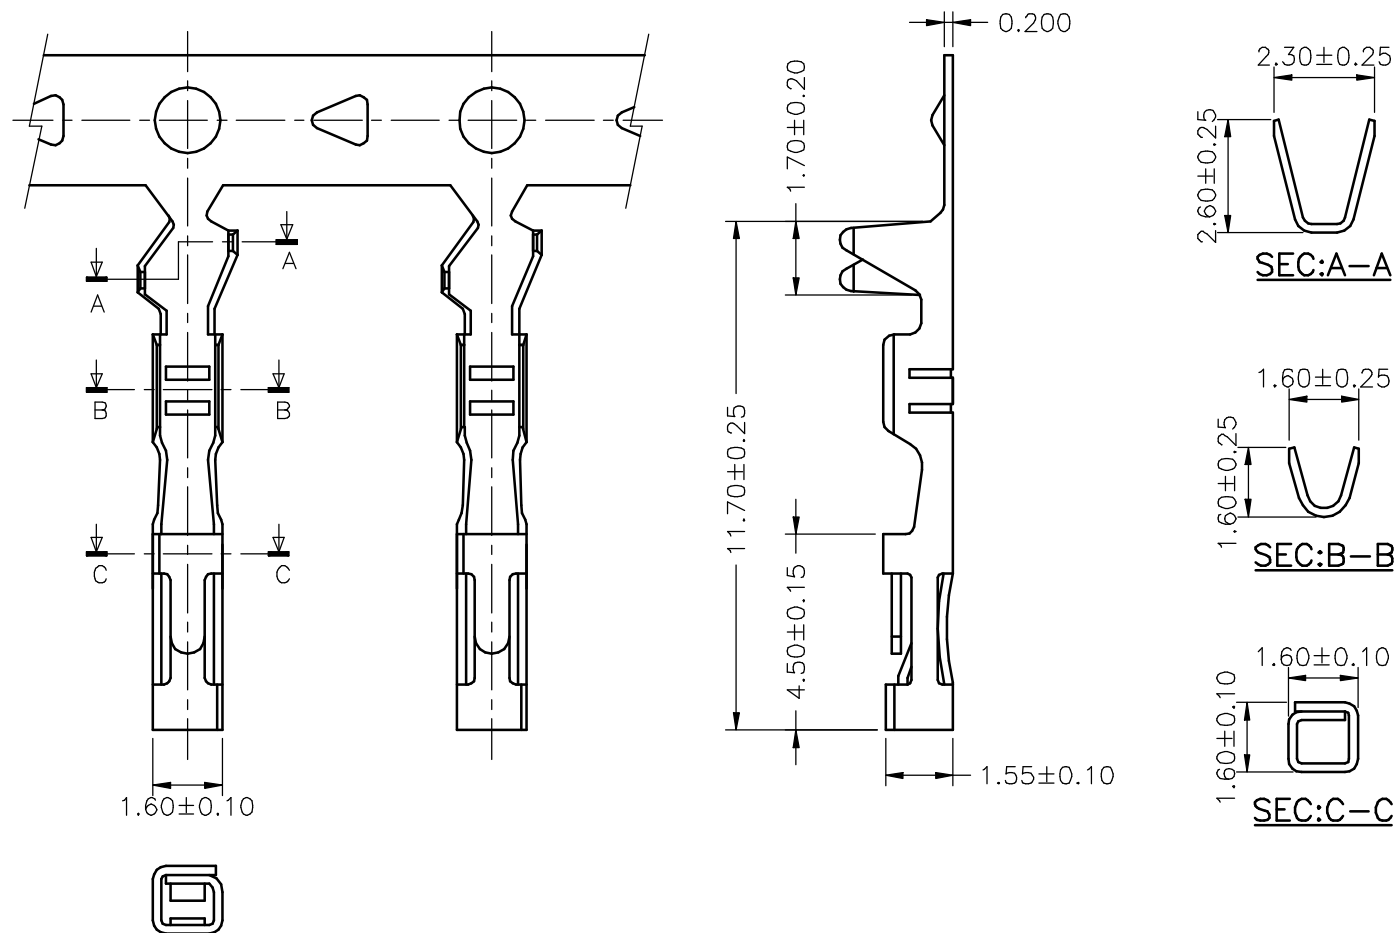

Ordering information & Specifications

Unit:mm

Part No	Wire Range	Insultion O. D.	Material	Finish	Qty/reel
A2510F-TB	AWG# 22-# 26	1.63mm(max)	Brass	Tin-plated	10,000 pcs
A2510F-GB	AWG# 22-# 26	1.63mm(max)	Brass	Gold-flash	10,000 pcs
A2510F-TP	AWG# 22-# 26	1.63mm(max)	Phosphor Bronze	Tin-plated	10,000 pcs
A2510F-GP	AWG# 22-# 26	1.63mm(max)	Phosphor Bronze	Gold-flash	10,000 pcs


Note:e-stamping before Tin-plated

CJT[®] CHANGJIANG CONNECTORS CO., LTD.
CHANGJIANG CONNECTORS

Specification

Client:		Drawing No: A2510-T	
Tolerance	Draw By: LIZhiQiang	Date: 2008-05-23	Unit:mm Scale:Enone
X. X≤0.25	Checked: HE.	Date: 2008-05-23	
X. XX≤0.15	Approved:	Date:	
X. XXX≤0.10	Material:	Edition: A	

REV	DATE	DESCRIPTION	REVISOR
1.0			

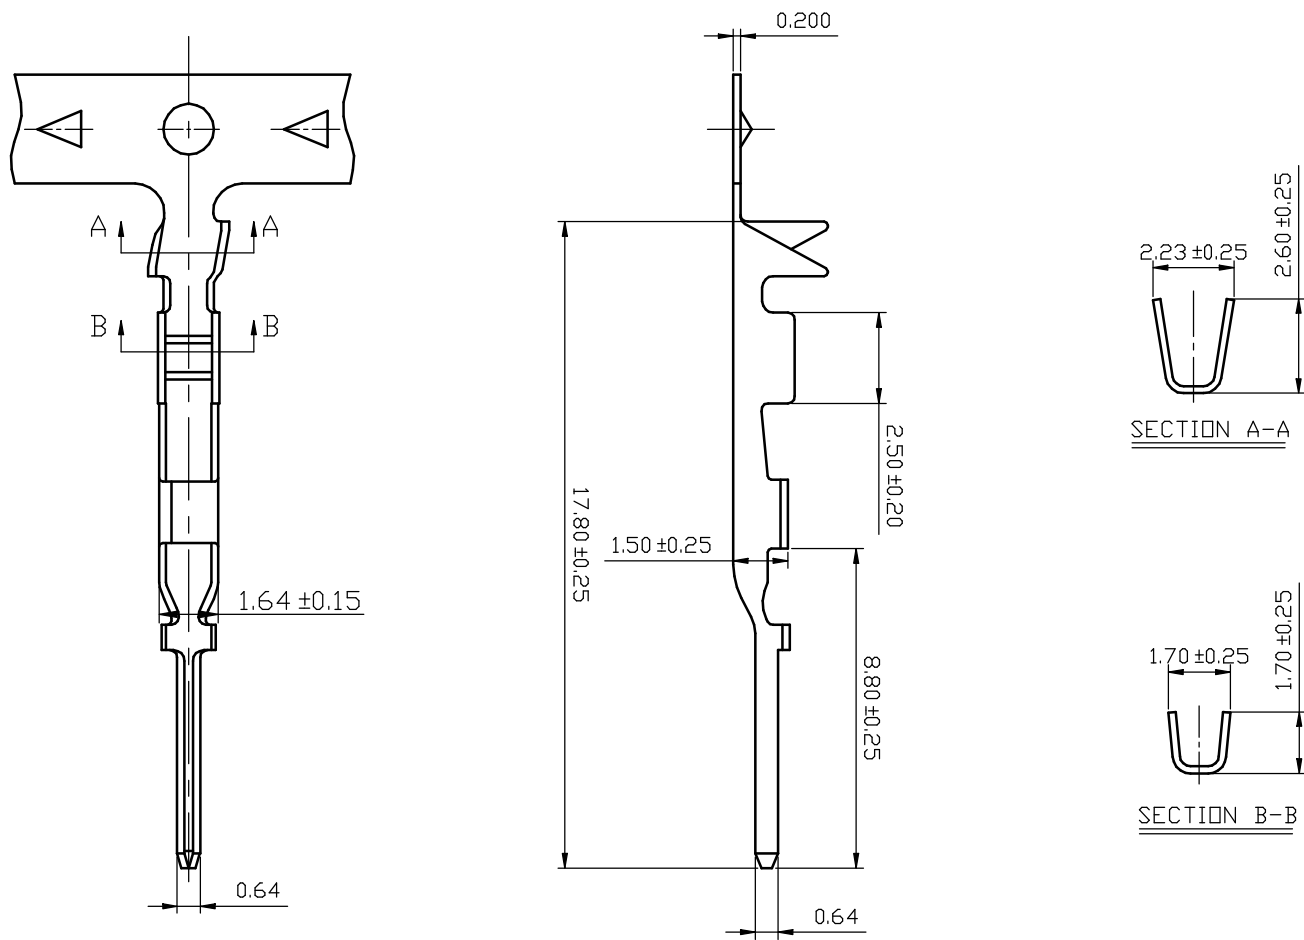

CJT® CHANGJIANG CONNECTORS CO., LTD.
CHANGJIANG CONNECTORS

Ordering information & Specifications

Unit:mm

Part No	Wire Range	Insultion O.D.	Material	Finish	Qty/reel
A2510M-TB	AWG# 22-# 26	1.63mm(max)	Brass	Tin-plated	10,000 pcs
A2510M-GB	AWG# 22-# 26	1.63mm(max)	Brass	Gold-flash	10,000 pcs

Note:e-stamping before Tin-plated


Specification

Client:		Drawing No: A2510-T	
Tolerance	Draw By: LIZhiQiang	Date: 2008-05-23	Unit:mm Scale:Enone
X.X ≤ 0.25	Checked: HE.	Date: 2008-05-23	
X.XX ≤ 0.15	Approved:	Date:	
X.XXX ≤ 0.10	Material:	Edition: A	

REV	DATE	DESCRIPTTON	REVISER
1.0			

Specifications

Current rating: 3A AC,DC
Voltage rating: 250V AC,DC
Temperature range: -25℃ ~ +85℃
Contact resistance: 20mΩ Max.
Insulation resistance: 1000MΩ Min.
Withstanding voltage: 1000V AC/minute
Material: Nylon 66,UL94V-2

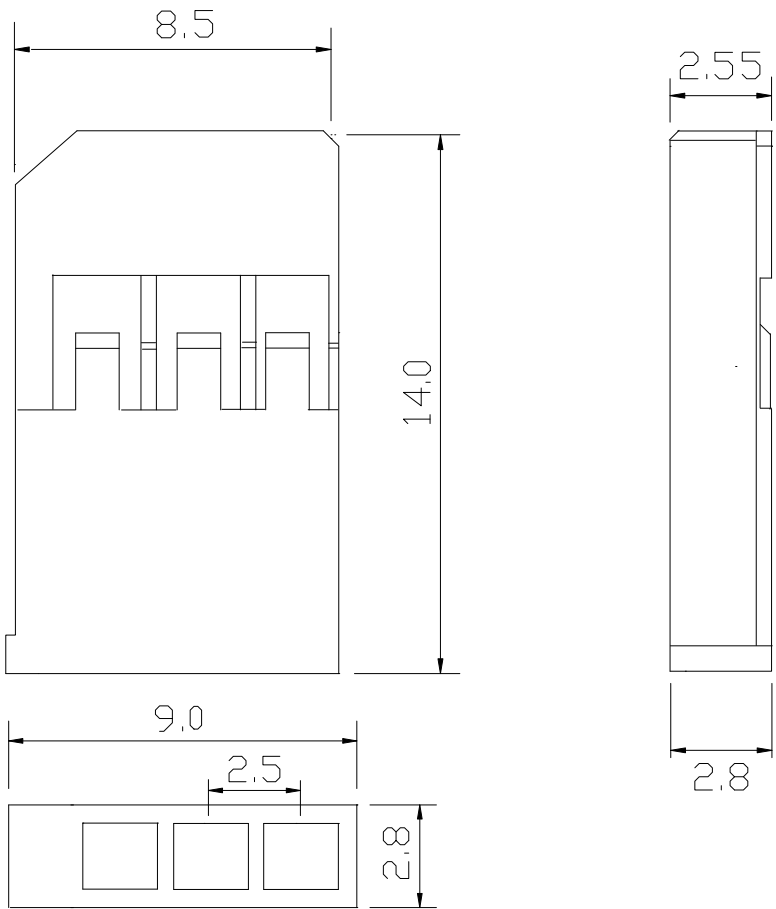

Specification				
Client:		Drawing No: A2510HF-3P-P		
Tolerance	Draw By: LIZhiQiang	Date: 2008-05-23	Unit:mm	Scale:Enone
X. X≤0. 25	Checked: HE.	Date: 2008-05-23		
X. XX≤0. 15	Approved:	Date:		
X. XXX≤0. 10	Material:	Edition: A		

REV	DATE	DESCRIPTTON	REVISER
1.0			

Specifications

Current rating: 3A AC,DC

Voltage rating: 250V AC,DC


Temperature range: -25°C ~ +85°C

Contact resistance: 20mΩ Max.

Insulation resistance: 1000MΩ Min.

Withstanding voltage: 1000V AC/minute

Material: Nylon 66,UL94V-2

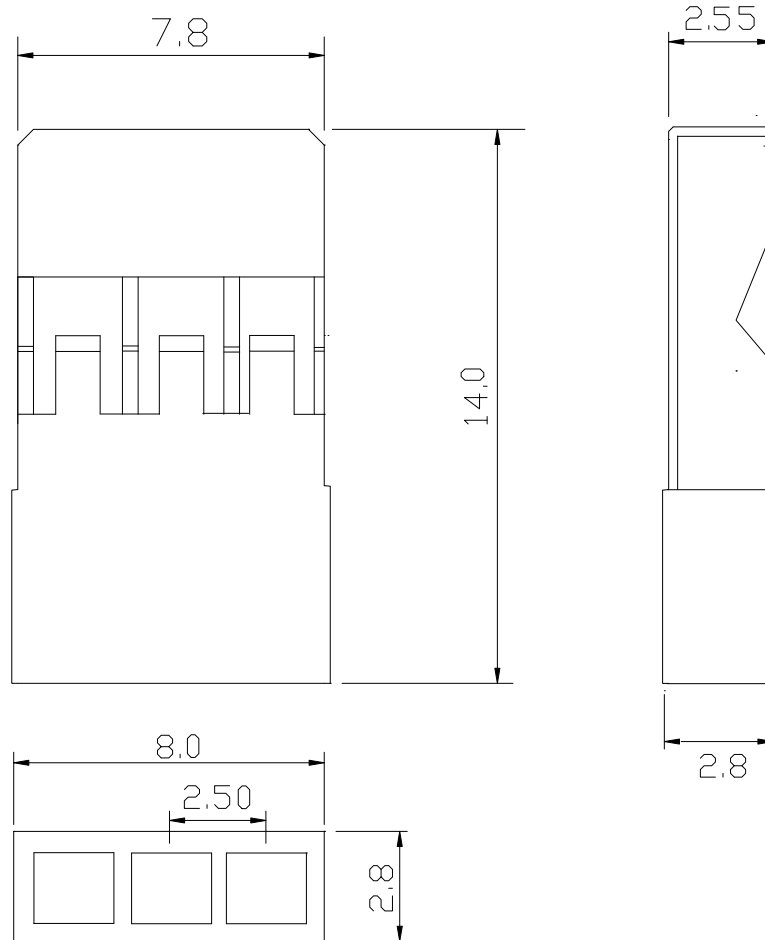

CJT[®] CHANGJIANG CONNECTORS CO., LTD.
CHANGJIANG CONNECTORS

Specification

Client:		Drawing No: A2510HF-3P-R	
Tolerance	Draw By: LIZhiQiang	Date: 2008-05-23	Unit:mm Scale:Enone
X. $X \leq 0.25$	Checked: HE.	Date: 2008-05-23	
X. $XX \leq 0.15$	Approved:	Date:	
X. $XXX \leq 0.10$	Material:	Edition: A	

REV	DATE	DESCRIPTION	REVISER
1.0			

Specifications

Current rating: 3A AC,DC

Voltage rating: 250V AC,DC





Temperature range: -25°C ~ +85°C

Contact resistance: 20mΩ Max.

Insulation resistance: 1000MΩ Min.

Withstanding voltage: 1000V AC/minute

Material: Nylon 66,UL94V-2

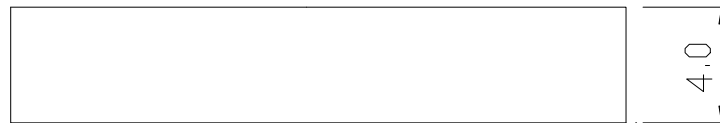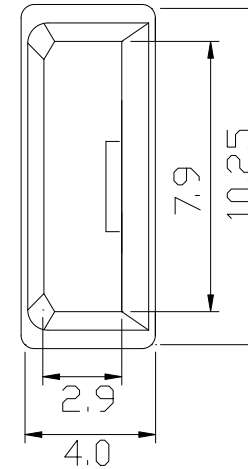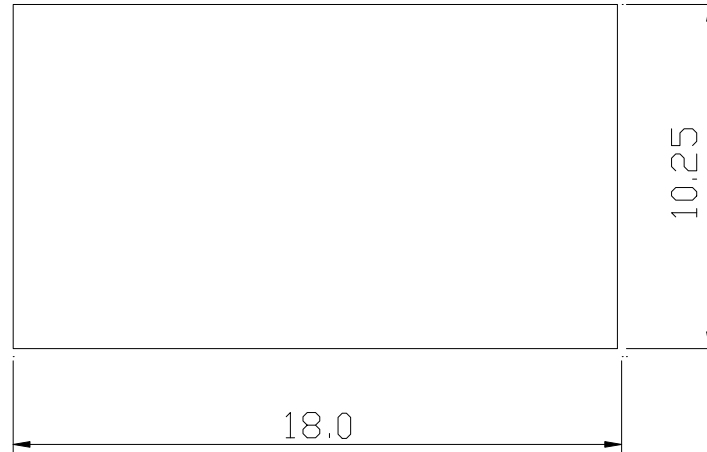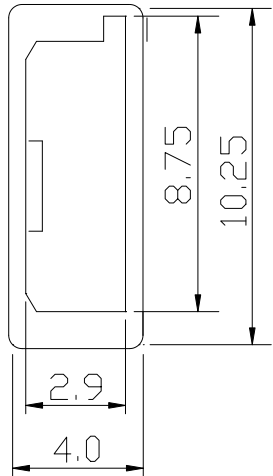

CJT[®] CHANGJIANG CONNECTORS CO., LTD.
CHANGJIANG CONNECTORS

Specification

Client:		Drawing No: A2510HM-P-R	
Tolerance	Draw By: LIZhiQiang	Date: 2008-05-23	Unit:mm Scale:Enone
X. X≤0.25	Checked: HE.	Date: 2008-05-23	
X. XX≤0.15	Approved:	Date:	
X. XXX≤0.10	Material:	Edition: A	

REV	DATE	DESCRIPTTON	REVISER
1.0			

Specifications

Current rating: 3A AC,DC

Voltage rating: 250V AC,DC




Temperature range: -25℃ ～ +85℃


Contact resistance: 20mΩ Max.

Insulation resistance: 1000MΩ Min.

Withstanding voltage: 1000V AC/minute

Material: Nylon 66,UL94V-2

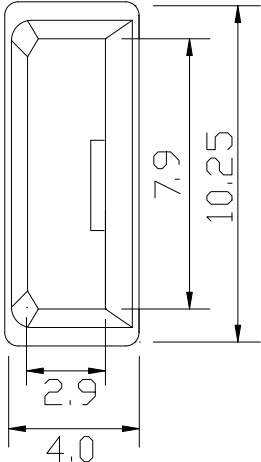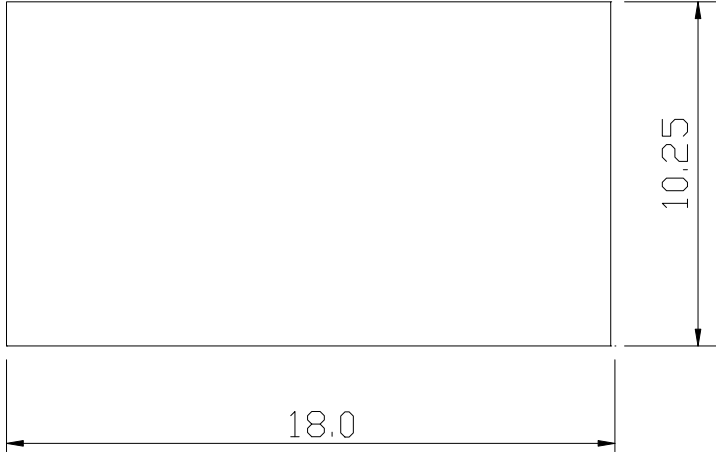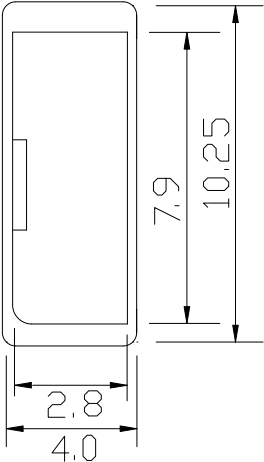

Specification				
Client:		Drawing No: A2510HM-R-R		
Tolerance	Draw By: LIZhiQiang	Date: 2008-05-23	Unit:mm Scale:Enone	
X. X≤0. 25	Checked: HE.	Date: 2008-05-23		
X. XX≤0. 15	Approved:	Date:		
X. XXX≤0. 10	Material:	Edition: A		