

SPECIFICATIONS

Current Rating: 7A AC,DC
 Voltage Rating: 250V AC,DC
 Temperature Range: -25°C ~ +85°C
 Contact Resistance: 10mΩ Max
 Insulation Resistance: 1000MΩ Min
 Withstanding Voltage: 1500V AC/minute
 Pin Material: Brass/Tin-plated
 Material: Nylon 66,UL94V-0




Ordering Information & Dimensions

PART NO.	Dimensions	
	A	B
A3966H-2P	3.96	9.62
A3966H-3P	7.92	13.58
A3966H-4P	11.88	17.54
A3966H-5P	15.84	21.50
A3966H-6P	19.80	25.46
A3966H-7P	23.76	29.42
A3966H-8P	27.72	33.38
A3966H-9P	31.68	37.34
A3966H-10P	35.64	41.30
A3966H-11P	39.60	45.26
A3966H-12P	43.56	49.22


Unit: mm

CJT [®] CHANGJIANG CONNECTORS CO.,LTD.		
Unit mm	Scale Enone	Sheet 1 of 1
Draw BY LIZQ	Approved : GONGYB	Title : 3.96mm PITCH HOUSING
General Tolerance		
AD	NEW RELEASE	2009.08.01
REV	DESCRIPTION	DATE
		x.x±0.35 x.xx±0.25 x.xxx±0.15
		ANGLE± ⊕
		DRAW NO 'A3966H-XP
		REV AD

AD	NEW RELEASE	2009.08.01
REV	DESCRIPTION	DATE

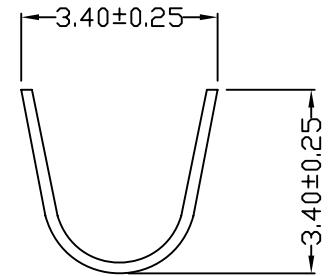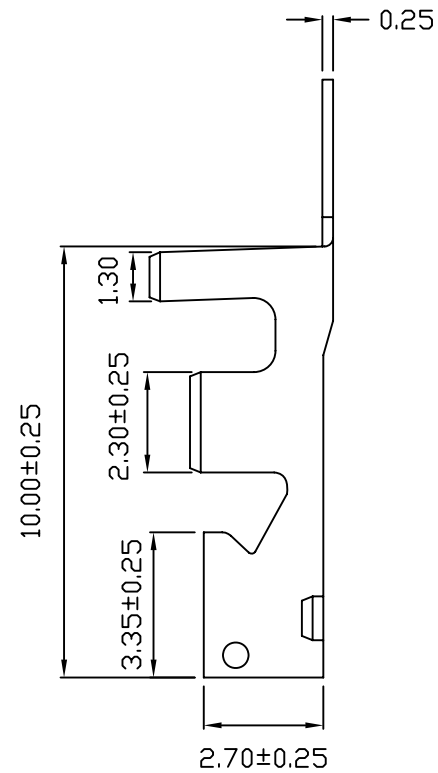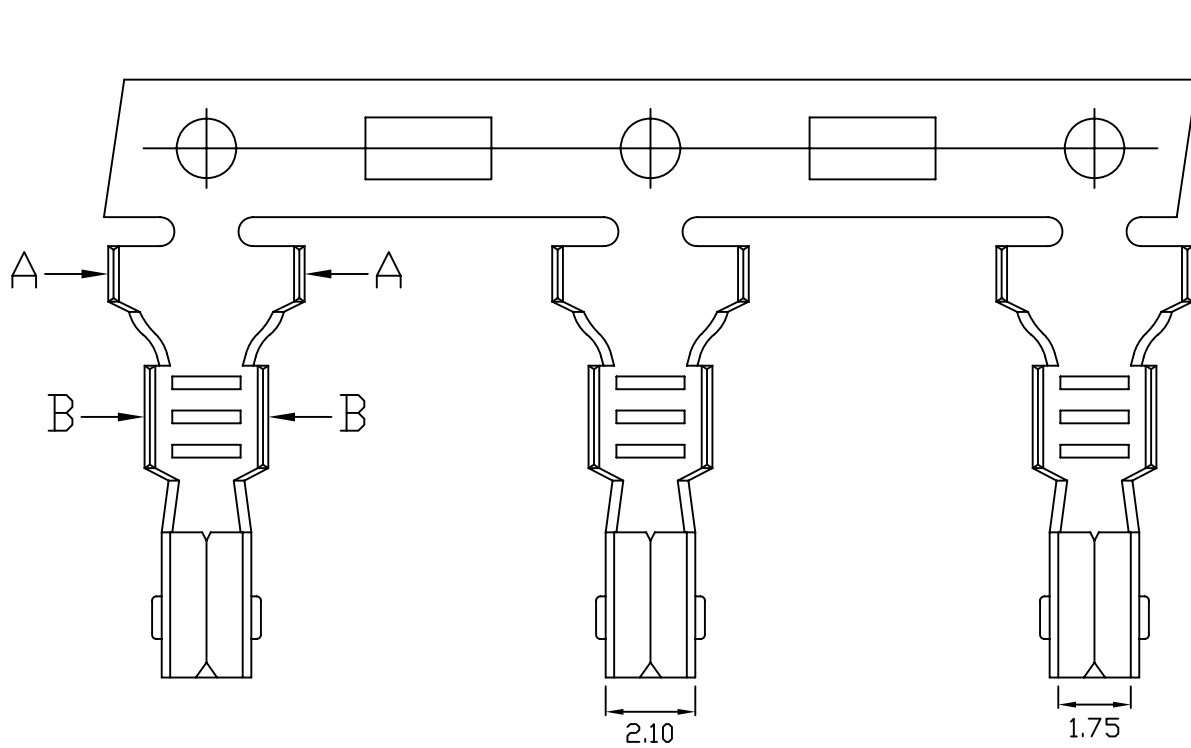

SEC:A-A



SEC:B-B


Ordering information & Specifications

Part No	Wire Range	Insulation O.D.	Material	Finish	Qty/reel
A3966-TB	AWG#18-#24	3.20mm(max)	Brass	Tin-plated	5,000 PCS

Note:stamping before Tin-plated

Unit:mm

AD	NEW RELEASE	2009.05.10
REV	DESCRIPTION	DATE

 CHANGJIANG CONNECTORS CO.,LTD.		
Unit	Scale	Sheet
mm	Enone	1 of 1
Draw BY	Approved :	
LIZQ	GONGYB	
General Toerance		
x.x±0.35	ANGLE±	
x.xx±0.25	▽⊕	
x.xxx±0.15		
Title :		
3.96mm PITCH		
CRIMP TERMINAL		
DRAW NO :		REV
A3966-T		AD