


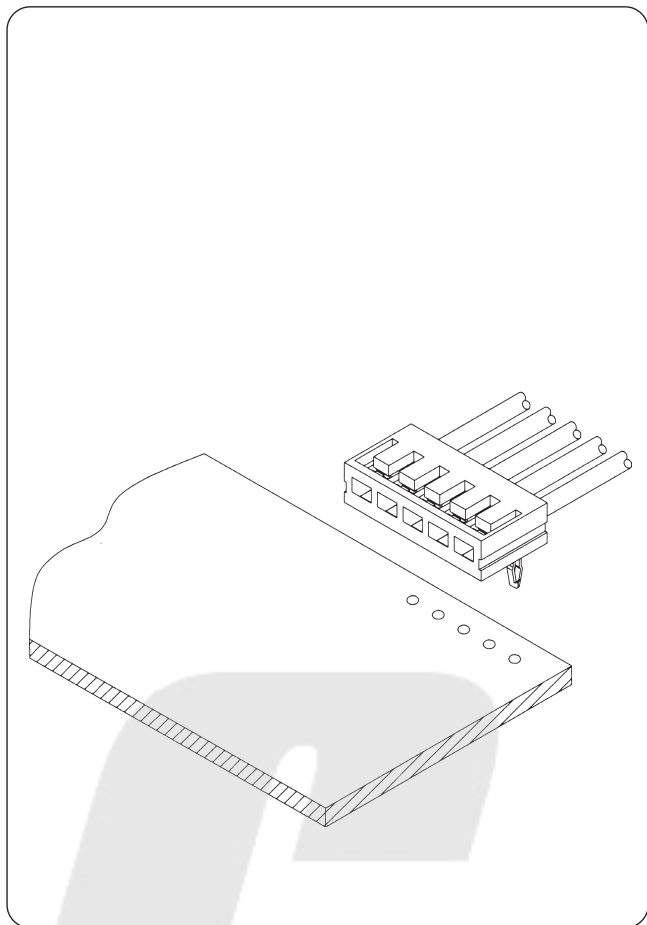

Specifications

Current rating: 3A AC,DC

Voltage rating: 250V AC,DC


Temperature range: -25°C ~ +85°C

Contact resistance: 10mΩ Max.

Insulation resistance: 1000MΩ Min.

Withstanding voltage: 800V AC/minute

Assembly layout

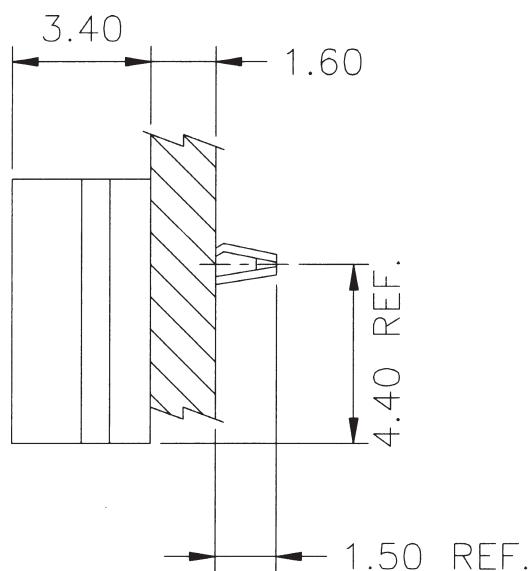


B2513-T

2.50mm pitch 90° Crimp Terminal

Reference Informations:

*Used in CJT B2513series Housing

*Tolarance:(unit:mm) .0 ±0.25/ .00 ±0.15/ .000 ±0.10

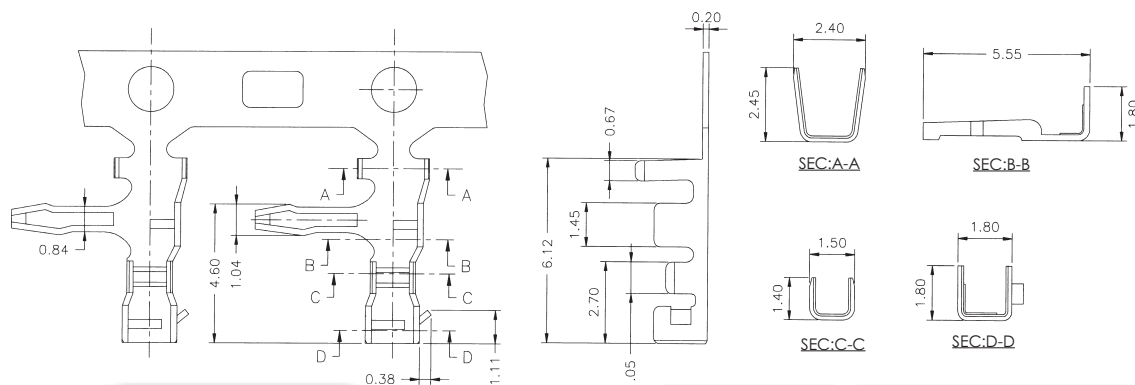

Ordering Information & Specifications:

Unit:mm

Part No.	Wire Range	Insulation O.D.	Material	Finish	Qty/reel
B2513-TB	AWG#22-#28	1.70mm(max)	Brass	Tin-plated	10,000pcs

B2513H



2.50mm pitch 90° Housing

Reference Informations:

*Material: Nylon 66,UL94V-0

*Suitable CJT B2513 series Terminal

*Tolarance:(unit:mm) .0 ±0.25/ .00 ±0.15/ .000 ±0.10

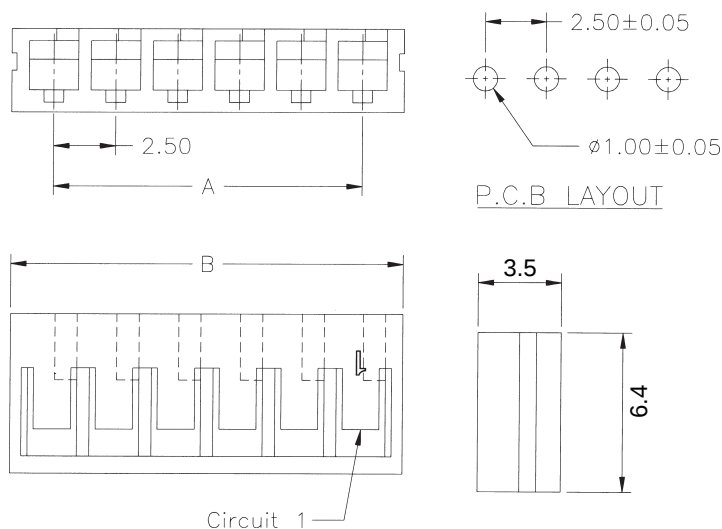

Ordering Information & Dimensions:

PART NO.	Dimensions	
	A	B
B2513H-2P	2.50	5.90
B2513H-3P	5.00	8.40
B2513H-4P	7.50	10.90
B2513H-5P	10.00	13.40
B2513H-6P	12.50	15.90
B2513H-7P	15.00	18.40
B2513H-8P	17.50	20.90
B2513H-9P	20.00	23.40
B2513H-10P	22.50	25.90
B2513H-11P	25.00	28.40
B2513H-12P	27.50	30.90
B2513H-13P	30.00	33.40
B2513H-14P	32.50	35.90
B2513H-15P	35.00	38.40
B2513H-16P	37.50	40.90

Unit:mm