





REV	DATE	DESCRIPTTON	REVISER
1.0			

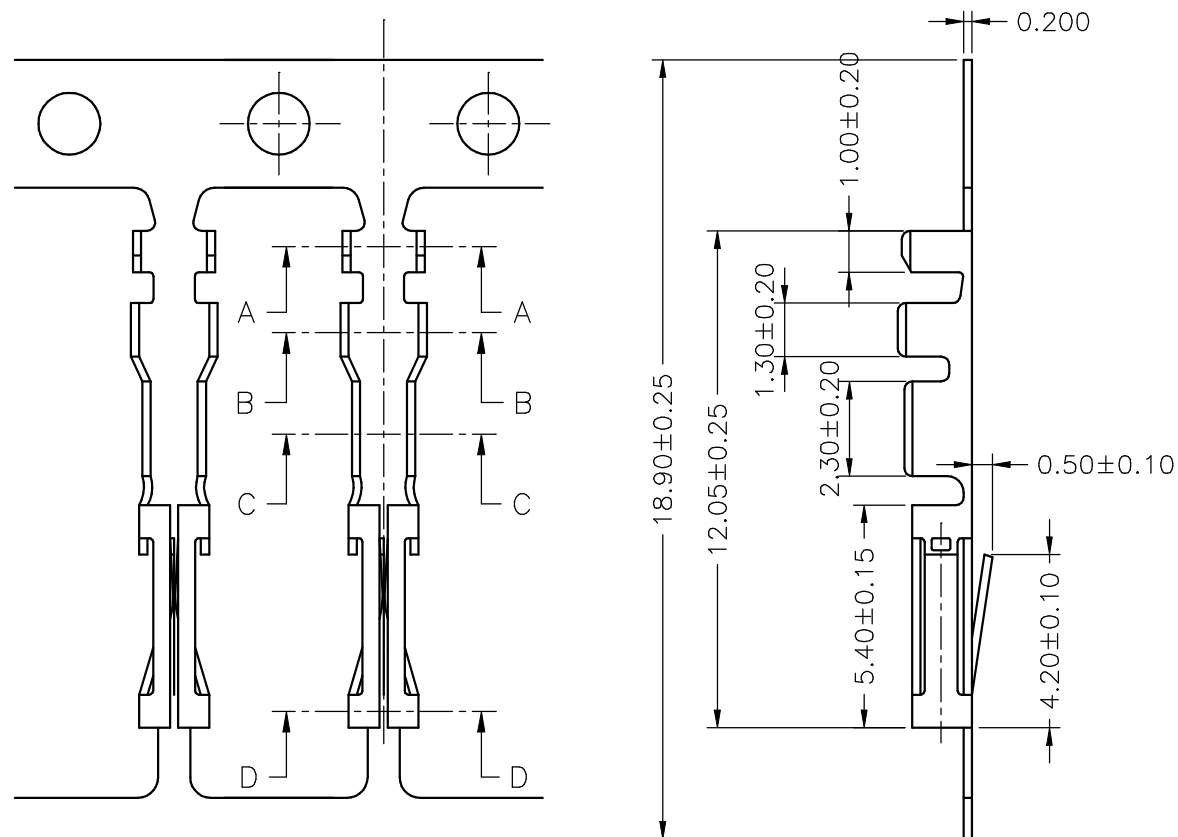


SEC:A-A



SEC:C-C



SEC:B-B

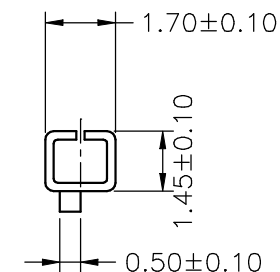

SEC:D-D

CJT® CHANGJIANG CONNECTORS CO., LTD.
CHANGJIANG CONNECTORS

Ordering information & Specifications

Unit:mm




Part No	Wire Range	Insultion O.D.	Material	Finish	Qty/reel
A2549-TP	AWG# 22-# 26	1.55mm(max)	Phosphor Bronze	Tin-plated	20,000 pcs

Note:e-stamping before Tin-plated


Specification

Client:		Drawing No: A2549-T	
Tolerance	Draw By: LIZhiQiang	Date: 2008-05-26	Unit:mm Scale:Enone
X. X≤0.25	Checked: HE.	Date: 2008-05-26	
X. XX≤0.15	Approved:	Date:	
X. XXX≤0.10	Material:	Edition: A	


REV	DATE	DESCRIPTTON	REVISER
1.0			

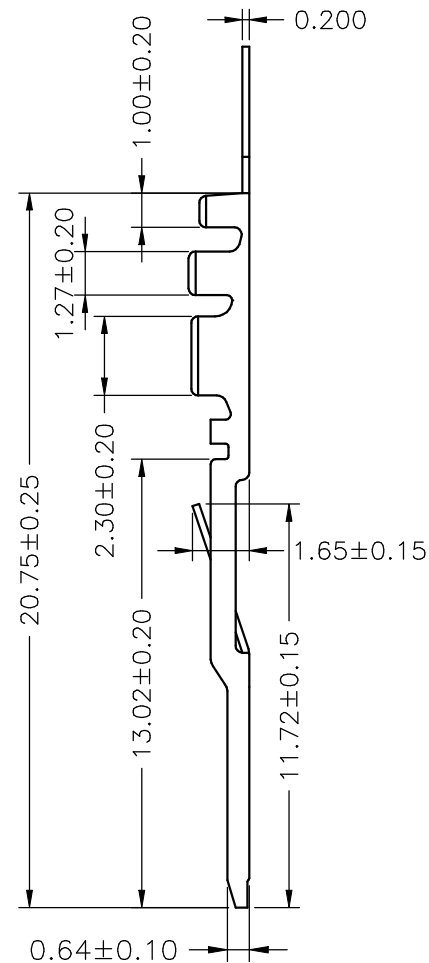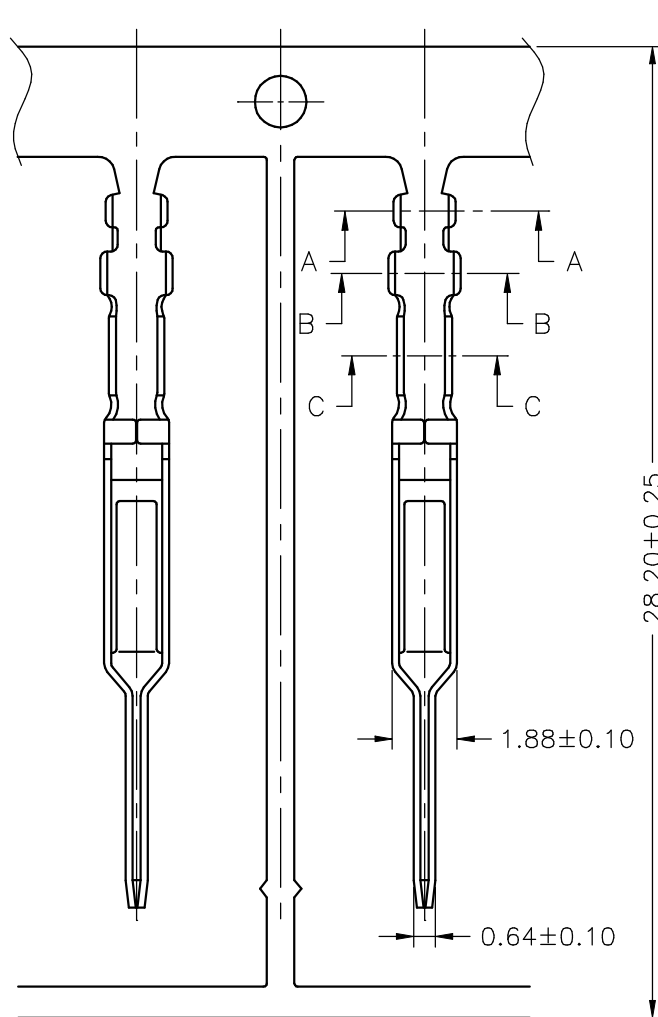

SEC:A-A



SEC:B-B



SEC:C-C



Ordering information & Specifications

Unit:mm

Part No	Wire Range	Insultion O.D.	Material	Finish	Qty/reel
A2549M-TP	AWG# 22-#26	1.55mm(max)	Phosphor Bronze	Tin-plated	11,000 pcs

Note:e-stamping before Tin-plated

Specification

Client:		Drawing No: A2549M-T	
Tolerance	Draw By: LIZhiQiang	Date: 2008-05-26	Unit:mm Scale:Enone
X.X≤0.25	Checked: HE.	Date: 2008-05-26	
X.XX≤0.15	Approved:	Date:	
X.XXX≤0.10	Material:	Edition: A	

SPECIFICATIONS

Current Rating: 3A AC,DC

Voltage Rating: 250V AC,DC


Temperature Range: $-25^{\circ}\text{C} \sim +85^{\circ}\text{C}$ Contact Resistance: $20\text{m}\Omega$ MaxInsulation Resistance: $1000\text{M}\Omega$ Min

Withstanding Voltage: 1000V AC/minute




Material: PBT,UL94V-0

Color: Natural(Black)

REV	DATE	DESCRIPTTON	REVISER
1.0			

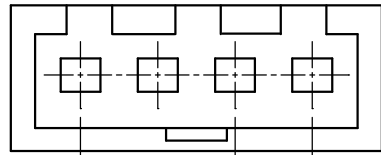

2.54 ± 0.10
 $A \pm 0.20$

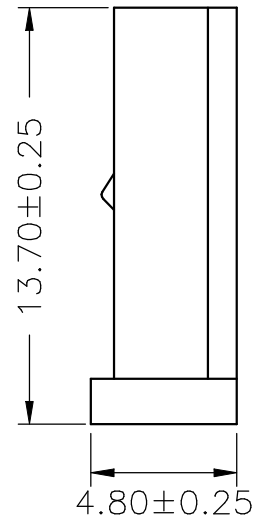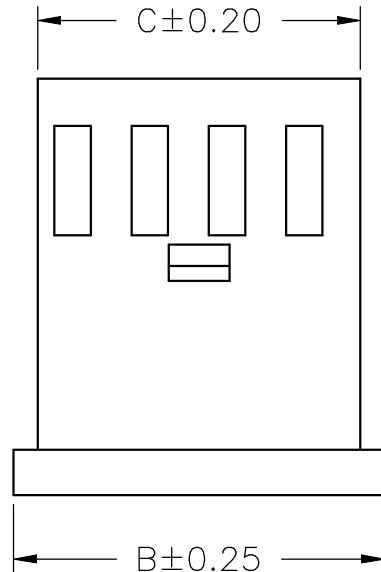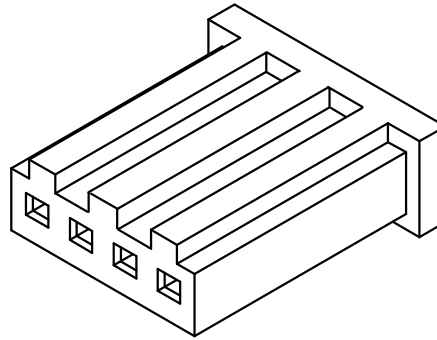

Ordering Information & Dimensions:




PART NO.	Dimensions	
	A	B
A2549H-2P	2.54	5.60
A2549H-3P	5.08	8.14
A2549H-4P	7.62	10.68
A2549H-5P	10.16	13.22
A2549H-6P	12.70	15.76
A2549H-7P	15.24	18.30
A2549H-8P	17.78	20.84
A2549H-9P	20.32	23.38
A2549H-10P	22.86	25.92
A2549H-11P	25.40	28.46
A2549H-12P	27.94	31.00
A2549H-13P	30.48	33.54
A2549H-14P	33.02	36.08
A2549H-15P	35.56	38.62
A2549H-16P	38.10	41.16
A2549H-17P	40.64	43.70
A2549H-18P	43.18	46.24
A2549H-19P	45.72	48.78
A2549H-20P	48.26	51.32
A2549H-21P	50.80	53.86
A2549H-22P	53.34	56.40




CHANGJIANG CONNECTORS CO., LTD.

Specification


Client:		Drawing No: A2549H-NP	
Tolerance	Draw By: LIZhiQiang	Date: 2008-05-26	Unit:mm Scale:Enone
X. $X \leq 0.25$	Checked: HE.	Date: 2008-05-26	
X. $XX \leq 0.15$	Approved:	Date:	
X. $XXX \leq 0.10$	Material:	Edition: A	

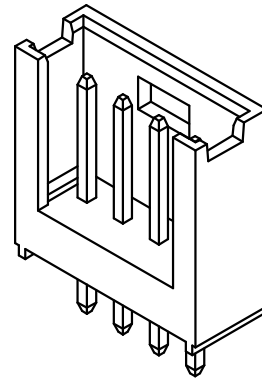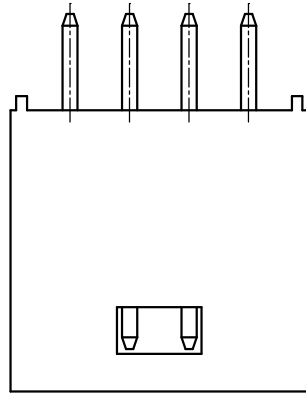


2.54 ± 0.10
 $A \pm 0.20$

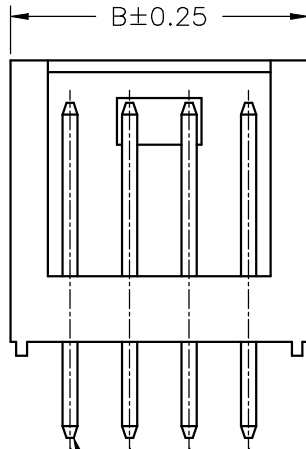

PIN 0.64 SQ



P.C.B. LAYOUT

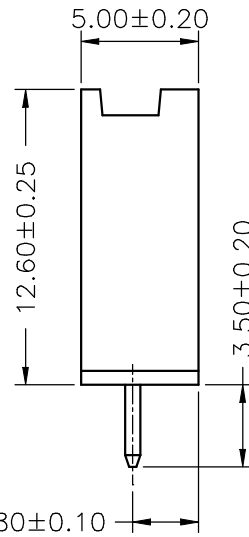

SPECIFICATIONS

Current Rating: 3A AC,DC

Voltage Rating: 250V AC,DC

Temperature Range: $-25^{\circ}\text{C} \sim +85^{\circ}\text{C}$

Contact Resistance: $20\text{m}\Omega$ Max

Insulation Resistance: $1000\text{M}\Omega$ Min

Withstanding Voltage: 1000V AC/minute

Pin Material: Brass/Tin-plated

Material: PBT,UL94V-0

Color: Natural(Black)

REV	DATE	DESCRIPTON	REVISER
1.0			





Ordering Information & Dimensions:

PART NO.	Dimensions	
	A	B
A2549WV-2P	2.54	7.70
A2549WV-3P	5.08	10.20
A2549WV-4P	7.62	12.70
A2549WV-5P	10.16	15.20
A2549WV-6P	12.70	17.80
A2549WV-7P	15.24	20.30
A2549WV-8P	17.78	22.90
A2549WV-9P	20.32	25.40
A2549WV-10P	22.86	28.00
A2549WV-11P	25.40	30.50
A2549WV-12P	27.94	33.10
A2549WV-13P	30.48	35.60
A2549WV-14P	33.02	38.10
A2549WV-15P	35.56	40.70
A2549WV-16P	38.10	43.20
A2549WV-17P	40.64	45.70
A2549WV-18P	43.18	48.20
A2549WV-19P	45.72	50.70
A2549WV-20P	48.26	53.20
A2549WV-21P	50.80	55.70
A2549WV-22P	53.34	58.50



CJT[®] CHANGJIANG CONNECTORS CO., LTD.
CHANGJIANG CONNECTORS

Specification


Client:		Drawing No: A2549WV-NP	
Tolerance	Draw By: LIZhiQiang	Date: 2008-05-26	Unit:mm Scale:Enone
X. $X \leq 0.25$	Checked: HE.	Date: 2008-05-26	
X. $XX \leq 0.15$	Approved:	Date:	
X. $XXX \leq 0.10$	Material:	Edition: A	

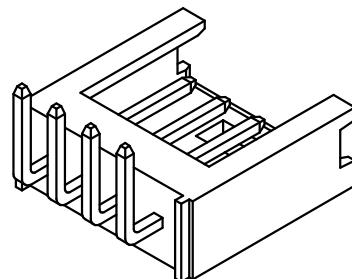

P.C.B. LAYOUT

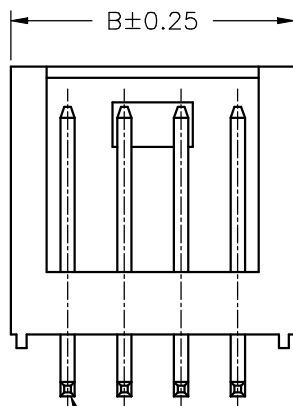

PIN 0.64 SQ

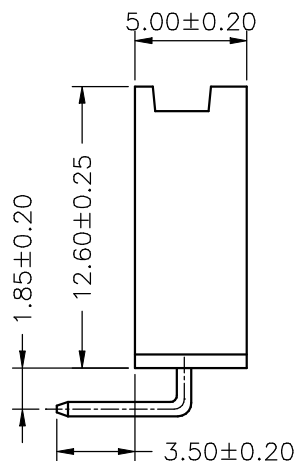

SPECIFICATIONS

Current Rating: 3A AC,DC

Voltage Rating: 250V AC,DC

Temperature Range: -25°C ~ +85°C

Contact Resistance: 20mΩ Max

Insulation Resistance: 1000MΩ Min

Withstanding Voltage: 1000V AC/minute

Pin Material: Brass/Tin-plated

Material: PBT,UL94V-0

Color: Natural(Black)

Ordering Information & Dimensions:

PART NO.	Dimensions	
	A	B
A2549WR-2P	2.54	7.70
A2549WR-3P	5.08	10.20
A2549WR-4P	7.62	12.70
A2549WR-5P	10.16	15.20
A2549WR-6P	12.70	17.80
A2549WR-7P	15.24	20.30
A2549WR-8P	17.78	22.90
A2549WR-9P	20.32	25.40
A2549WR-10P	22.86	28.00
A2549WR-11P	25.40	30.50
A2549WR-12P	27.94	33.10
A2549WR-13P	30.48	35.60
A2549WR-14P	33.02	38.10
A2549WR-15P	35.56	40.70
A2549WR-16P	38.10	43.20
A2549WR-17P	40.64	45.70
A2549WR-18P	43.18	48.20
A2549WR-19P	45.72	50.70
A2549WR-20P	48.26	53.20
A2549WR-21P	50.80	55.70
A2549WR-22P	53.34	58.50



CHANGJIANG CONNECTORS CO., LTD.

Specification

Client:

Drawing No: A2549WR-NP

Tolerance

Draw By: LIZhiQiang

Date: 2008-05-26

Unit:mm Scale:Enone

X. X≤0.25

Checked: HE.

Date: 2008-05-26

X. XX≤0.15

Approved:

Date:

X. XXX≤0.10

Material:

Edition: A

