


■ JML06-1 可调电容模样图 ↓



■ JML06-1 尺寸图 ↓

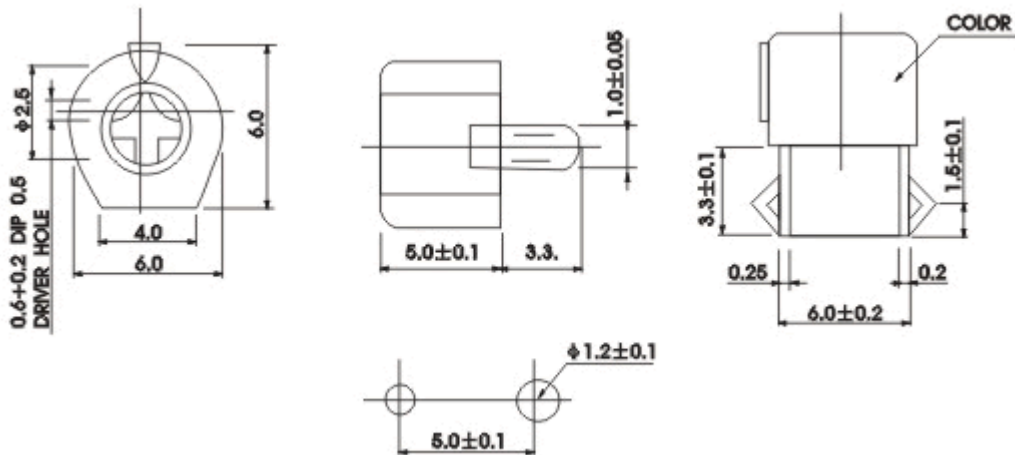

■ 技术参考数据 ↓

Part NO	Capacitance(PF)		Q 1MHz. C max.	Temp.Coeff. ppm/°C	Remarks
	min.	max			
HCV 06 A 050	less than 2.0	5.0 ± 100 0 %	300min	NPO ± 250	Blue
HCV 06 C 100	3.0	10.0 ± 100 0 %		White	
HCV 06 C 200	5.0	20.0 ± 100 0 %		Red	
HCV 06 E 300	6.5	30.0 ± 50 0 %	200min	N1000 ± 500	Green
HCV 06 F 400	7.0	40.0 ± 50 10 %		Yellow	
HCV 06 F 500	10.0	50.0 ± 50 10 %		Brown	
HCV 06 F 600	12.0	60.0 ± 50 10 %		Brown	
HCV 06 F 700	15.0	70.0 ± 50 10 %		N2200 ± 800	Brown

- Rated Voltage : 100 VDC
- Insulation Resistance : $10^4 M\Omega$ min
- Working Temperature Range : -25 to +85°C
- Withstanding Voltage : 220 VDC
- Torque : 15~150g.cm