


■ EVM3Y/3E 可调电阻模样图 ↓



alibaba.com.cn

■ EVM3Y/3E 可调电阻尺寸图 ↓

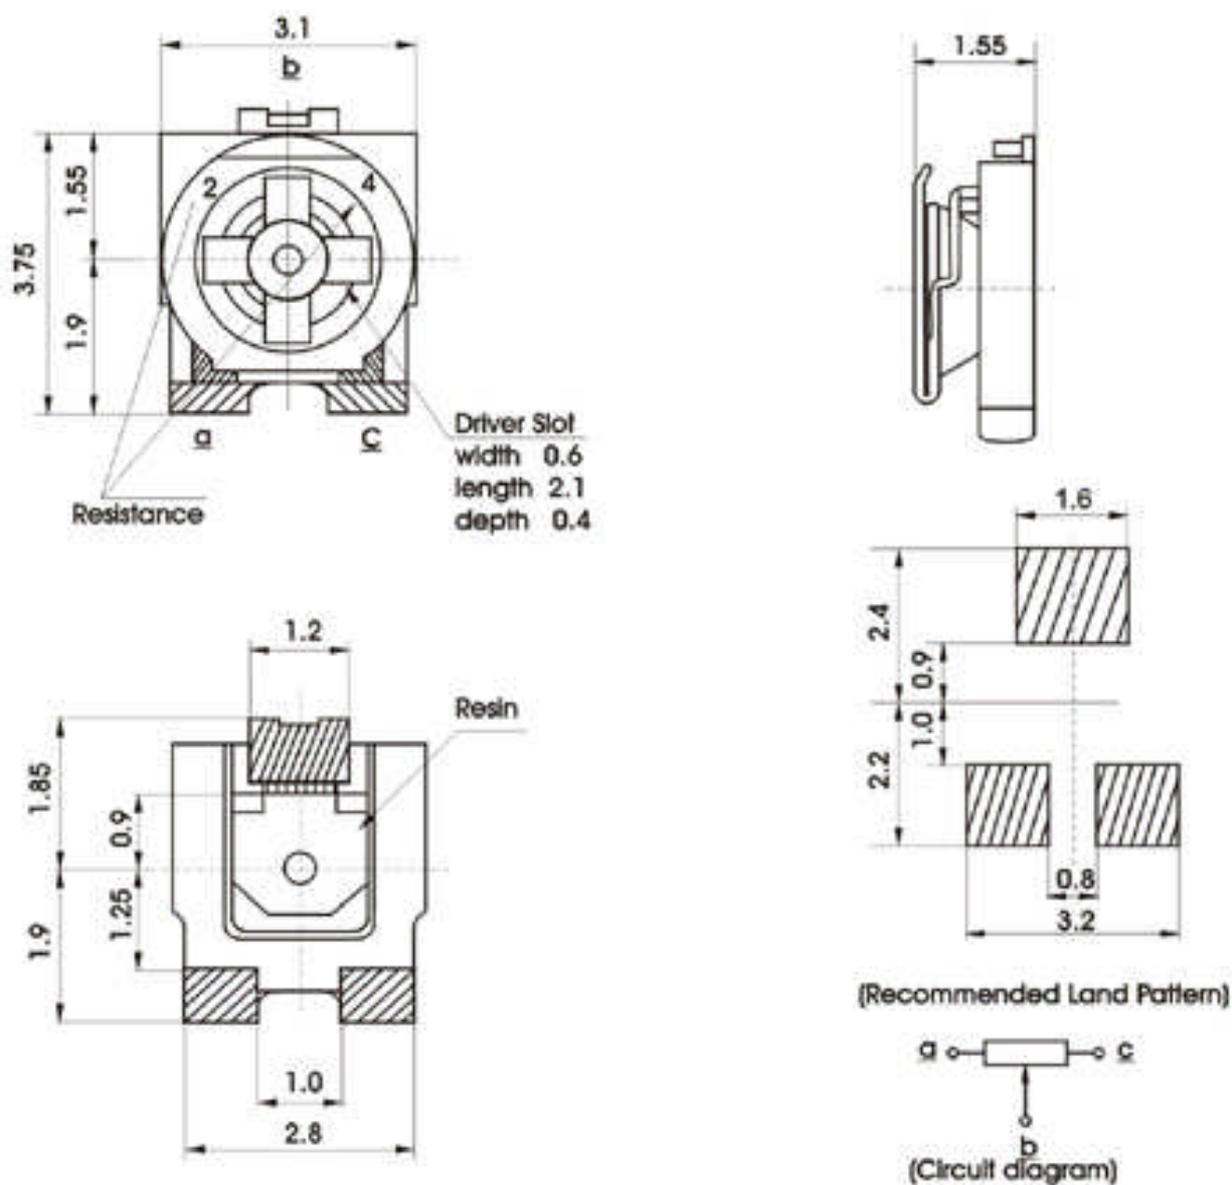


■ EVM3Y/3E 可调电阻技术参考数据 ↓

Panasonic


SMT Trimmer Potentiometers/EVM3Y/3S

■ Dimensions in mm (not to scale)

● 3-terminal, for Automatic Trimming Adjustment/Low-profile EVM3Y

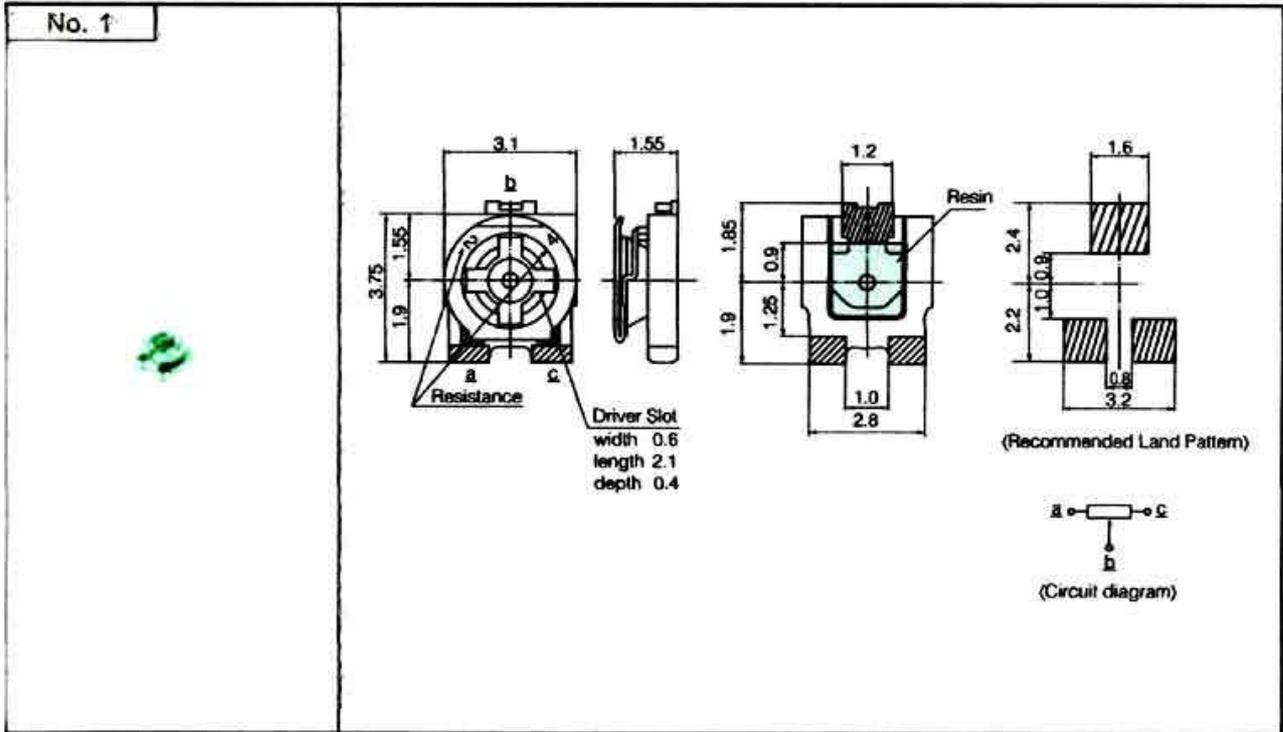

● 3-terminal, Both Sides Adjust EVM3S

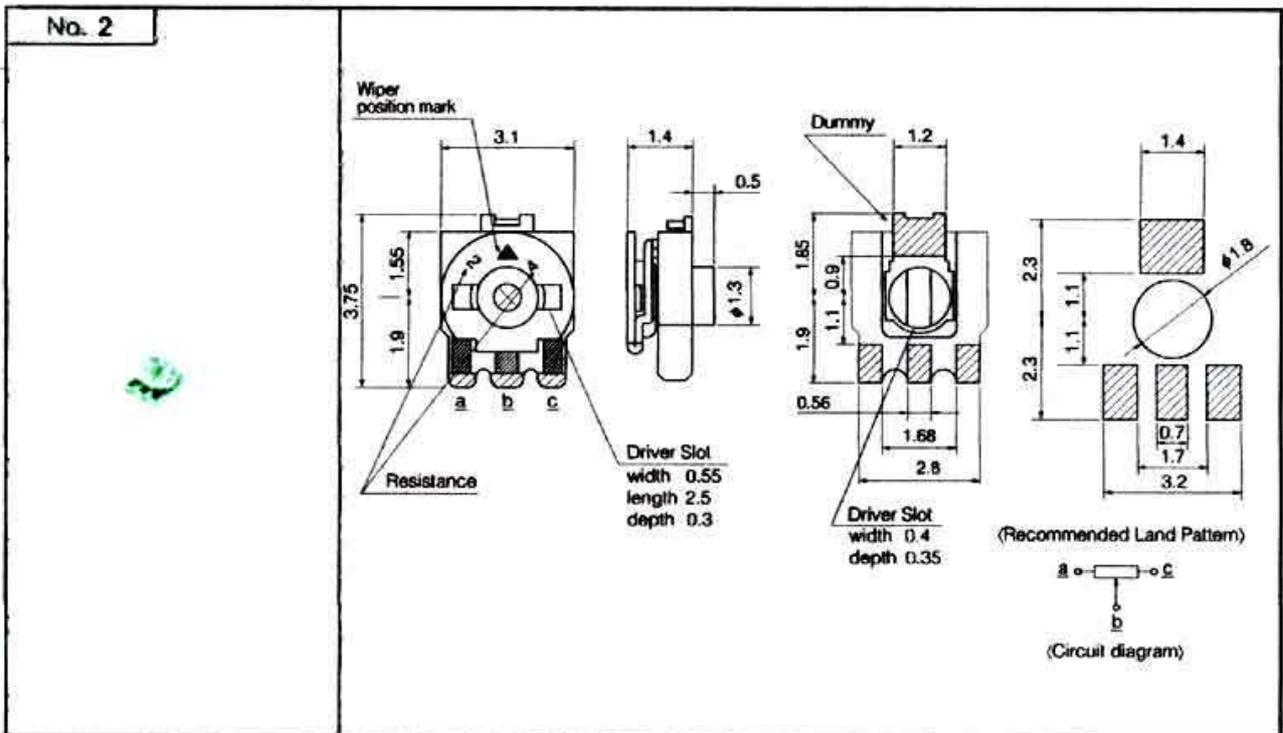

Design, Specifications are subject to change without notice. Ask factory for technical specifications before purchase and/or use. Whenever a doubt about safety arises from this product, please inform us immediately for technical consultation without fail.



Panasonic

SMT Trimmer Potentiometers EVM3Y/3S

3 mm Square SMT Trimmer Potentiometers (Cermet, Open Frame Type)

Type: **EVM3Y**
EVM3S


■ Features

- Low-profile for automatic adjustment type with knob (EVM3Y)
- Both sides adjust type (EVM3S) for reflow soldering
- Excellent mounting efficiency
- Conforming to JIS C5261

■ Recommended Applications

- Audio visual equipment, Office Automation equipment, Communication equipment
- Other general electronic equipments

■ Explanation of Part Numbers

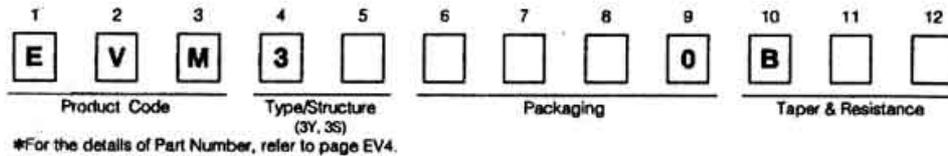

■ Major Specifications

| | |
|---------------------------------------|-----------------------------|
| Total Resistance Value | 100 Ω to 1 MΩ |
| Resistance Tolerance | ±25 % |
| Power Rating | 0.15 W |
| Maximum Operating Voltage | 50 V |
| Rotation Torque | 2 to 20 mN·m |
| Temperature Coefficient of Resistance | ±250 × 10 ⁻⁶ /°C |

■ Minimum Quantity/Packing Unit

| Part Number | Taping | | | Bulk | |
|-------------|-------------------|--------------------|-------------------|-------------------|--------------------|
| | Quantity per reel | Packaging quantity | Dia. of reel (mm) | Quantity per pack | Packaging quantity |
| EVM3Y | 2000 | 10000 | φ178 | 1000 | 5000 |
| | 8000 | 40000 | φ330 | | |
| EVM3S | 2000 | 10000 | φ178 | | |
| | 7500 | 37500 | φ330 | | |

Design. Specifications are subject to change without notice. Ask factory for technical specifications before purchase and/or use. Whenever a doubt about safety arises from this product, please inform us immediately for technical consultation without fail.