



128*64DOTS

39±0.2
36.0 V.A.
33.26 A.A.

31.1±0.2
26.5±0.2
23.5 V.A.
20.46 A.A.

14.5
11.5

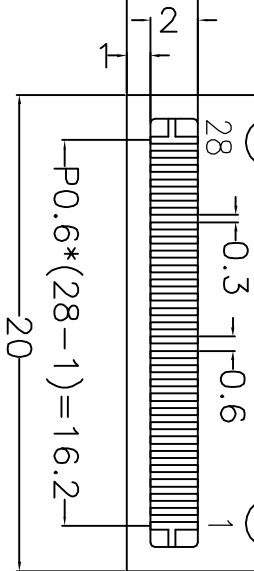

—LIGHT SHIELDING TAPE

PIN ASSIGNMENT

| PIN | SYMBOL | PIN | SYMBOL |
|-----|--------|-----|--------|
| 1 | CS1 | 15 | VOUT |
| 2 | RES | 16 | CAP3P |
| 3 | A0 | 17 | CAP1N |
| 4 | WR | 18 | CAP1P |
| 5 | RD | 19 | CAP2P |
| 6 | D0 | 20 | CAP2N |
| 7 | D1 | 21 | V4 |
| 8 | D2 | 22 | V3 |
| 9 | D3 | 23 | V2 |
| 10 | D4 | 24 | V1 |
| 11 | D5 | 25 | V0 |
| 12 | D6 | 26 | C86 |
| 13 | D7 | 27 | P/S |
| 14 | VSS | 28 | VDD |

1. ALL DIMENSIONS ARE IN mm WITH 0.20 TOLERANCE UNLESS OTHERWISE SPECIFIED
2. VIEWING ANGLE: 6:00 O'CLOCK
3. POLARIZER TYPE: TRANSPARENT, POSITIVE
4. DISPLAY TYPE: FSTN
5. OPERATING VOLTAGE: 3.3V
6. DRIVE MOKE: 1/64 DUTY, 1/9 BIAS, Vop9.0V
7. OPERATING TEMPERATURE: -20 °C ~ +70 °C
8. STORAGE TEMPERATURE: -30 °C ~ +80 °C
9. CONNECTOR: COG ST7565P

HOT DISPLAY

Dwg Title HTG12864C-0.6

Dwg No. Date

Scale Unit Tol. Date 2004-12-18

Drawn Unit Checked Approved

DOU