


惠州鑫恒通能源科技有限公司 HUIZHOU WALLYKING BATTERY CO.,LTD

电
池
BATTERY

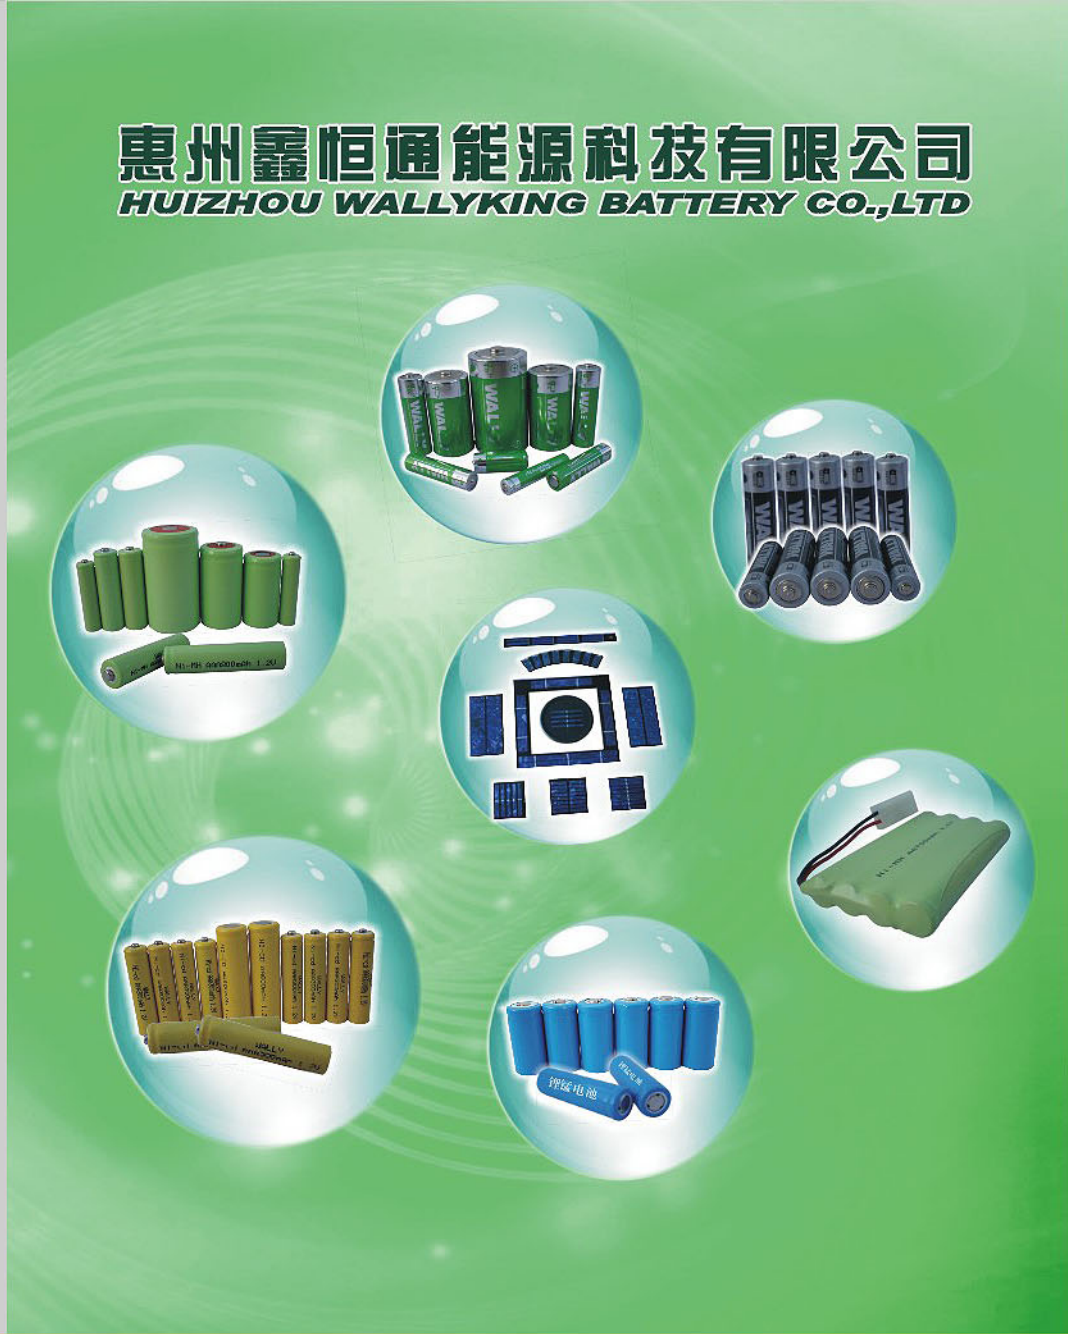

WALLY

倾 力 打 造 无 限 动 力

BUILD WITH GREAT ENERGY

INFINITE DYNAMIC FORCE



公司简介

惠州鑫恒通能源科技有限公司是一家集设计、开发、生产、销售为一体的专业电池公司。拥有国际上先进的一次性碳性、碱性、锂锰电池及二次性可充镍氢、镍镉电池自动电芯生产线和包装线、承接OEM/ODM电池加工(贴标/套标/组合等包装)。

鑫恒通拥有专业、优秀的开发设计队伍，始终引领世界级电源品牌潮流。在电源行业里名列前茅，已具有足够能力适应外贸、OEM和ODM加工能力，能满足客户的高质量、严要求、大批量、短周期和快节奏的要求。产品远销欧洲、美国、南美、非洲、中东等世界各地。质量上乘、服务领先、信誉良好，深受客户信赖。

鑫恒通是一家技术密集性的行业，扬弃了该行业管理的优缺点，建立起现代企业管理模式。在推行OA办公自动化、5S活动后，全面开展ISO9002认证和6σ活动的运作体系。

鑫恒通在不断进行探索，力争在10年内将公司发展成世界级的电源加工生产基地，并将成为“WALLY”及“KING”为优秀的品牌向全世界推荐。同时，本公司技术力量雄厚，设备先进，完善的管理体制及一流的配套服务，欢迎新老朋友前来指导及光临惠顾。

鑫恒通诚邀海内外朋友一起携手合作，欢迎客户到我司参观指导，愿我们共同努力，最终力争为您实现三优：优质、优价、优服务！





惠州鑫恒通能源科技有限公司

[Http://www.wallyking.com](http://www.wallyking.com)

HUIZHOU WALLYKING BATTERY CO., LTD

◆ Introduce


Huizhou wallyking battery Co., Ltd is a professional battery company of design, development, production and sale, Which has international advanced one-time alkaline, carbon, manganese lithium and the secondary batteries of rechargeable nickel-metal hydride and nickel cadmium batteries auto battery production line and packaging line to take over OEM and ODM battery processing (labeling / seting / combination, packing and so on).

Wallyking has a professional and excellent design team, Which are always leading the trend of world-class and have been the top one in the power industry. The company has the ability to adapt to foreign trade and the process of OEM and ODM. It can meet the needs of customers of fine quality, High-volume, Fast-paced and short-cycle time, Also the products have a good market in europe, USA, South America, Africa, The Middle East, And all parts of the world. Our products are well trusted by customers because of the fine quality, Service and reputation.

Wallyking is a technology-intensive industry and develops strengths and discards weaknesses in this industry and has established a modern management. After the office automation, SS activities, We have carried out a comprehensive ISO9002 certification and the operation system of 6 σ .

Wallyking is still exploring continually and try to become a world-wide production base of processing battery within 10 years and promote our brand "WALL" & "KING" to all over the world. At the same time our company has a strong technical force, Advanced equipment, Perfect management system and the top adequate and systematic service. All of the new and old friends to our company are warmly welcome.

We would like to have a cooperation with the friends of home and abroad. Welcome your guidance. May we strive for the goals of high quality, Favourable price and better service.



碱性电池

Alkaline Battery

※相关参数 Related parameter

型号 Model	电压 Voltage (V)	规格 Specification(mm)		参照 Reference			重量 Weight(g)	每盒数量 QTY/Inner Box	每箱数量 QTY/Outer Caton	外箱尺寸 Size (cm)Outer Carton
		直径 Diameter	高度 Height	IEC	JIS	Size				
AM-1	1.5	32.3	59.0	LR20	SJI	D	145.0	6	120	36*22*14.5
AM-2	1.5	25.3	49.5	LR14	AM1	C	73.0	12	240	44*23*12
AM-3	1.5	14.0	49.0	LR6	AM2	AA	24.0	40	800	31*31*13
AM-4	1.5	11.0	44.0	LR03	AM3	AAA	11.3	60	1200	32.5*22*12
AM-5	1.5	12.0	30.0	LR1	AM4	N	9.5	50	2000	25.5*19*17.5
AM-6	1.5	8.1	42.0	LR61	AM5	AAAA	6.4	60	1800	31*18*18
6AM-6	9.0	17.0*25.0	48.0	6LR61	6AM6	6LR61	53.0	24	288	30*19*17
MS21	12.0	10.1	28.3	23A	MS21	23A	7.7	50	2000	29*22.5*14.5
MS27	12.0	7.6	28.0	27A	MS27	27A	4.7	50	2000	22.5*17*14





碳性电池

Carbon Battery

※相关参数 Related parameter

型号 Model	电压 Voltage (V)	规格 Specification(mm)		参照 Reference			重量 Weight(g)	每盒数量 QTY/Inner Box	每箱数量 QTY/Outer Carton	外箱尺寸 Size (cm/Outer Carton)
		直径 Diameter	高度 Height	IEC	JIS	Size				
UM-1	1.5V	34.2	61.5	R20	R20	D	74.55g	12	288	36*22*14.5
UM-3	1.5V	14.5	50.5	R6	R6	AA	18.4g	60	1440	35*29.5*17
UM-4	1.5V	10.5	44.5	R03	R03	AAA	9.5g	60	2400	29.5*26.5*20.5
UM-6	9.0V	17.5*26.5	48.5	6F22	6F22	6F22	37.0g	10	600	28*26.7*22.6

镍氢电池

NI-MH Cylindrical Rechargeable Battery

※相关参数 Related parameter

型号 Model	电压 Voltage (V)	容量 Capacity (mAh)	规格 Specification(mm)		快速充电 Quick charge		重量 Weight(g)
			直径 Diameter	高度 Height	电流 Current(mA)	时间 Time(h)	
NI-MH AAA 600	1.2	600	10.5	43.5	60	15	11.8
NI-MH AAA 850	1.2	850	10.5	43.5	85	15	15.0
NI-MH AA 1600	1.2	1600	14.3	50.0	160	15	27.0
NI-MH AA 1800	1.2	1800	14.3	50.0	180	15	29.0
NI-MH AA 2000	1.2	2000	14.3	50.0	200	15	30.0
NI-MH AA 2400	1.2	2400	14.3	50.0	240	15	32.0
NI-MH A 2200	1.2	2200	17.0	50.0	220	15	40.5
NI-MH SC 4000	1.2	4000	22.5	44.0	400	15	70.0
NI-MH C 4500	1.2	4500	26.0	50.0	450	15	84.0
NI-MH D 10000	1.2	10000	32.5	60.0	4000	15	171.0



镍镉电池

NI-CD Cylindrical Rechargeable Battery

※相关参数 Related parameter

型号 Model	电压 Voltage (V)	容量 Capacity (mAh)	规格 Specification(mm)		快速充电 Quick charge		重量 Weight(g)
			直径 Diameter	高度 Height	电流 Current(mA)	时间 Time(h)	
NI-CD AAA 350	1.2	350	10.5	44.0	35	1.5	10.0
NI-CD 23 AA 300	1.2	300	14.3	29.0	30	1.5	12.0
NI-CDA A 700	1.2	600	14.3	50.0	70	1.5	23.0
NI-CD AA 850	1.2	850	14.3	50.0	85	1.5	24.0
NI-CD A 1400	1.2	1400	17.0	50.0	140	1.5	31.0
NI-CD SC 1800	1.2	1800	22.0	43.0	180	1.5	49.0
NI-CD C 2500	1.2	2500	25.2	49.5	250	1.5	76.0
NI-CD D 7000	1.2	7000	32.2	92.3	700	1.5	220.0





锂锰电池

Lithium Manganese Battery

※相关参数 Related parameter

型号 Model	电压 Voltage (V)	容量 Capacity (mAh)	参照 Reference		规格 Specification(mm)		重量 Weight(g)
			IEC	GB	直径 Diameter	高度 Height	
CR2	3.0	800	CR15270	CR2	15.0	27.0	15.0
CR123A	3.0	1350	CR17335	CR123A	17.0	34.5	17.0
CR2032	3.0	210	CR2032	CR2032	20.0	3.2	3.0
CR2450	3.0	540	Cr2450	Cr2450	24.5	5.5	6.2

组合电池 (镍氢、镍镉、碱性和锂锰)

Combines The Battery

Ni-mh、hi-cd、alkaline And Lithium Batteries Packing

