

SPECIFICATIONS

Mechanical

Contact Retention Force: 0.21Kg(0.44Lb)min.
Durability: 100 Cycles

Electrical

Voltage Rating: 120VAC
Current Rating: 0.5A
Contact Resistance: 35mW max.
Dielectrical Withstanding Voltage: 300VAC
Insulation Resistance: 500MW min.


Physical

Housing: LCP, UL 94-0, Ivory White
Contact: Phosphor Bronze
Plating: See "ORDERING INFORMATION"
Operating Temperature: -55° to +85





SFP CONNECTOR

3S Series

SFP(Small Form-Factor Pluggable) New Standard 1x1 Type,0.8mm pitch



DRAWING

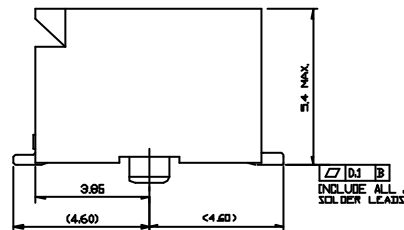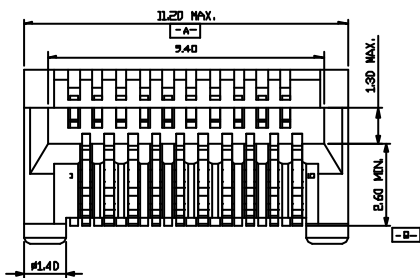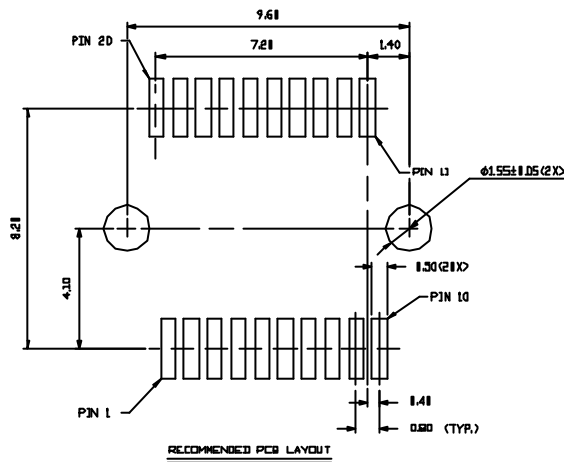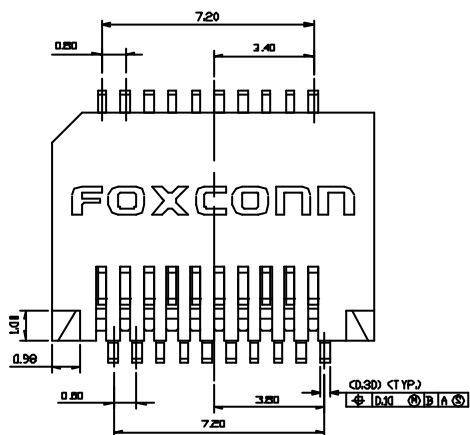

ORDERING INFORMATION

PRODUCT NO.: 3 S 1 * * * 2 3 - 0 1 1 - 7 F

Pos. No.

020:20 Pos. P=10,(SFP)
 030:30 Pos. P=15,(XFP)

Contact Area Plating

3: 30µ" Gold

Lead Free Code

None: Tin/Lead
 F: Lead Free

Package

7: Tape & Reel