

SPECIFICATIONS

Mechanical

Mating Force: 3.00Kg (6.61Lb) max.
Unmating Force: 0.30~3.00Kg (0.66~6.61Lb)
Durability: 5000 Cycles

Electrical


Voltage Rating: 16V
Current Rating: 3A
Contact Resistance: 30mW max.
Dielectric Withstanding Voltage: 250V AC/1min min.
Insulation Resistance: 100MW min.

Physical


Housing & Spacer: Hi-Temp. Thermoplastic, UL 94V-0 rated
Contact: Copper alloy
Plating: See "ORDERING INFORMATION"
Operating Temperature: -20 to +70

DC Power Jack Connector

JPD Series
Right Angle, T/H
5 Pos.



DRAWING

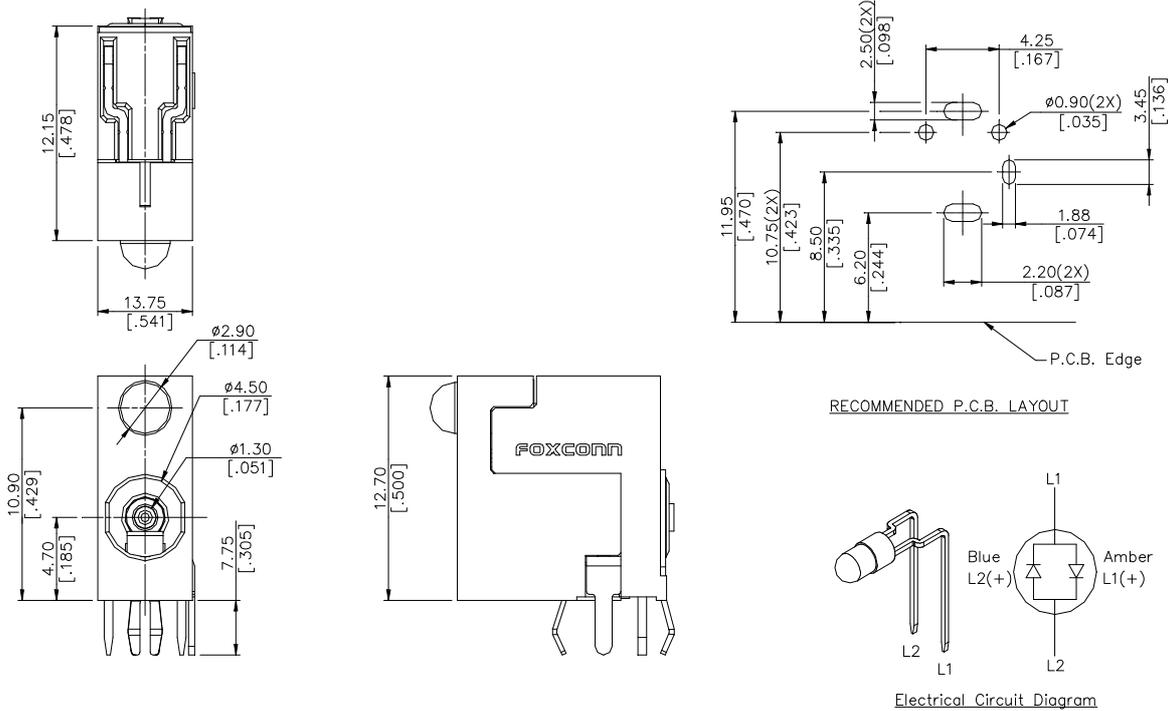

ORDERING INFORMATION

PRODUCT NO.: JP D 1 0 5 * - 4 0L - 4 F

