


Features


- 4~6.3 ϕ , 105°C, 1,000 hours assured
- Vertical chip type miniaturized for 5.5mm high capacitor
- Designed for surface mounting on high density PC board.
- RoHS Compliance

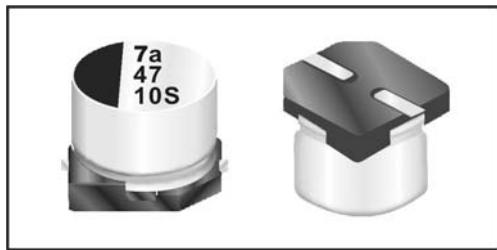

SPECIFICATIONS

Items	Performance																											
Operating Temperature Range	$-55^{\circ}\text{C} \sim +105^{\circ}\text{C}$																											
Capacitance Tolerance	$\pm 20\%$ (at 120Hz, 20°C)																											
Leakage Current (at 20°C)	I = 0.01CV or $3 (\mu\text{A})$ whichever is greater (after 2 minutes) Where, C = rated capacitance in μF . V = rated DC working voltage in V.																											
Dissipation Factor ($\tan \delta$ at 120Hz, 20°C)	<table border="1"> <thead> <tr> <th>Rated Voltage</th> <th>6.3</th> <th>10</th> <th>16</th> <th>25</th> <th>35</th> <th>50</th> </tr> </thead> <tbody> <tr> <td>$\tan \delta$ (max)</td> <td>0.30</td> <td>0.26</td> <td>0.22</td> <td>0.16</td> <td>0.13</td> <td>0.12</td> </tr> </tbody> </table>							Rated Voltage	6.3	10	16	25	35	50	$\tan \delta$ (max)	0.30	0.26	0.22	0.16	0.13	0.12							
Rated Voltage	6.3	10	16	25	35	50																						
$\tan \delta$ (max)	0.30	0.26	0.22	0.16	0.13	0.12																						
Low Temperature Characteristics (at 120Hz)	<p>Impedance ratio shall not exceed the values given in the table below.</p> <table border="1"> <thead> <tr> <th>Rated Voltage</th> <th>6.3</th> <th>10</th> <th>16</th> <th>25</th> <th>35</th> <th>50</th> </tr> </thead> <tbody> <tr> <td>Impedance Ratio $Z(-25^{\circ}\text{C})/Z(+20^{\circ}\text{C})$</td> <td>4</td> <td>3</td> <td>2</td> <td>2</td> <td>2</td> <td>2</td> </tr> <tr> <td>$Z(-40^{\circ}\text{C})/Z(+20^{\circ}\text{C})$</td> <td>8</td> <td>5</td> <td>4</td> <td>3</td> <td>3</td> <td>3</td> </tr> </tbody> </table>							Rated Voltage	6.3	10	16	25	35	50	Impedance Ratio $Z(-25^{\circ}\text{C})/Z(+20^{\circ}\text{C})$	4	3	2	2	2	2	$Z(-40^{\circ}\text{C})/Z(+20^{\circ}\text{C})$	8	5	4	3	3	3
Rated Voltage	6.3	10	16	25	35	50																						
Impedance Ratio $Z(-25^{\circ}\text{C})/Z(+20^{\circ}\text{C})$	4	3	2	2	2	2																						
$Z(-40^{\circ}\text{C})/Z(+20^{\circ}\text{C})$	8	5	4	3	3	3																						
Load Life Test	<table border="1"> <thead> <tr> <th>Test Time</th> <th>1,000 Hrs</th> </tr> </thead> <tbody> <tr> <td>Capacitance Change</td> <td>Within $\pm 20\%$ of initial value</td> </tr> <tr> <td>Dissipation Factor</td> <td>Less than 200% of specified value</td> </tr> <tr> <td>Leakage Current</td> <td>Within specified value</td> </tr> </tbody> </table> <p>* The above specifications shall be satisfied when the capacitors are restored to 20°C after the rated voltage applied for 1,000 hrs at 105°C.</p>							Test Time	1,000 Hrs	Capacitance Change	Within $\pm 20\%$ of initial value	Dissipation Factor	Less than 200% of specified value	Leakage Current	Within specified value													
Test Time	1,000 Hrs																											
Capacitance Change	Within $\pm 20\%$ of initial value																											
Dissipation Factor	Less than 200% of specified value																											
Leakage Current	Within specified value																											
Shelf Life Test	Test time: 1,000 hrs; other items are the same as those for the load life test.																											
Ripple Current & Frequency Multipliers	<table border="1"> <thead> <tr> <th>Freq.(Hz) V.DC(V)</th> <th>50</th> <th>120</th> <th>1K</th> <th>10K up</th> </tr> </thead> <tbody> <tr> <td>Under 16</td> <td>0.8</td> <td>1.0</td> <td>1.15</td> <td>1.25</td> </tr> <tr> <td>25 ~ 35</td> <td>0.8</td> <td>1.0</td> <td>1.25</td> <td>1.40</td> </tr> <tr> <td>50</td> <td>0.8</td> <td>1.0</td> <td>1.35</td> <td>1.50</td> </tr> </tbody> </table>							Freq.(Hz) V.DC(V)	50	120	1K	10K up	Under 16	0.8	1.0	1.15	1.25	25 ~ 35	0.8	1.0	1.25	1.40	50	0.8	1.0	1.35	1.50	
Freq.(Hz) V.DC(V)	50	120	1K	10K up																								
Under 16	0.8	1.0	1.15	1.25																								
25 ~ 35	0.8	1.0	1.25	1.40																								
50	0.8	1.0	1.35	1.50																								
Other Standards	JIS C 5101-1, -18																											

DIAGRAM OF DIMENSIONS

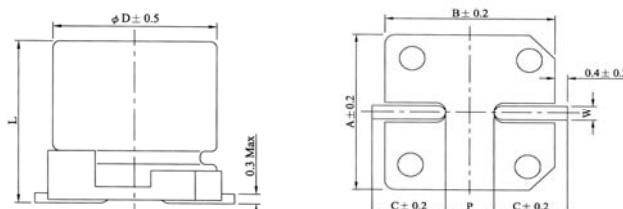

LEAD SPACING AND DIAMETER							Unit: mm
ϕD	L	A	B	C	W	P ± 0.2	
4	5.3 ± 0.2	4.3	4.3	2.0	0.5 to 0.8	1.0	
5	5.3 ± 0.2	5.3	5.3	2.3	0.5 to 0.8	1.5	
6.3	5.3 ± 0.2	6.6	6.6	2.7	0.5 to 0.8	2.0	

Dimension: $\phi D \times L(\text{mm})$

Ripple Current: mA/rms at 120 Hz, 105°C

DIMENSION & PERMISSIBLE RIPPLE CURRENT

μF	V.DC Contents	6.3V (0J)		10V (1A)		16V (1C)		25V (1E)		35V (1V)		50V (1H)		
		$\phi D \times L$	mA											
0.1	0R1												4 \times 5.3	2
0.22	R22												4 \times 5.3	3
0.33	R33												4 \times 5.3	4
0.47	R47												4 \times 5.3	5
1	010												4 \times 5.3	7
2.2	2R2												4 \times 5.3	10
3.3	3R3												4 \times 5.3	12
4.7	4R7												5 \times 5.3	17
10	100												6.3 \times 5.3	26
22	220												6.3 \times 5.3	51
33	330													
47	470													
100	101													