深圳市宏聚电子有限公司

HONGJU(CHENZHEN)ELECTRONIC CO.,LTD

R





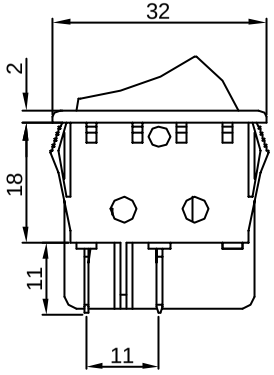

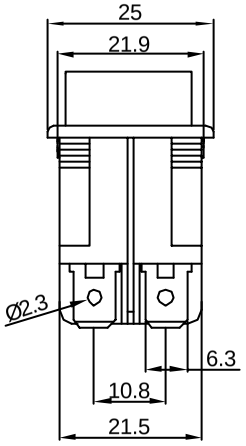

Rating: 16A 125V AC (UL CUL)
16A 250V AC (UL CUL VDE CE CB CQC)
Contact Resistance: 20m Ω (Max)
Insulation Resistance: DC 500V 100M Ω (Min)
Dielectric Strength: AC1500V 1 minute
Dlectrical life: 10,000 cycles
Operating Temperature: 0℃~85℃
Safety Approval: RoHS

CUT-OUT



	X	Y
0.75~1.25	30.0+0.1	22.0+0.1
1.25~2.00	30.2+0.1	22.0+0.1
2.00~3.00	30.4+0.1	22.0+0.1

SWITCHING CIRCUIT



MATERIAL:

Body:Nylon66,UL rated:94V-2 min
Actuator:PC,UL rated:94V-2 min
Terminal:Brass,silver or tin plated

Marking	x	0	1	2	3	4	5	7	8	9	A
	柄	None		ON OFF				Front/ 前进 Back/ 后退	Front Back	强 劲 柔 和	

修 正 REVISION	说 明 DESCRIPTION	核 准 APPROVAL BY	公 差 TOLEANCES	.X± 0.3 .XX± 0.15	角度 ANGLE 1°	单位 DIMENSION UNIT mm.			
			绘 图 DRAWN BY	李双	设 计 DESIGNED BY	李双	比 例 尺 SCALE	1:1	品 名 TITLE	图 号 DRAWING NO	材 质 MATERAL	处 理 FINISH
			核 对 CHECKED BY	李新超	核 准 APPROVED BY	李新超	日 期 DATE	2006 08 17	R-210-CXL-BR			