


Time-Current Characteristics
電流-時間曲線圖

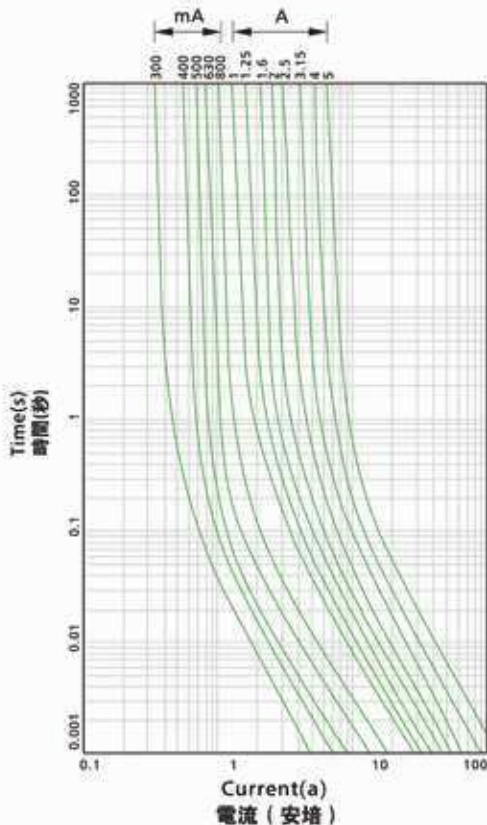

目錄編號 Catalog No.	額定電流 Ampere Rating	額定電壓 Voltage Rating	熔化熱能 I ² T Melting Integral (A ² .S)
PTU0100A/B	100mA	250V/125V	0.0015
PTU0125A/B	125mA	250V/125V	0.0025
PTU0160A/B	160mA	250V/125V	0.0042
PTU0200A/B	200mA	250V/125V	0.0065
PTU0250A/B	250mA	250V/125V	0.010
PTU0300A/B	300mA	250V/125V	0.018
PTU0315A/B	315mA	250V/125V	0.020
PTU0350A/B	350mA	250V/125V	0.025
PTU0400A/B	400mA	250V/125V	0.035
PTU0500A/B	500mA	250V/125V	0.060
PTU0630A/B	630mA	250V/125V	0.150
PTU0750A/B	750mA	250V/125V	0.350
PTU0800A/B	800mA	250V/125V	0.4
PTU1100A/B	1A	250V/125V	0.8
PTU1125A/B	1.25A	250V/125V	1.3
PTU1150A/B	1.5A	250V/125V	1.6
PTU1160A/B	1.6A	250V/125V	2.0
PTU1200A/B	2A	250V/125V	2.5
PTU1250A/B	2.5A	250V/125V	3.7
PTU1300A/B	3A	250V/125V	4.3
PTU1315A/B	3.15A	250V/125V	5.8
PTU1350A/B	3.5A	250V/125V	7.2
PTU1400A/B	4A	250V/125V	11
PTU1500A/B	5A	250V/125V	17

目錄編號: Catalog No. A:250V B:125V

認證 Approvals	電流範圍 Ampere Range	認證號 Certificate No.
UL	250mA - 5.0A	E340427
c UL	250mA - 5.0A	E340427

額定分斷能力:

Interrupting Rating:
50 Amperes at 125V AC
50 Amperes at 250V AC

測試標準:

Testing Standard: UL248-14

電氣特性 Electrical Characteristics:

額定電流的% % of Ampere Rating	熔斷時間 Opening Time
100%	4 hours Min (大于4小鐘)
200%	60 sec Max (小于60秒)

Dongguan Reomax Electronics Co., Ltd.

NO.10, Group2, Datang Village, Dalingshan Town, Dongguan, Guangdong Province, 523820, P.R. China

TEL: 86-769-88030405 85634218 FAX: 86-769-85635648

http://www.reomaxfuse.com; www.ruizhoufuse.com E-mail: reomaxfuse@163.com