
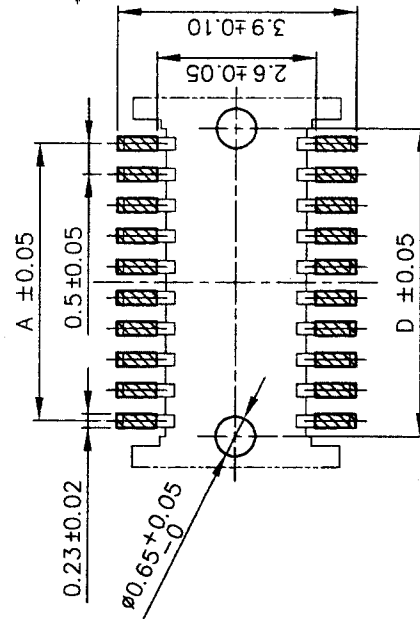
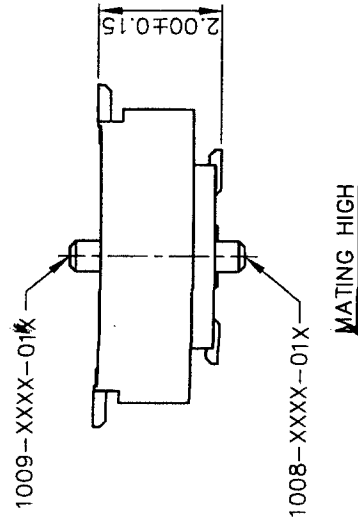
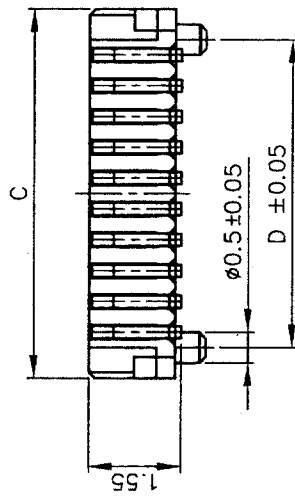




NOTES: MATERIAL & FINISH
 1. INSULATOR: HIGH-TEMP THERMOPLASTIC, UL94V-0
 COLOR: BLACK
 2. CONTACT: COPPER ALLOY
 PLATING: GOLD FLASH OR TIN OVERALL NICKEL
 UNDER PLATED
 ORDER INFORMATION: 1008 - X XX X - 01 X

PIN
 L: POST
 N: NO POST
 PACKING: E: TUBE
 R: REEL
 TYPE
 PLATING:
 G: GOLD FLASH
 T: TIN
 E: TIN(LEAD FREE)

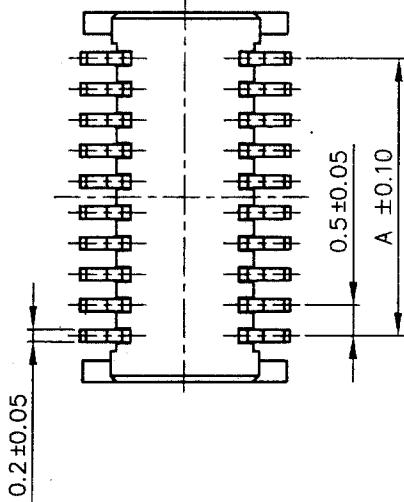

RECOMMENDED PCB LAYOUT

PIN	A	C	D
10	2.0	3.5	2.5
12	2.5	4.0	3.0
14	3.0	4.5	3.5
16	3.5	5.0	4.0
18	4.0	5.5	4.5
20	4.5	6.0	5.0
22	5.0	6.5	5.5
24	5.5	7.0	6.0
26	6.0	7.5	6.5
28	6.5	8.0	7.0
30	7.0	8.5	7.5
32	7.5	9.0	8.0
34	8.0	9.5	8.5
36	8.5	10.0	9.0
38	9.0	10.5	9.5
40	9.5	11.0	10.0
42	10.0	11.5	10.5
44	10.5	12.0	11.0
46	11.0	12.5	11.5
48	11.5	13.0	12.0
50	12.0	13.5	12.5
52	12.5	14.0	13.0
54	13.0	14.5	13.5
56	13.5	15.0	14.0
58	14.0	15.5	14.5
60	14.5	16.0	15.0
70	17.0	18.5	17.5
80	19.5	21.0	20.0



CUSTOMER
 恩得利工業股份有限公司
 E&T ENTRY INDUSTRIAL CO., LTD.

GENERAL TOLERANCE UNLESS OTHERWISE SPECIFIED X.X ±0.25 X.XX ±0.13 X.XXX ±0.10 ANG. ±0.30°	DRAWN ALLEN NOV-18-2004 CHECKED APPROVED SHEET	PART NO. 1008-XXXX-01X TITLE: 0.5 BOARD TO BOARD SMT V/T TYPE MALE UNIT SCALE SIZE REV MM 8:1 A4 A
SER	REVISIONS	CHK DATE