


Electrical Data:

Current rating: 1Amps
 Dielectric Withstanding Voltage: 500VAC for one minute
 Contact Resistance: < 30 mΩ
 Insulation Resistance: > 1000 MΩ
 Operating Temperature: -40°C ~ +105°C

Construction:

Insulator: Black Glass Filled Polyester
 Flammability Rating: UL 94V-0
 Contacts: Phosphor Bronze of copper alloy
 Contacts plating: Selective gold on surface contact area

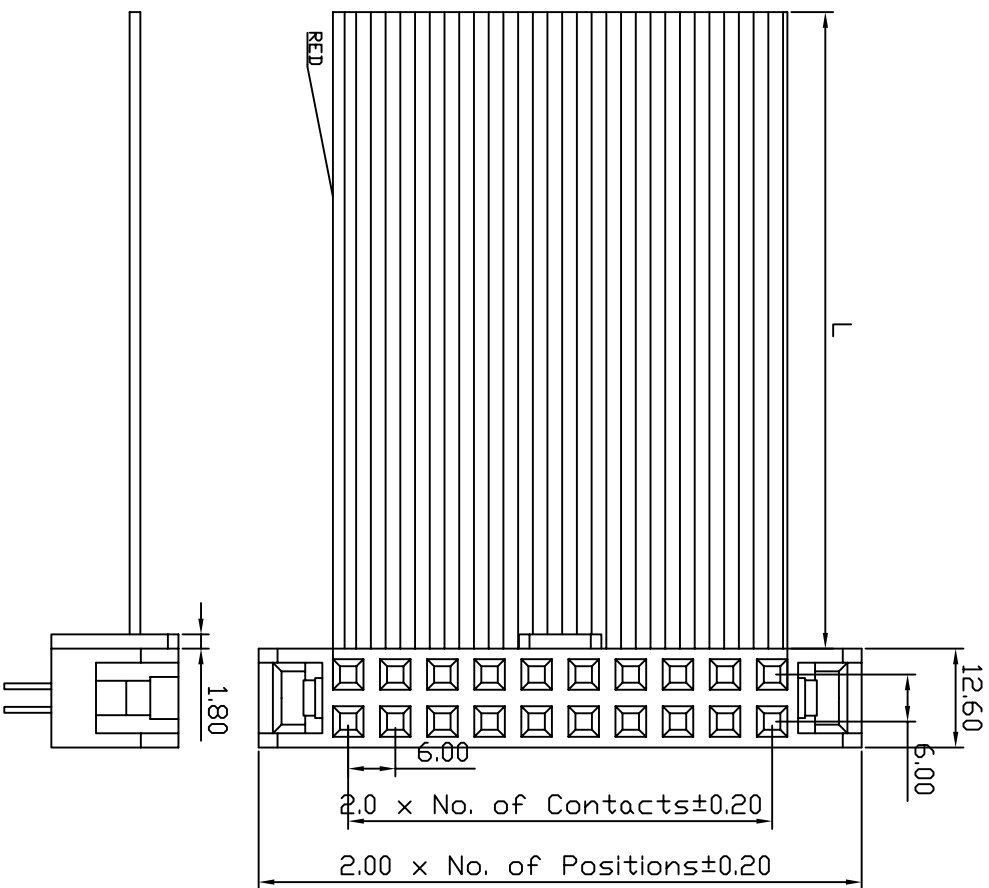

202-2 XX-0 0 1-1 0

Number of Contact: 08 ~ 50 PIN

Insulator Color:

1=Black

Insulator Material And Color

0=PPS 1=PBT 2=ICP 3=PA46

Contact Plated:

0=Tin 1=Gold Flash 2=Gold 3u"

3=Gold 5u" 4=Gold 10u" 5=Gold 15u"

6=Gold 30u"

E	Units	mm	Scale	3:1	Drawing By	Z/H*Y	Date	2011/02/15	深圳市联益康电子有限公司 Http://www.leycom.com TEL:+86-755-26078616 FAX:26070522	
D	Tolerance Unless Otherwise Specified				Reviewed By	Sandy	Date	2011/02/15	Date	2011/02/15
C					Approval By	Jon Chuo	Date	2011/02/15	Sheet	1 of 1
B									Third Angle Projection	Drawing No.
A	RELEASED								2.00mm IDC	
REV	ECN. NO.								F/Name	REV