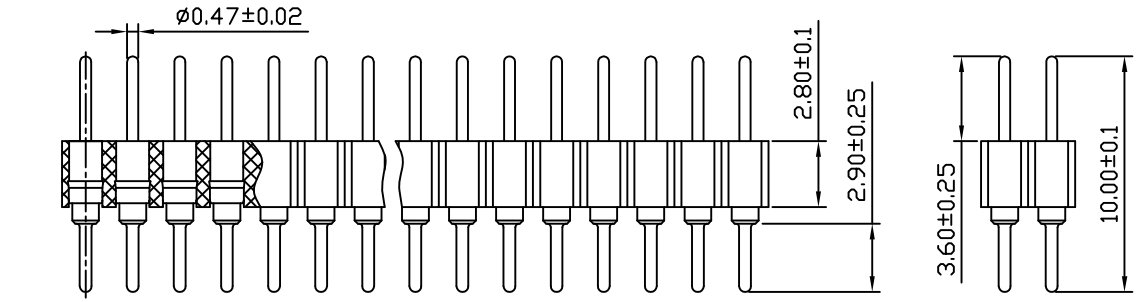

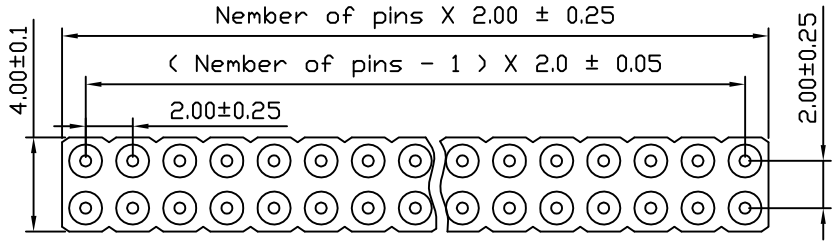

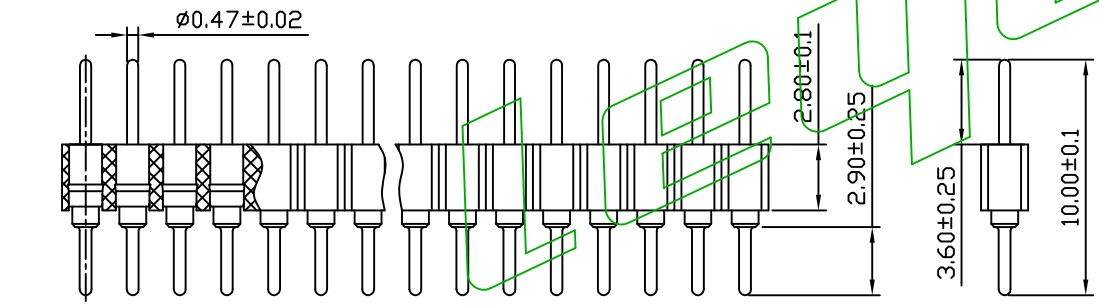

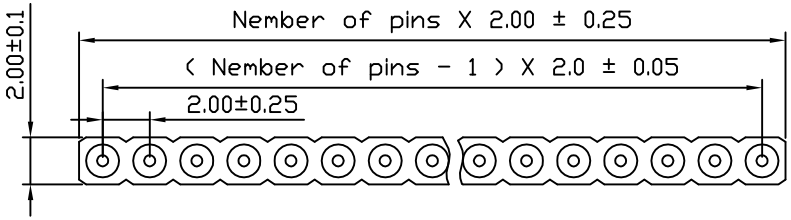

Technical Specs:

Insulator: Black glass filled polyester PPS-GF30-FR
Flammability: UL 94V-O
Contact: Brass CuZn36Pb3 (C36000)
Mechanical life: min 500 cycles
Rated current: 3 A
Contact resistance: max 20 Milliohms
Dielectric strength: min 1000 V RMS

132-X XX-S 3 1-00

Pitch:
2 = 2.00mm

No of Row:
1 = Single Row
2 = Double Row

Number of Postion:
01 ~ 80 PIN

Tail & Mounting Style:
S = Straight DIP Type

Contact Plated:
0 = Tin 200u"
1 = Gold Flash
2 = Gold 5u"
3 = Gold 15u"
4 = Gold 30u"
5 = Gold 3u"

Insulator Height:
3 = 2.80mm

Leyconn

E			Units mm Scale 3:1	Drawing By Vance Date 2004/07/12	Leyconn Http://www.leyconn.com	深圳市联益康电子有限公司 TEL:+86(755)26078616 FAX:26070522	
D			Tolerance Unless Otherwise Specified				
C				Reviewed By Sandy Date 2004/07/12	Date 2004/07/12	Title: 2.00mm PIN Connector Straight DIP Type	
B			.X ~ ±0.30		Sheet 1 of 1		
A	RELEASED	07/12/04	.XX ~ ±0.25	Approvai By Jon Chuo Date 2004/07/12	Thirt Angle Projection	Drawing No.	REV
REV	ECN.NO.	Date	.XXX ~ ±0.20			F/Name	A
			Angle ~ ± 3°				