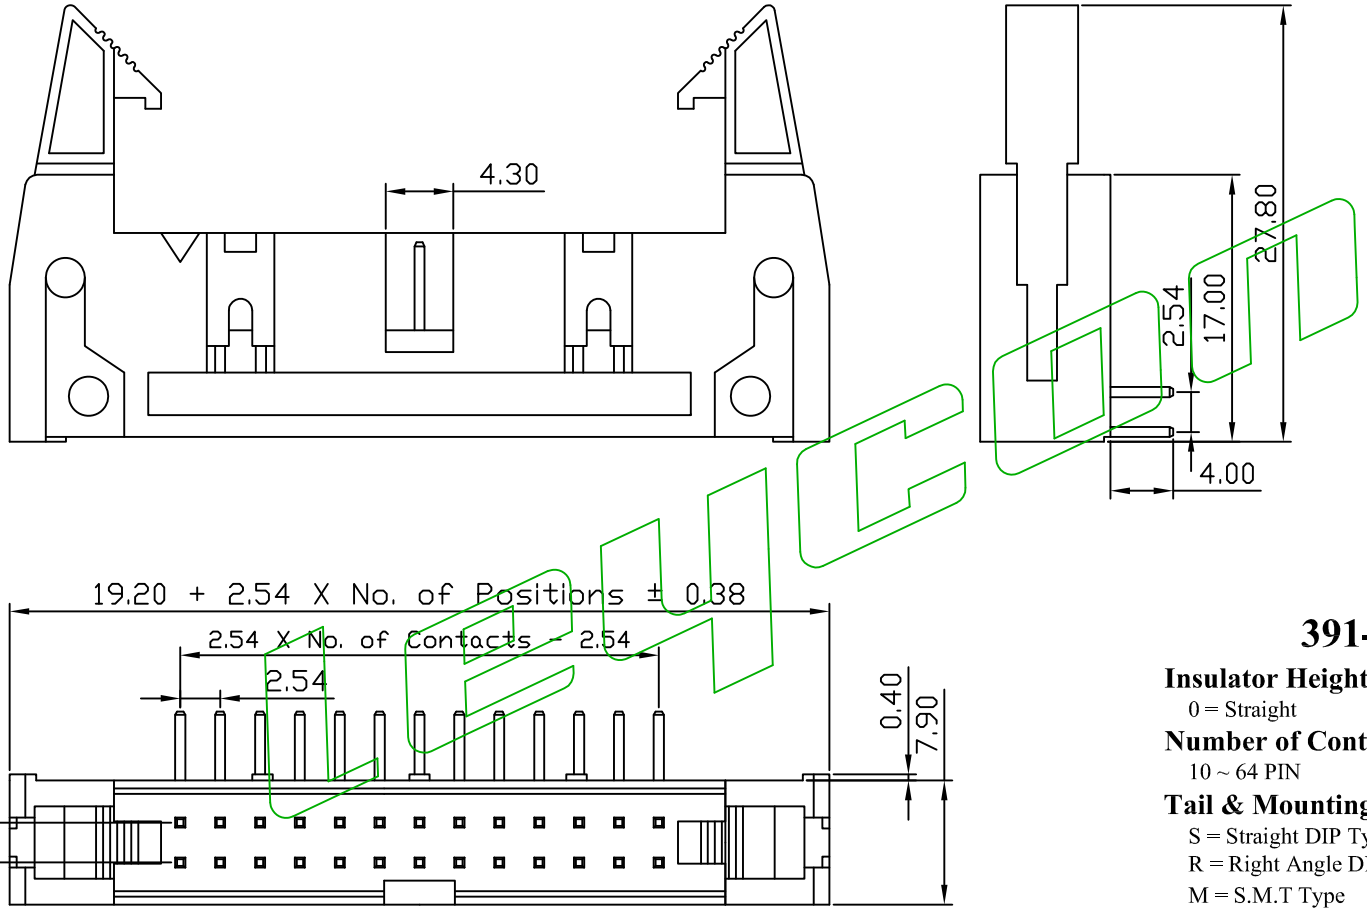

Electrical Data:

Current rating: 3Amps
Dieltric Withstanding Voltage: 1000VAC for one minute
Contact Resistance: < 20 mΩ
Insulation Resistance: > 1000 MΩ
Operating Temperature: -40℃ ~ +105℃

Construction:

Insulator: Black Glass Filled Polyester
Flammalility Rating: UL 94V-0
Contacts: Phosphor Bronze of copper alloy
Contacts plating: Selective gold on surface contact area

391-0 XX-R 1 X-1 0

Insulator Height:
0 = Straight

Number of Contact:
10 ~ 64 PIN

Tail & Mounting Style:
S = Straight DIP Type
R = Right Angle DIP Type
M = S.M.T Type

Insulator Color:
1=Black 2=Grey 3=White 4=Blue
5=Red 6=Yellow

Insulator Material And Color
0=PPS 1=PBT 2=LCP 3=PA46

Contact Plated:
0=Tin 1=Gold Flash 2=Gold 3u"
3=Gold 5u" 4=Gold 10u" 5=Gold 15u"
6=Gold 30u"

E			Units mm Scale 2:1	Drawing By Date	Leyconn 深圳市联益康电子有限公司		
D			Tolerance Unless Otherwise Specified	Vance 2004/07/12	Http://www.leyconn.com TEL:+86(755)26078616 FAX:26070522		
C			.X ~ ±0.10	Reviewed By Date	Date 2004/07/12	Title	Ejector Header Connector
B			.XX ~ ±0.05	Sandy 2004/07/12	Sheet 1 of 1		Pitch:2.54mm,Right Angle DIP Type
A	RELEASED	07/12/04	.XXX ~ ±0.02	Approvai By Date	Thirt Angle Projection	Drawing No.	REV
REV	ECN.NO.	Date	Angle ~ ± 3°	Jon Chuo 2004/07/12		F/Name	A