


PRODUCT TYPE

FOR-FB00DC0000

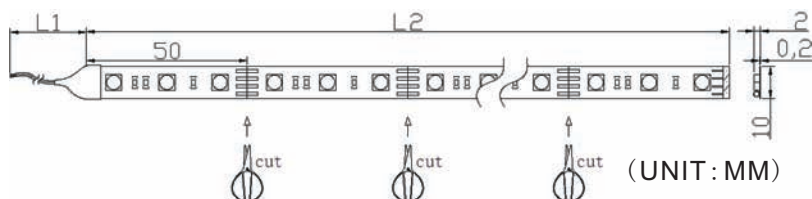

DESCRIPTION

SMD5050 Non-waterproof LED strip---- 60LED/M(DC12V) Blue

A Electronics And Optical Characteristics: Ta=25°C

Emitting Color	Forward Voltage Unit:v	Totality Luminous flux Unit:LM	Single LED Intensity Unit:mcd	Dominant Wavelength Unit:nm	Viewing Angle Unit:deg	Color Temperature Unit:K
B	12	---	4000-4500	---	120	---
Test Condition	Test Voltage: 12V		Current: 600mA±10%		Power: 7.2W	
IR max: 10 μA/per chip			VR= 3.3V/per chip			

B Absolute Maximum Ratings AT Ta=25°C

PARAMETER	MAX	UNIT
Continuous Forward Current	20	mA/per chip
Peak Forward Current (1/10 Duty Cycle 0.1ms Pulse Width)	100	mA/per chip
Reverse Voltage	5	V/per chip
Operating Temperature Range	-30°C to +75°C	
Storage Temperature/Humidity Range	-40°C to +100°C (/40%to70%)	

Lead Solder Temperature 1.6mmBelow Package 260°C For 5 seconds


Usage:widely use, building decoration lighting, park entertainment, the theater corridor and stair lighting, concealed lighting, concave round open tent, ambry and counter as lighting.

Advantage:Soft, curl; shorten cut and elongation; In flexible plastic, insulation waterproof properties is good, safty in use; weather fastness; Not easy rupture, long life and easy modelling such as making graphics text.

PACKAGE


FOR-FB00DC0000

Package Dimensions (Unit:mm) :

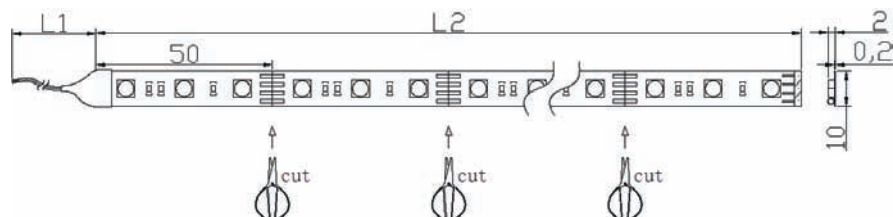


- Packaging : static PE bag (1 dish)
- Net weight : 80. 2g
- Gross weight : 124. 4g
- Box size : 190*202*200mm
- Carton size : 395*217*420mm
- Packaging Quantity : 40pcs

1 the/dish
(5 meters / dish)

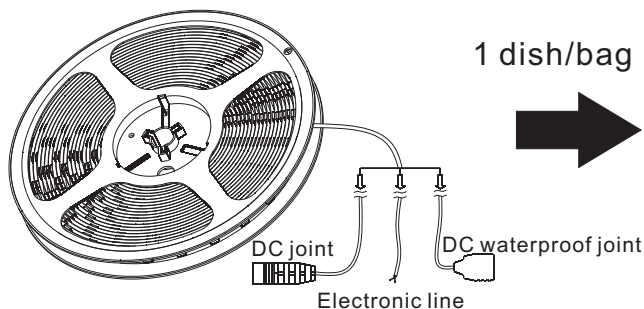


plastic platesc (φ 178*T15. 5MM)

1 dish/bag

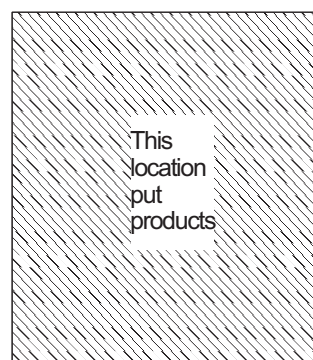


static PE bag

10 bags/box

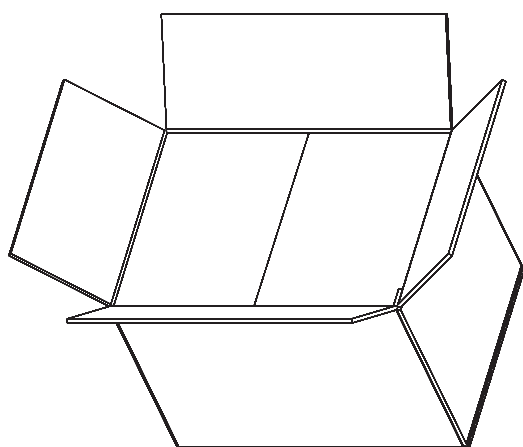

Carton 1pcs(L395*W217*H420MM)

4boxes/carton



box size(L190*W202*H200MM)

CONTACT US