


PRODUCT TYPE

FOR-EW60CD0001

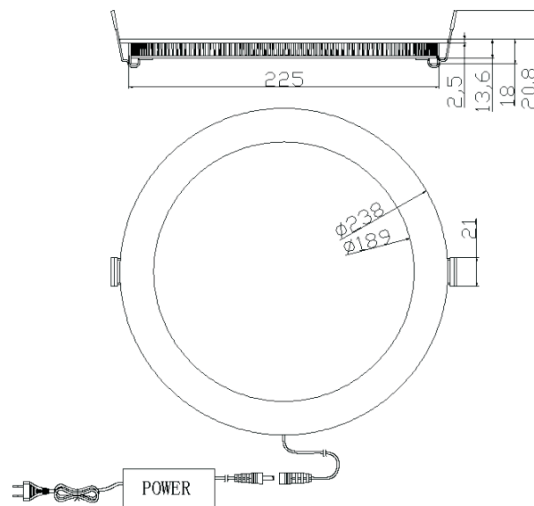

(UNIT: MM)

DESCRIPTION

Panel lights 3528SMD * 154PCS AC100-240V White 6000K Round

A Electronics And Optical Characteristics: Ta=25°C

Emitting Color	Forward Voltage Unit:v	Totality Luminous flux Unit:LM	Single LED Intensity Unit:mcd	Dominant Wavelength Unit:nm	Viewing Angle Unit:deg	Color Temperature Unit:K
NW	100-240	462	4000-4500	---	120	4000-5000
WW	100-240	445	4000-4500	---	120	2700-3500
CW	100-240	462	4000-4500	---	120	6000-7000
Test Condition	Test Voltage: 24V		Current: 330mA±10%		Power: 7.92W	
IR max: 10 μA/per chip			VR= 3.3V/per chip			

B Absolute Maximum Ratings AT Ta=25°C

PARAMETER	MAX	UNIT
Continuous Forward Current	20	mA/per chip
Peak Forward Current (1/10 Duty Cycle 0.1ms Pulse Width)	100	mA/per chip
Reverse Voltage	5	V/per chip
Operating Temperature Range	-30°C to +75°C	
Storage Temperature/Humidity Range	-40°C to +100°C (/40%to70%)	

Lead Solder Temperature 1.6mmBelow Package 260°C For 5 seconds


Usage::Instead of traditional spotlight, widely used in indoor decoration lighting and outdoor decorative lighting, such as villa, hotel, conference room, Exhibition Hall, stores, telephone booth.

Advantage:soft brightness, color fidelity, aesthetically beautiful and safe use of neatly packaged with DC Power, stable performance, no infrared light!

PACKAGE

FOR-EW60CD0001

Package Dimensions (Unit:mm) :

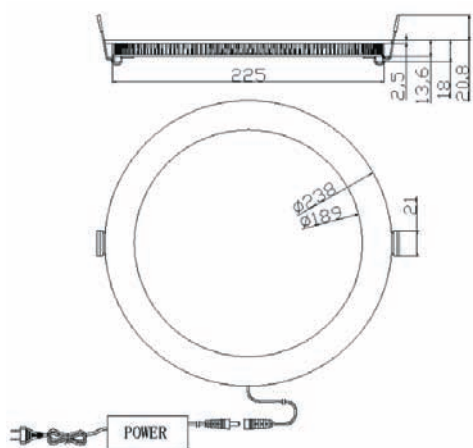

- Packaging: #box(1 pack)
- Net weight: 811g
- Gross weight: ***g
- Box size: L355*W56*H290mm
- Carton size: L300*W370*H310mm
- Packaging Quantity: 5set

1 pcs panel lights/
Pearl cotton bags




Pearl cotton bags
(Outfit panel lights)

1PCS Power supply/
Plastic bags




Plastic bags
(Outfit power supply)

1set/box

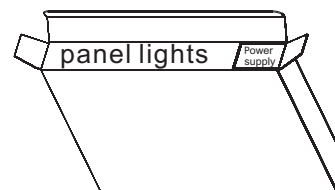


Box(L355*W56*H290MM)

5 boxes



5boxes/carton

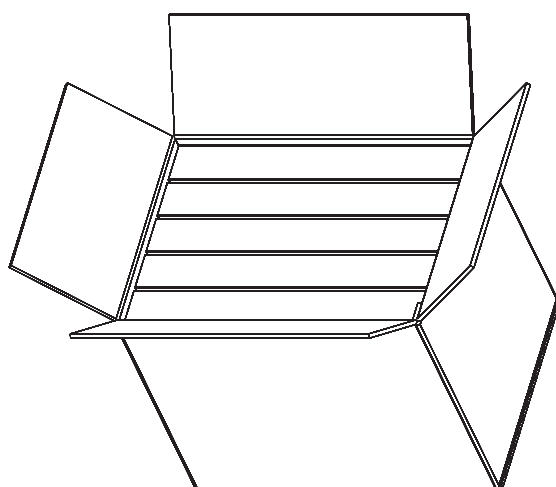

Carton1PCS(L370*W300*H310MM)

CONTACT US


<http://www.forever-in-china.com>

Tel:86 0755 29890666/29890977/76/75


Add:Building 7, Shangcun Xufa Technology Zone, Gongming Town, Baoan District, Shenzhen, Guangdong, China.

Installation Instruction:


Step1: do up the A & B Spring buttons on the panel;

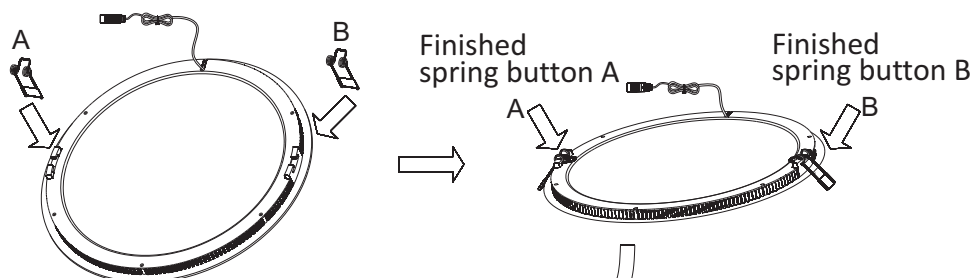


Step2: pass the panel DC wire through the hole of the ceiling, fitted the panel in the hole and do up the A & B Spring buttons on the Ceiling;

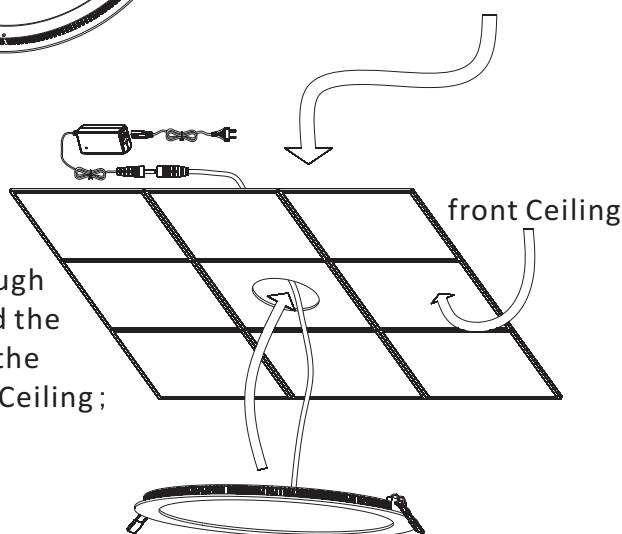

Step3: Put the power into the ceiling and turn the switch on;

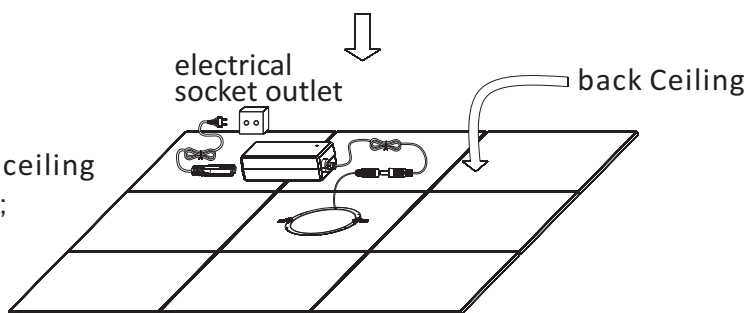

Step4: finished installation.

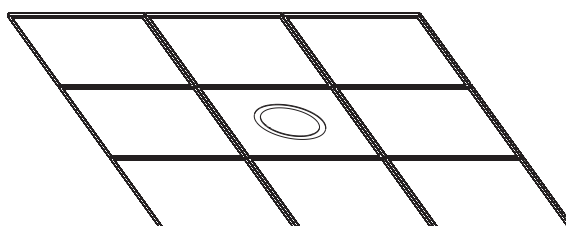

CONTACT US