
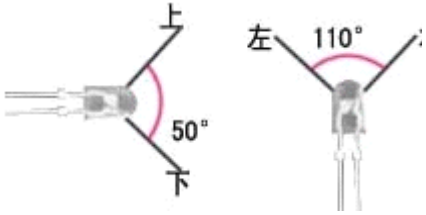







LED	LED 型号	光强	波长	发光角度
	DIP546	500mcd	623nm	
	DIP546	1400mcd	525nm	
	DIP546	350mcd	470nm	




尺寸 (W×H)	256mm×256mm		
模组类型	灯驱分离		
点间距 (mm)	16mm	像素点 (点数/ m ²)	3906点数/ m ²
分辨率 (W×H)	16点×16点	模组像素点数	256点

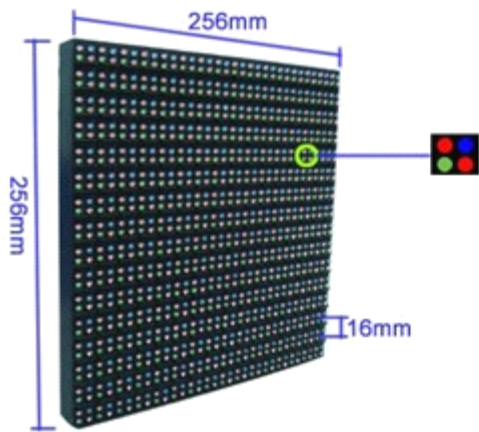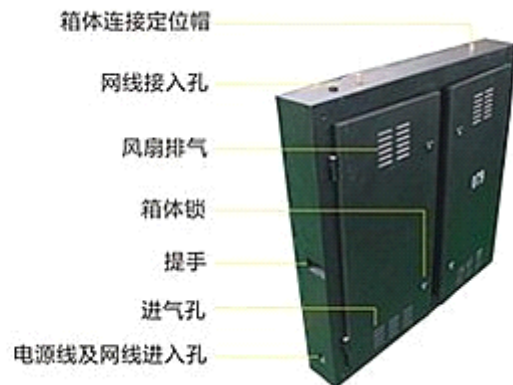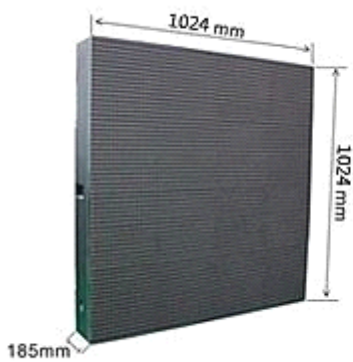

尺寸 (W×H×H)	1024mm×1024mm	模组个数	16个
分辨率	64点 (W) ×64点 (H)	箱体像素点数	4096

重量 (kg/个)	70kg/个	面积(m ²)	1.049m ²
标准平均功率 (W/m ²)	400W/m ²	标准最大功率 (W/m ²)	950W/m ²
亮度	>5000CD		

户外 LED 显示屏流程：
Produce Flow of Outdoor LED display

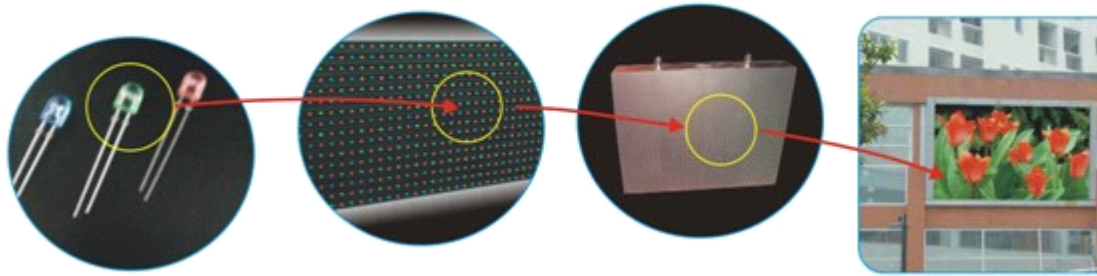

色温	6500/9300
防护等级(正面/背面)	IP65/IP54
系统工作环境湿度	10%—90% RH
系统工作环境温度	-20℃ ~+60℃
最佳观看距离	12m-80m
颜色种类	10.7亿
灰度级别	16384
亮度控制	256级
数字处理	10比特
帧率	60HZ
显示刷新频率	>300HZ
供电方式	220V/50HZ