


中高压陶瓷电容器 (圆板型带导线)

一般 CK45 系列

RoHS指令对应产品

形状・尺寸

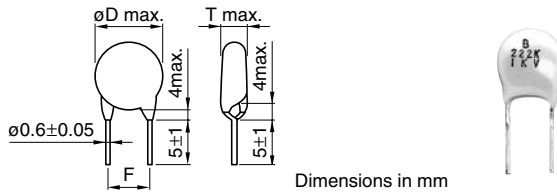

标称电容取得范围/尺寸

温度特性: B(±10%)

额定电压 Edc: 1kV

品名	标称电容 (pF)	尺寸 (mm)		
		最大 øD	最大 T	F
CK45-B3AD101KYNN to CK45-B3AD681KYNN	100*, 120, 150*	5.5	5	5±1.5
	180, 220*, 270			
	330*, 390, 470*			
	560, 680*			
CK45-B3AD821KYNN	820	6	5	5±1.5
CK45-B3AD102KYNN	1,000*	6	5	5±1.5
CK45-B3AD122KYNN	1,200	6.5	5	5±1.5
CK45-B3AD152KYNN	1,500*	7	5	5±1.5
CK45-B3AD182KYNN	1,800	7.5	5	5±1.5
CK45-B3AD222KYNN	2,200*	8.5	5	5±1.5
CK45-B3AD272KYNN	2,700	9	5	5±1.5
CK45-B3AD332KYNN	3,300*	9.5	5	5±1.5
CK45-B3AD392KYNN	3,900	10	5	5±1.5
CK45-B3AD472KYNN	4,700*	11	5	5±1.5
CK45-B3AD562KYNN	5,600	12	5	7.5±1.5
CK45-B3AD682KYNN	6,800*	13	5	7.5±1.5
CK45-B3AD822KYNN	8,200	14	5	7.5±1.5
CK45-B3AD103KYNN	10,000*	15	5	7.5±1.5

额定电压 Edc: 2kV

品名	标称电容 (pF)	尺寸 (mm)		
		最大 øD	最大 T	F
CK45-B3DD101KYNN to CK45-B3DD471KYNN	100*, 120, 150*	5.5	5	5±1.5
	180, 220*, 270			
	330*, 470*			
CK45-B3DD561KYNN	560	6	5	5±1.5
CK45-B3DD681KYNN	680*	6.5	5	5±1.5
CK45-B3DD821KYNN	820	7	5	5±1.5
CK45-B3DD102KYNN	1,000*	7.5	5	5±1.5
CK45-B3DD122KYNN	1,200	8	5	5±1.5
CK45-B3DD152KYNN	1,500*	8.5	5	5±1.5
CK45-B3DD182KYNN	1,800	9	5	5±1.5
CK45-B3DD222KYNN	2,200*	10	5	5±1.5
CK45-B3DD272KYNN	2,700	10.5	5	5±1.5
CK45-B3DD332KYNN	3,300*	11.5	5	7.5±1.5
CK45-B3DD392KYNN	3,900	12.5	5	7.5±1.5
CK45-B3DD472KYNN	4,700*	14	5	7.5±1.5

* 温度特性 B 的标准产品为 E6 系列, 作为 1kV, 2kV。

电容温度特性及电容公差的关系

温度特性	温度范围	电容公差
B(±10%)	-25 to +85°C	K(±10%)
E(+20, -55%)	-25 to +85°C	Z(+80, -20%)

额定电压 Edc: 3kV

品名	标称电容 (pF)	尺寸 (mm)		
		最大 øD	最大 T	F
CK45-B3FD101KYNN	100	5.5	6	7.5±1.5
CK45-B3FD121KYNN	120	5.5	6	7.5±1.5
CK45-B3FD151KYNN	150	5.5	6	7.5±1.5
CK45-B3FD181KYNN	180	5.5	6	7.5±1.5
CK45-B3FD221KYNN	220	5.5	6	7.5±1.5
CK45-B3FD271KYNN	270	6	6	7.5±1.5
CK45-B3FD331KYNN	330	6.5	6	7.5±1.5
CK45-B3FD391KYNN	390	6.5	6	7.5±1.5
CK45-B3FD471KYNN	470	7	6	7.5±1.5
CK45-B3FD561KYNN	560	7.5	6	7.5±1.5
CK45-B3FD681KYNN	680	8	6	7.5±1.5
CK45-B3FD821KYNN	820	8.5	6	7.5±1.5
CK45-B3FD102KYNN	1,000	9	6	7.5±1.5
CK45-B3FD122KYNN	1,200	9.5	6	7.5±1.5
CK45-B3FD152KYNN	1,500	10.5	6	7.5±1.5
CK45-B3FD182KYNN	1,800	11.5	6	7.5±1.5
CK45-B3FD222KYNN	2,200	12.5	6	7.5±1.5
CK45-B3FD272KYNN	2,700	13.5	6	7.5±1.5
CK45-B3FD332KYNN	3,300	14.5	6	7.5±1.5

● RoHS 指令的对应: 表示除了依据 EU Directive 2002/95/EC 免除的用途之外, 未使用铅, 镉, 汞, 六价铬及特定溴系难燃剂 PBB, PBD 等。

· 记载内容, 在没有予告的情况下有可能改进和变更, 请予以谅解。

标称电容取得范围/尺寸
温度特性：E(+20, -55%)
额定电压 Edc: 1kV

品名	标称电容 (pF)	尺寸 (mm)		
		最大 øD	最大 T	F
CK45-E3AD471ZYNN	470*	5.5	5	5±1.5
CK45-E3AD681ZYNN	680	5.5	5	5±1.5
CK45-E3AD102ZYNN	1,000*	5.5	5	5±1.5
CK45-E3AD152ZYNN	1,500	5.5	5	5±1.5
CK45-E3AD222ZYNN	2,200*	6.5	5	5±1.5
CK45-E3AD332ZYNN	3,300	7.5	5	5±1.5
CK45-E3AD472ZYNN	4,700*	8.5	5	5±1.5
CK45-E3AD682ZYNN	6,800	10	5	5±1.5
CK45-E3AD103ZYNN	10,000*	11.5	5	7.5±1.5

额定电压 Edc: 2kV

品名	标称电容 (pF)	尺寸 (mm)		
		最大 øD	最大 T	F
CK45-E3DD471ZYNN	470*	5.5	5	5±1.5
CK45-E3DD681ZYNN	680	5.5	5	5±1.5
CK45-E3DD102ZYNN	1,000*	6	5	5±1.5
CK45-E3DD152ZYNN	1,500	7	5	5±1.5
CK45-E3DD222ZYNN	2,200*	8	5	5±1.5
CK45-E3DD332ZYNN	3,300	9	5	5±1.5
CK45-E3DD472ZYNN	4,700*	10.5	5	5±1.5
CK45-E3DD682ZYNN	6,800	12.5	5	7.5±1.5
CK45-E3DD103ZYNN	10,000*	14.5	5	7.5±1.5

* 温度特性 E 的标准产品为 E3 系列，作为 1kV, 2kV。

额定电压 Edc: 3kV

品名	标称电容 (pF)	尺寸 (mm)		
		最大 øD	最大 T	F
CK45-E3FD471ZYNN	470	6	6	7.5±1.5
CK45-E3FD681ZYNN	680	6.5	6	7.5±1.5
CK45-E3FD102ZYNN	1,000	7.5	6	7.5±1.5
CK45-E3FD152ZYNN	1,500	8.5	6	7.5±1.5
CK45-E3FD222ZYNN	2,200	9.5	6	7.5±1.5
CK45-E3FD332ZYNN	3,300	11.5	6	7.5±1.5
CK45-E3FD472ZYNN	4,700	12.5	6	7.5±1.5
CK45-E3FD682ZYNN	6,800	15	6	7.5±1.5
CK45-E3FD103ZYNN	10,000	17.5	6	10±2

●要了解没有记载的电容量及产品说明，请向本公司询问。

· 记载内容，在没有予告的情况下有可能改进和变更，请予以谅解。