




确认此型号所有图纸 签字确认:

GENERAL TOLERANCE: ±0.2

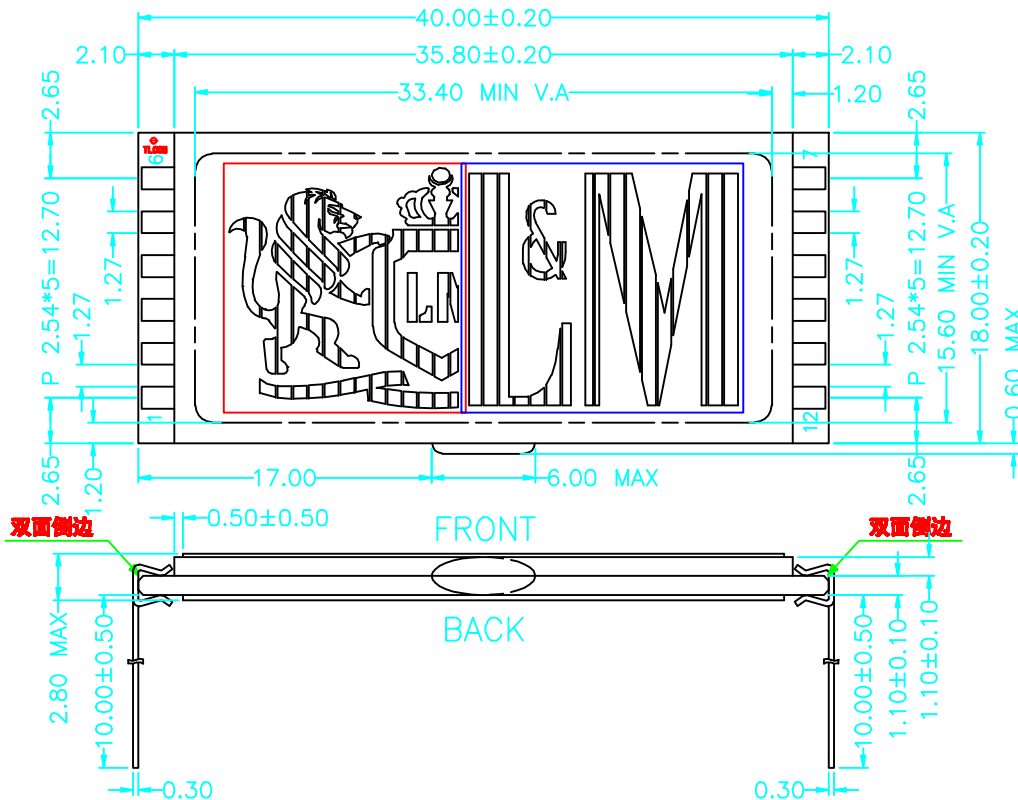

SPECIFICATIONS

FRONT POLARIZER : TRANSMISSIVE  
 BACK POLARIZER : TRANSMISSIVE  
 STORAGE TEMP : -10°C TO +60°C  
 OPERATING TEMP : 0°C TO +50°C  
 VIEWING DIRECTION : 12 O'CLOCK  
 DRIVE CONDITION : 1/4D 1/3B, 3.0V  
 DISPLAY MODE : TN, NEGATIVE MODE  
 CONNECTOR: PIN  
 CUSTOMER P/N : 509110H

SHEET: 1 OF 4		 <b>松本国际股份有限公司</b> <b>SOOBOO INTERNATIONAL CO., LTD</b>	
GENERAL TOL: ±0.20 MM	UNITS MM		
CUS NO:	MODULE NUMBER:		TEL:0755-33503277
DRAW BY: ZXM	SRX0261-TP0		FAX:0755-29161639
CHK BY: LIQIN	DO NOT SCALE THIS DRAWING.	PROJECTION	DATE: 13-AUG-2011
APP BY: 198			