
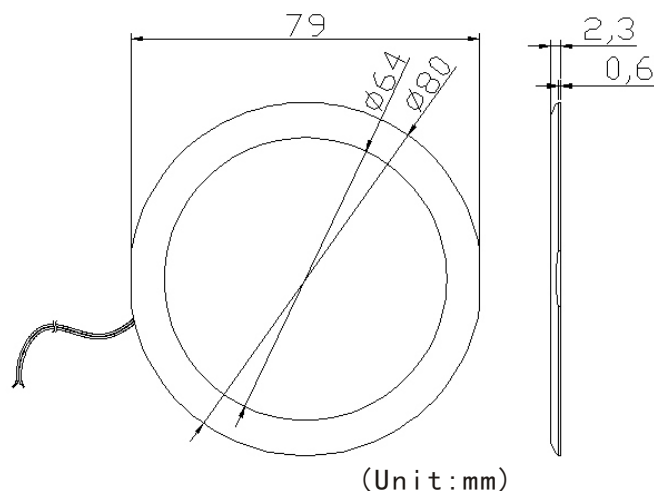


PRODUCT TYPE

FOR-G301300B243CP12-XXX

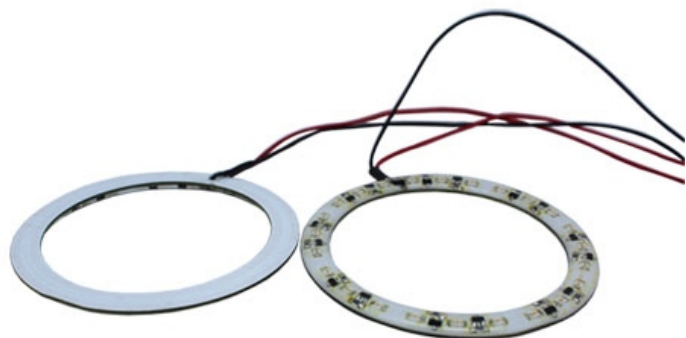

DESCRIPTION

Angel Eyes 3014SMD * 24PCS 12V Blue

A Electronics And Optical Characteristics: Ta=25°C

Emitting Color	Forward Voltage Unit:v	Totality Luminous flux Unit:LM	Single LED Intensity Unit:mcd	Dominant Wavelength Unit:nm	Viewing Angle Unit:deg	Color Temperature Unit:K
B	12	---	1800-2500	465-475	120	---
Test Condition	Test Voltage: 12V Current: 120mA±10%				Power: 1.44 W	
IR max: 10 μ A/per chip			VR= 5V/per chip			


B Absolute Maximum Ratings AT Ta=25°C

PARAMETER	MAX	UNIT
Continuous Forward Current	20	mA /per chip
Peak Forward Current (1/10 Duty Cycle 0.1ms Pulse Width)	100	mA /per chip
Reverse Voltage	5	V /per chip
Operating Temperature Range	-30°C to +75°C	
Storage Temperature/Humidity Range	-40°C to +100°C (/40%to70%)	
Lead Solder Temperature 1.6mmBelow Package 260°C For 5 seconds		
Usage: Backlight, indoor decorative lighting, display cabinet etc		
Advantage:Insulation, good waterproof; anti-seismic, impact resistance, no radiation, safe and stable, reliable, good heat dissipation, long life; compact, does look, easy installation.		

PACKAGE

FOR-G301300B243CP12-XXX

Package Dimensions (Unit:mm) :

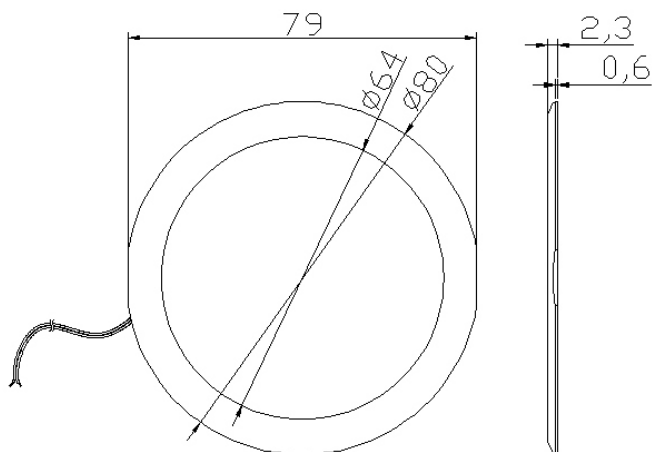


- Packaging : static PE bag
- Net weight : 8. 6g
- Gross weight : 14g
- Box size : 210*150*92mm
- Carton size : 440*320*310mm
- Packaging Quantity : 240pcs


1PCS/static
PE bag



20static PE bag / box



box size(L210*W150*H92MM)

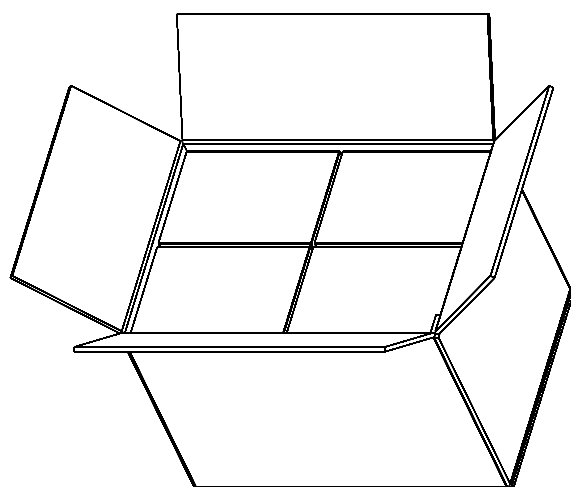


Carton(L440*W320*H310MM)



12 boxes

12 boxes/carton

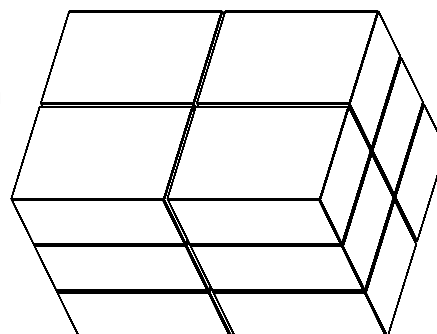

CONTACT US

<http://www.forever-in-china.com>

Tel:86 0755 29890666/29890977/76/75

Add:Building 7, Shangcun Xufa Technology Zone, Gongming Town, Baoan District, Shenzhen, Guangdong, China.