



JQX-115F



JQX-115F



触点参数

触点形式	1Z、1H、1D	2Z 2H 2D
接触电阻	≤100mΩ (1A 6VDC)	
触点材料	AgCdO AgSnO ₂	
触点负载 (阻性)	16A 250VAC/30VDC	8A 250VAC/30VDC


性能参数

绝缘电阻	≥1000MΩ (500VDC)
介质耐压	线圈与触点间 ≥5000VAC 1min
	断开触点间 ≥1000VAC 1min
吸合/释放时间	触点组间 ≥2500VAC 1min
	≤15ms/5ms
引出端方式	线路板安装

线圈参数

额定线圈功率	0.53W
--------	-------

PCB 插座

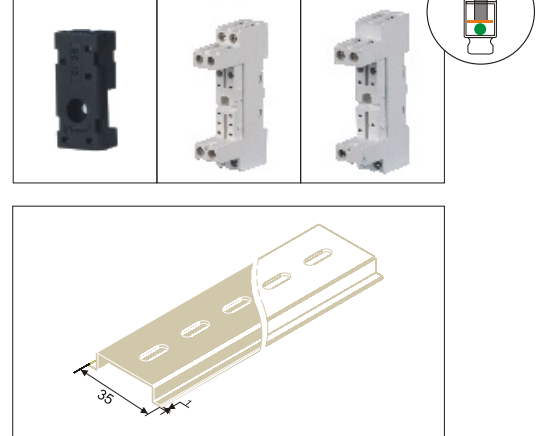


线圈规格表


额定电压	吸合电压	释放电压	线圈电阻
VDC	VDC	VDC	Ω ± 10%
5	3.75	0.5	55
6	4.5	0.6	68
12	9.0	1.2	270
24	18.0	2.4	1087
48	36.4	4.8	4347
60	48.0	6.0	7500
110	82.5	11.0	27170

外形尺寸图、安装孔 (底视图)、接线图 (底视图)

JQX-115F 外形尺寸图

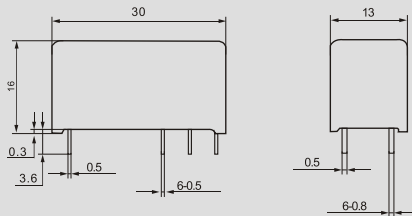

JQX-115F 安装孔 (底视图)

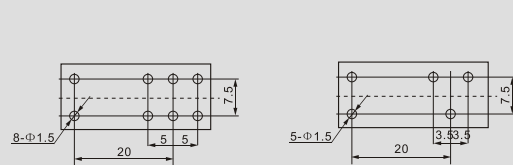

JQX-115F 接线图 (底视图)

