


- 1 Beam / 波纹管传感器

BSH Stainless Steel / 不锈钢



DIMENSIONS / 外形尺寸

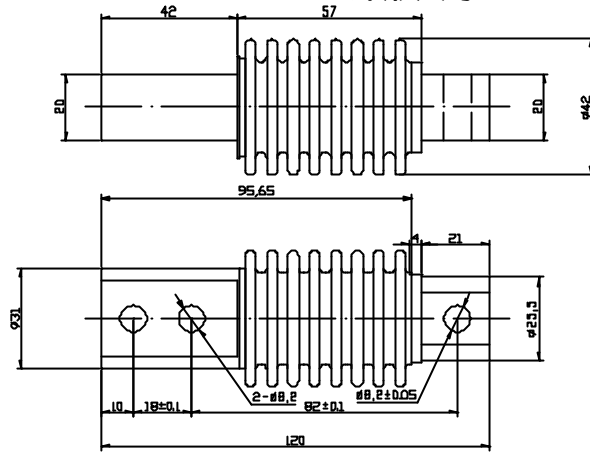

Capacity	A	B	C	D	E	F	G
10—300kg	24.5	53.5	42	50	34	20	8.2
	H	I	J	K	L	M	N
	8.2	27	10	82	18	120	30

CAPACITY / 量程

10kg 20kg 30kg 50kg 100kg 150kg 200kg 250kg

SPECIFICATION / 技术参数

Rated Output/额定输出	2.0mV/V ± 0.1%
Zero Balance/零点平衡	± 0.1% of rated output
Creep after 20 minutes/蠕变	±0.016% of rated output
Nonlinearity/非线性	±0.017% of rated output
Hysteresis/滞后	±0.017% of rated output
Repeatability/重复性	±0.01% of rated output
Temp. effect on output/灵敏度温漂	0.006% of applied output/°C
Temp. effect on zero/零点温漂	0.015% of rated output/°C
Safe Temp. Range 可用温度范围	-20°C to + 50°C
Temp. Compensated/温度补偿范围	-10°C to + 40°C
Safe Overload/安全载荷	150%
Input Impedance/输入阻抗	400 ohm ± 20 ohm
Output Impedance/输出阻抗	350 ohm ± 3 ohm
Insulation Resistance/绝缘阻抗	5000 M ohm
Rated Excitation/推荐激励电压	10V DC/AC
Maximum Excitation/最大激励电压	15V DC/AC
Cable Length/导线长度	3m
Cable Color Code/导线颜色	Red(+E) Black(-E) Green(+S) White(-S)