
F 系列(F-series)







TGG 插头 plug

F系列连接器的主要特点:

- 1、安全的分瓣式推拉自锁系统;
- 2、多芯类型 2-32 芯;
- 3、焊接和印刷线路板针芯;
- 4、高密度安装, 节省空间;
- 5、内部半圆式定位, 防止误插;
- 6、360 度屏蔽提供全方位的EMC 防护。


F series connector with the following main features:

- 1)security of the push-pull self-latching system;
- 2)multi-core type with 2 to 32 pins;
- 3)solder and PCB contacts;
- 4) high-density installation for saving space;
- 5)360-degree screening for full EMC protection;
- 6)inside half-circular position, avoid mismatching.

Parts of connector:

- 1. shell made of copper alloy, stainless steel is used in special occasions, plated with Nickel or Chrome;
- 2. pin and jack made of copper alloy, plated with gold;
- 3. insulator molded with engineering plastic which is high-temperature endurable and good insulating;
- 4. sleeve molded with soft plastic to protect cables.
- 5. waterproof gasket ring is made of high-temperature endurable silicone rubber

产品编号规则 F series part numbering rules:

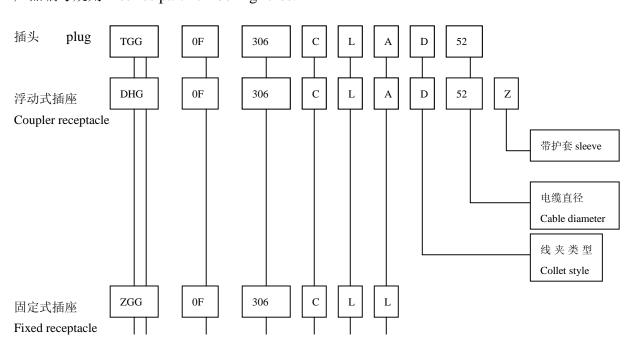

位销 Key fixing

针芯 Contact style

绝缘体 insulator

芯配置 contact

产品编号举例

带线夹的直式插头:

TGG.0F.304.CLAC32 = 直式插头,带线夹, 0F 系列,多芯类型,6芯,黄铜镀铬外壳,PPS 绝缘体,焊接型针芯,适用于外径3.2mm电缆的C 型线夹

固定式插座:

ZGG.0F.304.CLL = 固定式插座,螺母固定, 0F 系列,多芯类型,6芯,黄铜镀铬外壳,PPS 绝缘体,焊接型母针芯

F series part numbering example:

Straight plug with sleeve


TGG.0F.304.CLAC32= 0F series straight plug, multi- contact of 6 pins, chrome plated brass shell, PPS insulator, solder contact, apply to cable diameter of 3.2mm, cable collet fix with black sleeve.

Fixed receptacle

ZGG.0F.304.CLL = 0F Series fixed receptacle, fixed with nut, multi- contact of 6 pins. chrome plated brass shell, PPS insulator, solder contact.

TGG 插头标准型直插头,电缆夹固定电缆,内部零件防止电缆转动,半圆金属防止误插。

Standard straight plug, inside components avoid cable rotating, half-circular matal avoid mismatching.

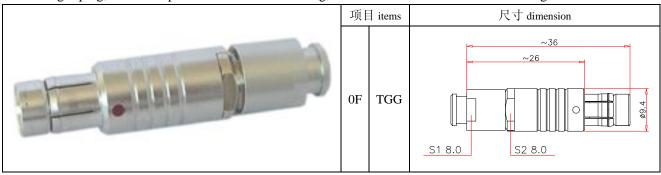

ZGG 插座真空密封型插座,外螺母固定结构,半圆金属防止误插

Vacuum sealed receptacle, outside nut fixed, half-circular matal avoid mismatching.



姓名: 曾红梅 电话: 13712630985 QQ: 1091616784