



24W 投光灯

Model: JTG-24W



特点 Features

- 主要用于建筑立面及绿化树木照明，安装方便快捷。
- 光腔室与电源室用螺旋式散热鳍片连接，达到最优化散热及密封效果。
- 一体化散热结构灯体，比一般结构减小热阻10K/W，内置恒流驱动电源。
- 自带IP68防水接线盒，电源进出线隐藏其中。
- 自带电缆软管接头，避免电缆线直接外露。

Mainly used on facade of a building or afforesting trees, easy to set up. The optical cavity connects with power supply box by spiral heat sink, to get an optimum effect of heat dissipation and encapsulation. Integrated heat dissipation design, reduced the heat resistance by 10K/W compare to others. Built-in constant current power supply. With its own IP68 waterproof junction box, the power wires are concealed in it. With a cable hose connector, can avoid exposure.

技术参数 Specification

- 封装方式：CREE  LUMILEDS 
- 芯片尺寸：45×45mil
- 颜色：红色/绿色/蓝色/白色/暖白色/琥珀色
- 发光效率：40 / 52 / 15 / 95 / 75 / 42 (lm/W)
- 半光衰期：20000小时(实际使用时间向具体厂家查询)
- 功率：24×1W
- 输入电压：AC220V
- 电源效率：90%
- 控制方式：单色并联
- 材质：铝合金表面喷塑
- IP 等级：IP68
- 绝缘类型：CLASS I
- 出线方式：RVV3×0.75 
- 使用环境：-35℃~+40℃

- LED: USA CREE  LUMILEDS 
- Chip Size: 45×45mil
- Color: Red/Green/Blue/White/Warm White/Amber
- Luminous Efficiency: 40 / 52 / 15 / 95 / 75 / 42 (lm/W)
- Luminous Decay at 50%: 20000 hours(for actual lifetime should inquiry the supplier)
- Power: 24 PCS×1W
- Voltage Input: AC220V
- Power Efficiency: 90%
- Control Method: monochrome parallel connection
- Material: aluminum alloy with powder coated finishing
- IP Degree: IP68
- Insulation: CLASS I
- Power Cable: RVV3×0.75 
- Ambient Environment: -35℃~+40℃

产品系列 Product Series

- JTG-24W - 24×1W-220V-

12°	-	红色/Red
16°		绿色/Green
24°		蓝色/Blue
14° × 34°		白色/White
15° × 32°		暖白色/Warm white
45°		琥珀色/Amber
60°		





配光曲线 Distribution Curve

■ 标配透镜 Standard Lens





24x1W Cree Xlamp XP-E-Q5

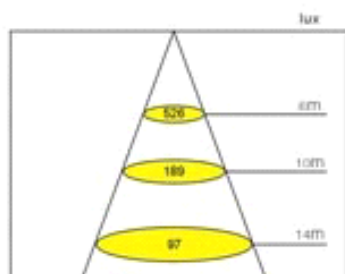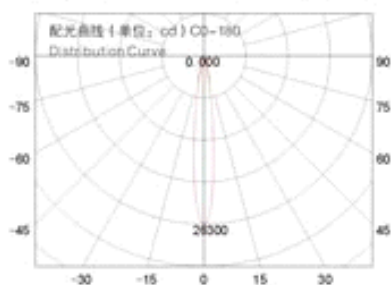



Color	Output (lm)	Power (W)
white	1800	24

24x1W Cree Xlamp XP-E-Q5

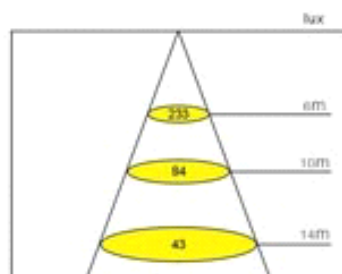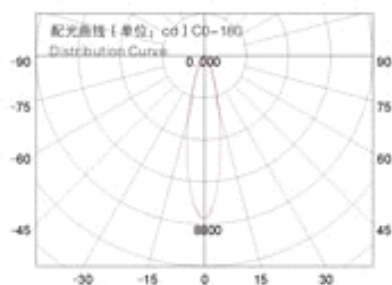


Color	Output (lm)	Power (W)
white	1800	24

24x1W Cree Xlamp XP-E-Q5

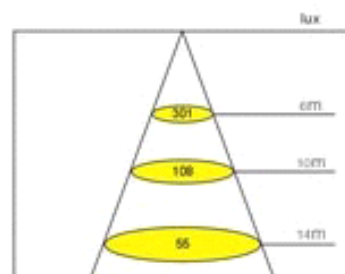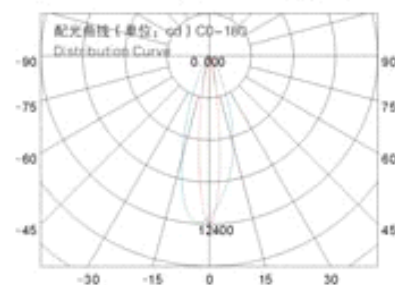


Color	Output (lm)	Power (W)
white	1800	24

■ 可选透镜 Lens Optical



8°



15°



30°






45°



60°



90°

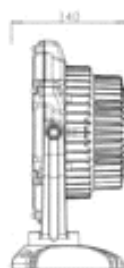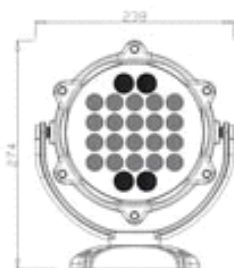


■ 装箱数量: 6PCS/CTN

■ 包装尺寸: 515mm×460mm×305mm

■ 重量: 23Kg

外形及安装尺寸图 Shape and Dimension Drawing

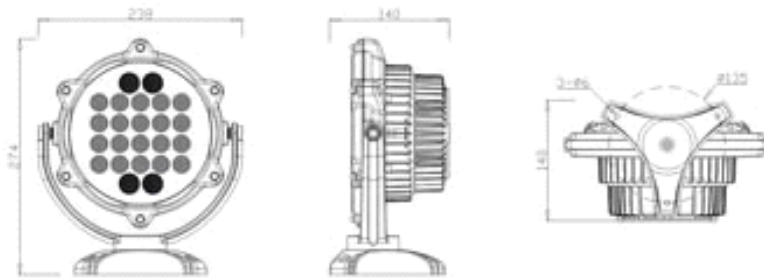

系统接线图 System Diagram



包装尺寸及重量 Package and Weight

■ 装箱数量：6PCS/CTN

■ 包装尺寸：515mm×460mm×305mm

■ 重量：23Kg

■ Packing: 6PCS/CTN

■ Dimension: 515mm×460mm×305mm

■ Weight: 23Kg

中山市劲野照明有限公司

地址：广东省中山市古镇镇海州胜利二路三号楼2层

电话：0760-86907960/1/2 传真：0760-22380042

手机：13480117378（焦先生） 13528182699（夏先生）