

SPEC No.

**MMAQW4P7K-F**

ISSUE 0

**STAMPING**


MMAQW4P7K-F  
4.7MFD ±10%  
250VAC  
CDET

**CONSTRUCTION**

CDE/MMA Series ( SAME AS MMAQW4P7K)

Metallized Polyester ( Non-inductive )  
Flame Retardant UL94V-0 Wrap and Fill

**THIS CAPACITOR IS DESIGNED IN COMPLIANCE WITH THE REQUIREMENTS OF THE EUROPEAN UNION ISSUED DIRECTIVE 2002/95CE FOR THE RESTRICTION OF HAZARDOUS SUBSTANCES (RoHS)**

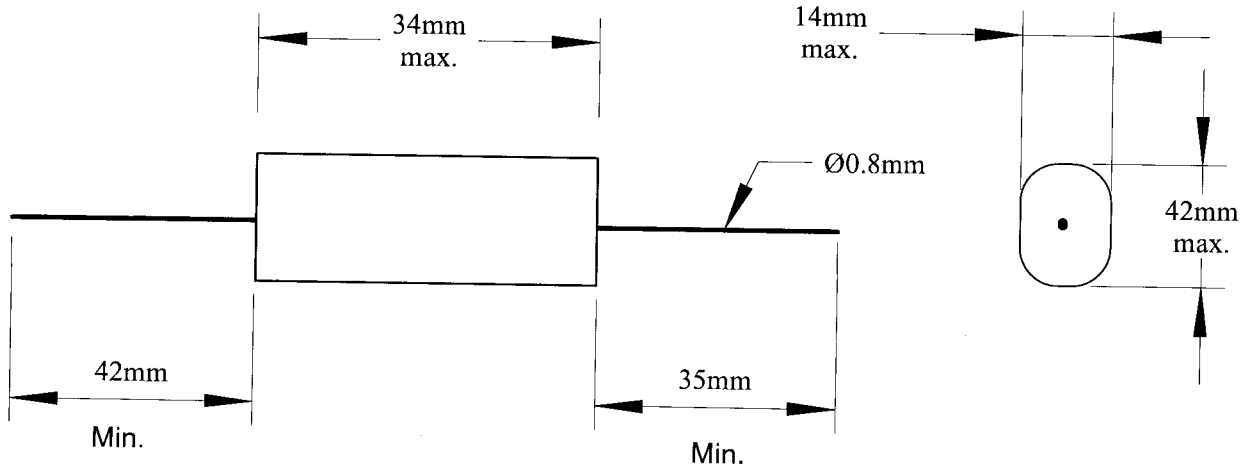

**Electrical Characteristics**

Capacitance/ 4.7µF ±10% @ 25°C 1KHz

Rated Voltage/ 250 Vac

Dissipation Factor/ 0.6% Max. @ 25°C 1KHz

Insulation Resistance/ 10,000Meg-Ohm x µF 30,000 Meg-Ohms Min.

Dielectric Withstand/ 800Vdc for 1 minute.

Operating Temperature/ -55°C to 85°C

**CONFIDENTIAL SPECIFICATIONS**

ENG. Manny Rodrigues	Rev.	Description	Date	By	<p><b>Cornell-Dubilier Electronics 1605 E. Rodney French Blvd. New Bedford, MA.02744</b></p>
APPROVED BY					
DATE 10/20/05					