



双组份自动配比灌胶机 SEC-8600



技术参数：

型号	SEC-8600
操作模式	单动、自动、连动
可操作粘度	<20000CPS
配比精度	±1%




吐出精度	±1%
混合比例	100: 100~100: 10 可调
吐胶速度	1g/sec~15g/sec
操作系统	PLC+触摸屏
计量方式	步进电机+齿轮泵/旋转柱塞泵
操作方式	脚踏开关/启动开关
防固化时间设定	0-100Sec
电源	AC220V 50HZ 2KW
机器尺寸	880(L) ×1180(W)×1600(H)mm
重量	约 130KG
工作环境	湿度：20-90%度， 温度 0-40℃度

主要配置：

名称	单位	数量	备注
料桶搅拌系统	套	1	120W
PLC	套	1	三菱
触摸屏	台	1	威纶
AB 胶混合阀	套	1	根据胶水可选配静态或动态混合阀
高精度计量齿轮泵	套	2	根据胶水可选配旋转柱塞泵
计量马达	套	2	步进马达
储料桶	套	2	30L/15L,可选真空脱泡或加热功能
输胶管	套	2	铁氟龙管
低胶量传感器	套	2	低胶量自动报警
三色指示灯	套	1	工作状态指示
料桶加热器	套	2	日本 PID 温控器(可选项)
胶出口压力检测	套	1	可选
混合管	套	10	动态管或静态管
世椿自动灌胶软件	套	1	世椿自动化自主开发

机器性能：

1. 触摸式中文操作界面，易学易懂；
2. 可储存25组灌胶参数，相同工件灌胶无需重新编程；
3. 吐胶速度、吐胶时间皆可参数设定，出胶量稳定,不漏滴胶；
4. 节省人工，一台设备可达传统5-6个人的产量；
5. 按需配比，实现边混合边灌胶，最大限度节约胶水；
6. 双料桶设计，A胶和B胶分开储料，保证胶水长时间放置不发生固化；
7. 混合比例从100：100到100：10可调，采用动态或静态混合，混合均匀、充分；
8. 独有的控制系统，不受气压因素影响，避免出胶不均、拉丝、气泡等现象；
9. 储料桶配有液位感应开关，缺料自动报警；
10. 可选配胶水搅拌、加热并预留真空脱泡功能，适用于不同种类的灌注工艺。

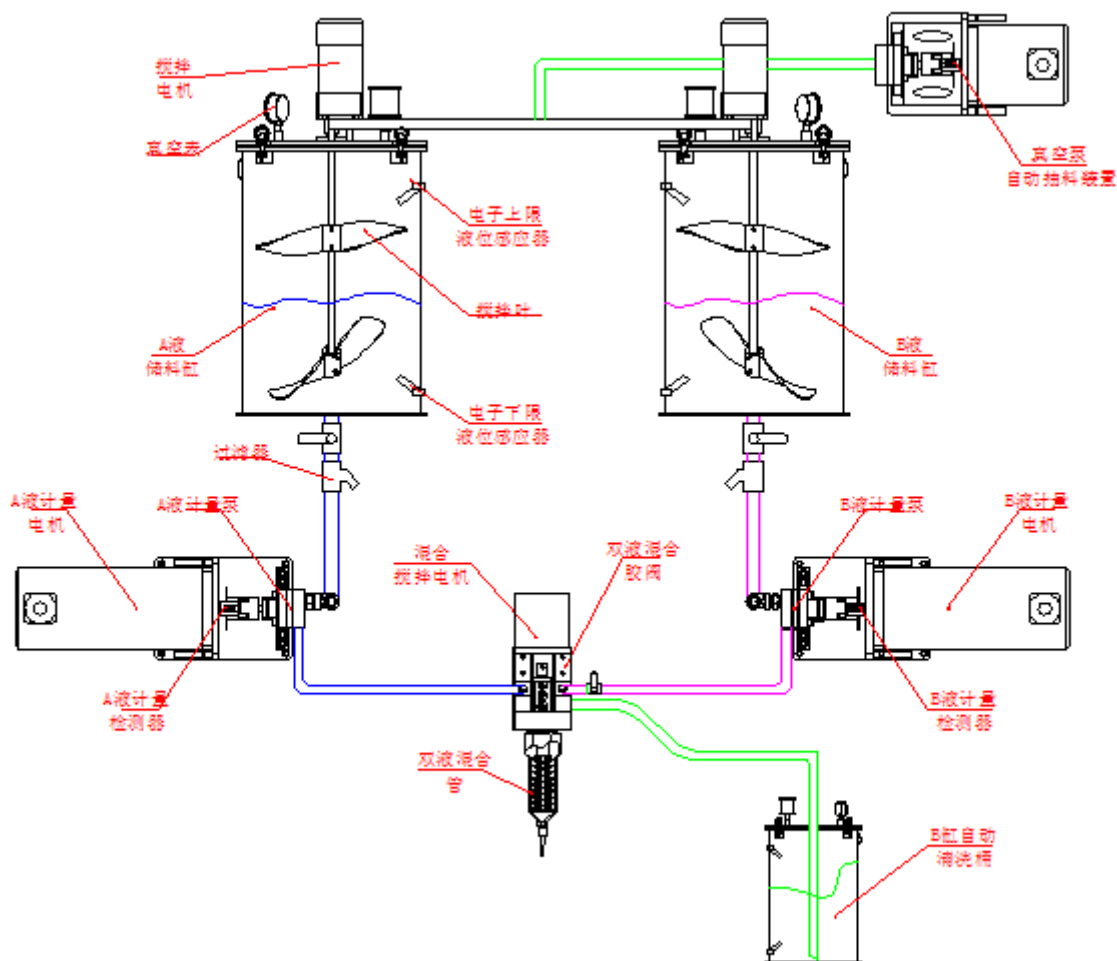

Double-liquid Automatic Mixture Ratio Machine SEC-8600



Specifications:

Model	SEC-8600
Operation mode	Simplification,automatic,continuous
Operation viscosity	<20000CPS
Mixing precision	±1%
Flow resolution	±1%
Mixing ratio	100: 100~100: 10
Velocity of flow	1g/sec~15g/sec
Operation system	PLC+touch screen
Measuring mode	Stepping Motor/gear pump/rotary-plunger pump
Operation mode	Foot switch/auto switch
Preventing time of curing	0-100Sec
Power	AC220V 50HZ 2KW
Size	880(L)×1180(W)×1600(H)mm
Weight	About 130KG
Work Condition	Moisture: 20-90%, Temperature:0-40℃

Configurations:

Title	Unit	QTY	Remarks
Material mixing system	kit	1	120W
PLC	kit	1	Mitsubishi
Touch screen	set	1	Easyview
AB mixing valve	kit	1	Dynamic or static state
Hight precision gear pump	kit	2	Rotary-plunger pump
Computation motor	kit	2	Stepping motor
Barrel	kit	2	30L/15L,
Flow tube	kit	2	Teflon hose
Low amount sensor	kit	2	Alam when low amount
Tricolor indicator lamp	kit	1	Working state indication
Material heater	kit	2	PID Heater from Japan



Discharging pressure detector	kit	1	Optional
Mixing tube	kit	10	Dynamic or sttic state
Second automatic dispenser software	kit	1	Second Automatic

Features:

1. Touch plane in Chinese for easy operating
2. Can store 25 program:
3. Dispensing speed and time can be adjusted with software to ensure the dispensing stably:
4. Save manpower, one machine correspond to 5-6 manpower:
5. According to needs for mixing can save the glue:
6. Store A and B barrel individual to ensure the glue can't be cured in a long time ;
7. Dynamic or static mixing mode can make the mixing fully, Mixing ration can fixed in a range 100:100 to 100:10
8. Especial control system, avoid the phenomenon of drawing and bubble
9. Have sensor switch of the barrel can alarm in starving
10. Optional Heating and deaeration function can be applicable to various dispensing process.