


RECOMMENDED P.C.B LAYOUT  
TOLERANCE ±0.05MM


NOTES:

- 1.MATERIAL:  
HOUSING:HI-TEMP. PLASTIC,BLACK,U.L 94V-0  
CONTACT:COPPER ALLOY,T=0.15mm.  
SHELL:STAINLESS STEEL,T=0.15mm.
  - 2.FINISH:  
CONTACT:50u" MIN NI UNDERPLATING OVERALL.  
GOLD PLATING ON ALL SURFACE.  
SHELL:50u" MIN NI UNDERPLATING OVERALL,  
60u" MIN Tm PLATING ON ALL SURFACE.
  - 3.ALL DIMENSIONS MARKED  $\nabla$  MUST BE CONTROLLED BY QC.
  - 4.PART NO.:  
HYAS0600\*01
- HEIGHT:
- |    |       |
|----|-------|
| 31 | H=3.1 |
| 29 | H=2.9 |
| 27 | H=2.7 |
| 25 | H=2.5 |
| 21 | H=2.1 |

HYAS06003101	3.10	2.00	H=3.1
HYAS06002901	2.90	1.80	H=2.9
HYAS06002701	2.70	1.60	H=2.7
HYAS06002501	2.50	1.40	H=2.5
HYAS06002101	2.10	1.00	H=2.1

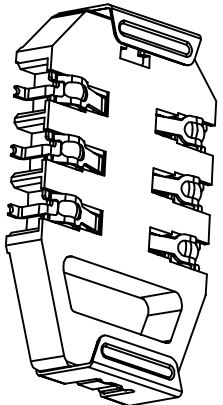

DIM	TOL.	DIM	TOL.
X	±0.30	X*	±2*
X	±0.25	X*	±1*
XX	±0.20	XX*	±0.5*
XXX	±0.15		

 **深圳市宏艺康精密零组件有限公司**

PART NO: **HYAS0600\*01**

TITLE: **CUSTOMER DWG.**

APPD: **彭玉成 彭玉成**

CHKD:

DR:

DWG NO:

UNITS SCALE SHEET REV.

mm N/A 1/1 AO

REV.	DESCRIPTION	DESIGN
AO	Initial Release	