
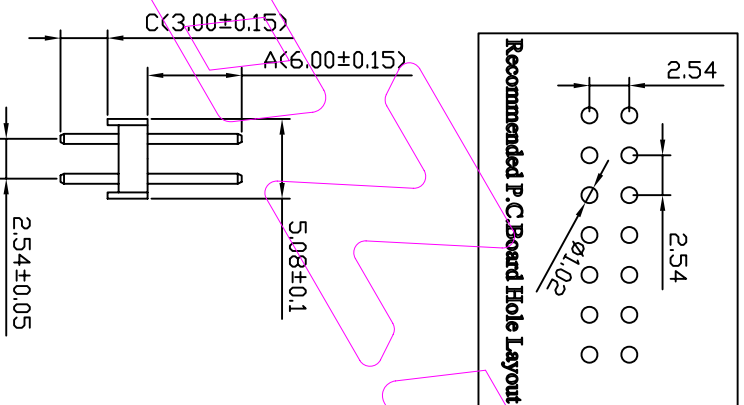
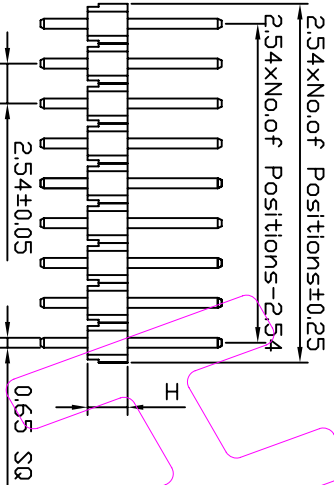


APPLICATION AND FEATURES

1. Side end stackable (on unbroken edges).
2. Notches for easy breakable.
3. Maintains the dimension between two P.C Board.
4. Variable pin length, gold or tin plated.
5. Standoffs facilitate plastic soldering clean.

SPECIFICATIONS

- Current Rating: 3A
- Insulator resistance: 5000M Min
- Dielectric withstanding: AC 500V
- Operating Temperature: $-40^{\circ}\text{C} \sim +105^{\circ}\text{C}$
- Contact Material: Brass or Phosphor bronze
- Insulator Material: Polyester, UL94V-0
- Standard: P.B.T
- Finish: Tin, gold Duplex plated
- Note: Duplex plating: gold plated on contact area, Tin on solder area



Units	mm	Scale	3:1
Tolerance Unless Otherwise Specified			
.X ~ ±0.30			
.XX ~ ±0.25			
.XXX ~ ±0.20			
Angle ~ ±3°			
		Date	2007/06/18
		Sheet	1 of 1
深圳市华忠益科技有限公司 TEL: +86 (755) 27190139 FAX: 27190139		Title	
		2.54mm双排单塑排针180度	
Drawing By		Date	
Mr Lee			
RELEASED	06/18/07	REV	A