


DIP SWITCH DATA SHEET

DSIC Series *1C Type DIP SW*

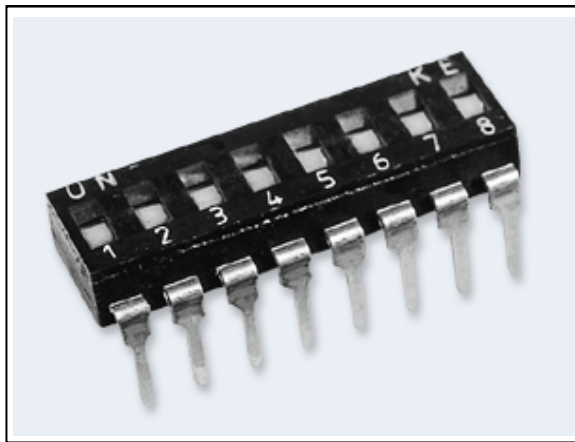



YIKAI ELECTRONIC CO., LTD.

TEL:+86-755-28102590/27745920 FAX:+86-755-28102513/82863454

Http://www.bjyikai.com /www.szyikai.cn Email: szyikai@126.com

DSIC Series




IC Type DIP SW



Features


- All materials are UL 94V-0 grade, high temperature resistance plastic.
- Twin contact design to ensure stable contact.
- Gold-plated contact to ensure low contact resistance, Tin plated terminals to prevent contamination during soldering.

Dimensions (unit: mm)

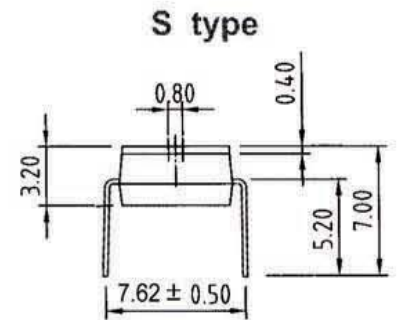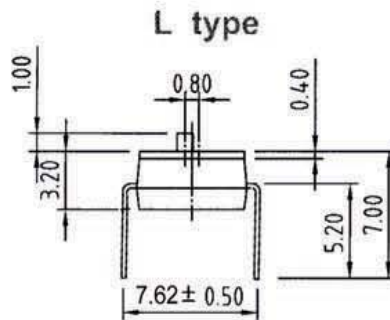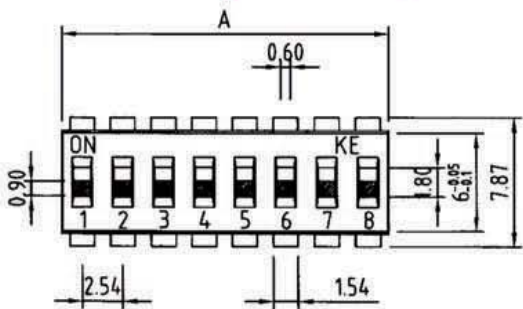


No. of Positions		2	3	4	5	6	7	8	9	10	12
A	mm	5.08	7.62	10.16	12.7	15.24	17.78	20.32	22.86	25.4	30.48
	inch	0.2	0.3	0.4	0.5	0.6	0.7	0.8	0.9	1.0	1.2

P.C.B. Layout (unit: mm)

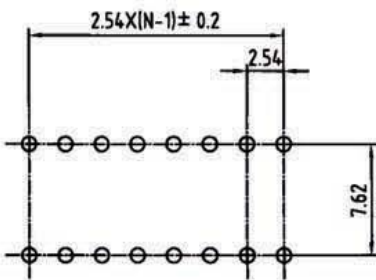

Circuitry



Material

Part Name	Material	Finished
Base	PPS UL94 V0	Black
Cover	PPS UL94 V0	Black
Actuator	Nylon UL94 V0	White
Movable	Copper Alloy	Gold/Tin
Terminal Contact	Brass	Gold/Tin
Terminal	Brass	Gold/Tin

Ratings:

Contact Rating

- Switching : 25mA at 24VDC
 Non-Switching : 100mA at 50VDC

Contact Resistance

- Initial : 50mΩ Max
 After life : 100mΩ Max
 Insulation Resistance : 100mΩ Max, Min at 100VDC
 Dielectric Strength : 500VAC for 60 seconds
 Switch Capacitance : 5pF Max at 1MHZ
 Operation Temperature : -30°C to +85°C
 Storage Temperature : -40°C to +85°C

Mechanical & Processing

- Operation Force : 1000gf Max
 Mechanical Life : 3000 cycles operations
 Resistance to Soldering : 250°C±10°C for 10 seconds

DSIC / DSPV Series

Environmental

Gold Testing

Switches under temperature at $-40^{\circ}\text{C}\pm 2^{\circ}\text{C}$ for 96 hours

Dry Heat Testing

Switches under temperature at $85^{\circ}\text{C}\pm 2^{\circ}\text{C}$ for 96 hours

Humidity

Per MIL-STD-202F, Method 103B, Test Condition B:

There shall be no evidence of corrosion and the insulation resistance shall be no less than 100 megaohms.

Vibration:

Per MIL-STD-202F, Method 204D, Test Condition A:

There shall be no opening of closed contacts or closing of open contacts in excess of 10 microseconds.

Shock:

Per MIL-STD-202F, Method 213B, Test Condition A:

There shall be no opening of closed contacts or closing of open contacts in excess of 10 microseconds.

Thermal Shock:

Per MIL-STD-202F, Method 107G, Test Condition A:


There shall be no evidence of physical damage or permanent change in electrical characteristics.

Salt-Spray Test

Per MIL-STD-202F, Method 101D, Test Condition B:


There are under $35\pm 2^{\circ}\text{C}$ in temperature and $5\pm 1\%$ salt-water concentration for 48 ± 1 hours.

Packing Specifications

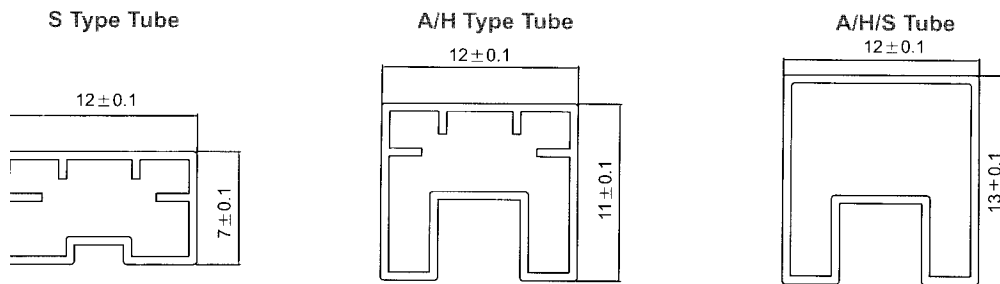

Unit: Piece/per Tube

Package	Pole	2	3	4	5	6	7	8	9	10	12
Tube	Q'TY	100	66	50	40	33	28	25	22	20	16
Tube	Q'TY	83	58	42	35	30	26	23	20	18	15

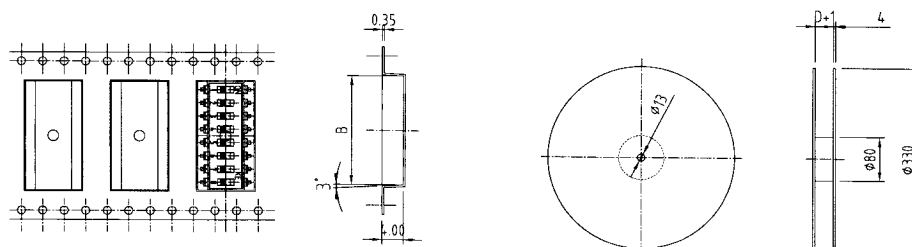

Unit: Piece/per Reel

Package	Pole	2	3	4	5	6	7	8	9	10	12
Reel	Q'TY	1,000	1,000	1,000	1,000	1,000	1,000	1,000	1,000	1,000	1,000

DSIC series DIP Switch

STANDARD SPECIFICATION

1.Ratings:

- 1.1 **Mechanical Life** : 3000 cycles minimum
- 1.2 **Contact Rating**: 100mA at 50 Vdc non-switching; 25 mA at 24 Vdc, 10 mA at 50 Vdc Switching.
- 1.3 **Contact Resistance**:
 - 50 milliOhms maximum (initial)
 - 100 milliOhms maximum (after test)
- 1.4 **Insulation Resistance**: 1,000MOhm Minimum at 500 Vdc between adjacent closed contacts and Also across open switch contacts.
- 1.5 **Dielectric Strength**: 500 Vac, RMS, minimum voltage measured between adjacent closed contacts and also across open switch contacts.
- 1.6 **Switch Capacitance**: 5pF at 1 MHz
- 1.7 **Operating Temperature**: -30deg C to +85deg C.
- 1.8 **Storage Temperature**: -40deg C to +85deg C.
- 1.9 **Test condition** : The standard test shall be 5 ~ 35deg C temperature and 45 ~ 85% relative humidity 860 ~ 1060 Hpa atmospheric pressure unless otherwise specified. In case of any question happen, retest condition shall specify by temperature 20 +/- 2deg C, 65 +/-5%RH and 860 ~ 1060 Hpa.

2.Materials and Finishes:

- 2.1 Finished code :
 - G**: Full Gold Plated (Contact area & Terminal with gold-plated)
 - S**: Contact – Gold plated with Terminal Tin-plated
- 2.2 Plated code :
 - E**: 3 u" Gold -Plated
 - F**: 10u" Gold -Plated
 - A**: 12u" Gold -Plated
 - B**: 20u" Gold -Plated
 - G**: 30u" Gold -Plated
- 2.3 **Base** : UL 94 V0 grade PPS Thermoplastic / Black color
- 2.4 **Cover** : UL 94 V0 grade PPS Thermoplastic / Black color
- 2.5 **Actuator** : UL 94 V0 grade NYLON Thermoplastic / Whit color

3.Processing:

- 3.1 **Switch Operation and Taping**
 - 3.1.1 Use tweezers or ball point pen for operation.
 - 3.1.2 Flux cleaning should be done without removing the tape
 - 3.1.3 If the tape is removed, it adhered less than before when it is placed back on, possibly causing flux inflow.
 - 3.1.4 Sealed switches withstand aqueous, detergent and isopropyl alcohol washing.

DSIC series DIP Switch

STANDARD SPECIFICATION

4. ELECTRICAL CHARACTERISTIC :

ITEM	TEST DESCRIPTION	TEST CONDITIONS	SPECIFICATION
4.1	Contact Resistance	To be measure with AC 1 KHz +/-200Hz (Max 20mV, Max 50mA) or 10mA, 5V DC.	Max 50 mOhm
4.2	Insulation Resistance	To be measured with an insulation measuring device of 500V DC between all the terminals and between the terminals and the frame for 1 minute +/-5 seconds.	Min 1,000MOhm
4.3	Dielectric Breakdown Voltage	AC 500V (50-60Hz, 2mA current) being applied between all the adjacent terminals and between the terminal and frame for 1 minute.	No breakdown insulation
4.4	Switch Capacitance	To be measured with frequency 1MHz +/-10KHz Applied between adjacent terminal and circuit.	Max 5PF

5. MECHANICAL CHARACTERISTIC :

ITEM	TEST DESCRIPTION	TEST CONDITIONS	SPECIFICATION
5.1	Operation Force	Applied in the direction of operation.	1,000gf Max
5.2	Terminal Strength MIL-STD-202F Method : 211A Condition : C	Measurement in made with a static load applied to the foot of the control unit in the operating direction. A static force of 500gf being applied in one direction on the tip of the terminal for 5~10seconds. One time each terminal.	No bending or deflection experienced. The terminal may be bent, but shall not break or damage the insulation material.
5.3	Operation Strength	A load of 1Kgf is applied in the operating direction and pulling direction of the control unit for 15 seconds.	Electrical characteristic of the above shall be assured.

DSIC series DIP Switch


STANDARD SPECIFICATION

6. RELIABILITY

6.1	Cold Resistance JIS-C5021	Switch for testing being kept in the conditions at -40 +/-2deg C in temperature for 96 hours, and in a normal ambient condition for one hour, then to be measured within one hour. (Drops of water being taken away)	Contact resistance Max 100mOhm Insulation resistance Min 1,000 MOhm Dielectric breakdown voltage: AC 500V 1 minute no breakdown insulation
6.2	Dry Heat Resistance JIS-C5022	Switch for testing being kept in the conditions at 55+/-2deg C in temperature for 96 hours, and in a normal ambient condition for one hour, then to be measured within one hour.	Operating force 1,000gf Max. There shall be no defects in appearance or in the mechanical functions.
6.3	Humidity Resistance MIL-STD-202F Method : 103B Condition : C	Switch for testing being kept in the conditions at 40+/-2deg C in temperature and 90~95% RH for 96 hours, and in a normal ambient condition for one hour, then measured within one hour.	Contact resistance Max 100mOhm Insulation resistance Min 10MOhm Dielectric breakdown voltage: AC 500V 1 minute no breakdown insulation Operating force 800gf Max.
6.4	Vibration Test MIL-STD-202F Method : 201A Condition : A	The range of vibration: 10 ~ 55Hz Total width of vibration: 1.5mm The proportion of vibration: 10~55~10(Hz) approx. 1 minute The variation of the number of vibration: Logarithmic or approx. straight line The directions: 3 vertical directions including operation direction Amplitude : 0.03inch~0.06inch Duration: 2 hours each (Total 6 hours)	There should be no defects in appearance or in the mechanical functions.

DSIC series DIP Switch

STANDARD SPECIFICATION
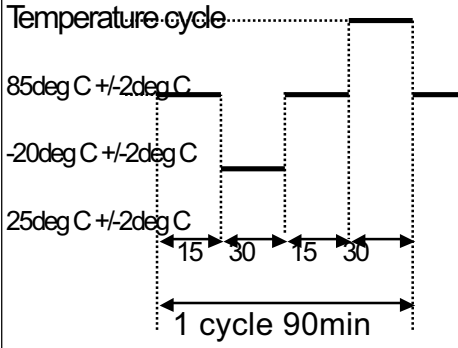
<p>6.5</p>	<p>Shock Test</p> <p>MIL-STD-202F Method : 213B Condition : A</p>		<p>Contact resistance Max 100mOhm Insulation resistance Min 1,000 MOhm Dielectric breakdown voltage: AC 500V 1 minute no breakdown insulation Operating force 1,000gf Max. There shall be no defects in appearance or in the mechanical functions.</p>
<p>6.6</p>	<p>Thermal Shock</p>	<p>After 5 cycle testing under the following conditions, the sample is allowed to stand under normal temperature and humidity conditions for 1 hour, and measurement is made within 1 hour after that. Water drops should be eliminated.</p> <p>Temperature cycle</p>  <p>85deg C +/-2deg C -20deg C +/-2deg C 25deg C +/-2deg C</p> <p>15 30 15 30</p> <p>1 cycle 90min</p>	<p>Contact resistance Max 100 mOhm Insulation resistance Min 1,000 MOhm Dielectric breakdown voltage: AC 500 V 1 minute no breakdown insulation Operating force 1,000gf Max.</p> <p>There shall be no defects in appearance or in the mechanical functions</p>


DSIC series DIP Switch

STANDARD SPECIFICATION

ITEM	TEST DESCRIPTION	TEST CONDITIONS	SPECIFICATION
6.7	Resistance to Soldering Heat JIS-C5034	Reflow Soldering P.C. board terminal at 250 +/-10deg C, 10 +/-1 second Should be operated in OFF positions when soldering Wave Soldering : Soldering temperature: 230 +/-5deg C Immersing time: 3+/-0.5 second Iron Tip : 30W Iron / ceramic Tip Temp. : 320+/-5deg C / 3 sec per pin	Contact resistance Max 50mOhm Insulation resistance Min 1,000MOhm Dielectric breakdown voltage AC500V 1 minute no breakdown insulation Operating force 1,000gf Max

(1) Reflow soldering:

Device :In-line or Batch system
 Apply reflow soldering only once

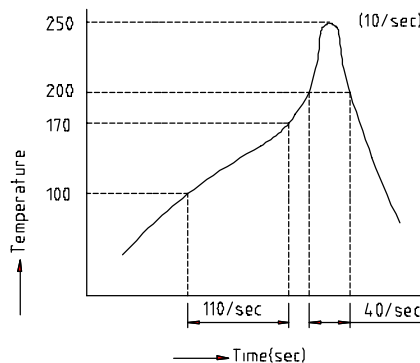

(2) When soldering two or more terminals to the common land, use solder resist to solder them independently.

6.8	Salt-Spray Test MIL-STD-202F Method : 101D Condition : B	The sample is allowed to stand in the test chamber controlled to 35+/-2deg C in temperature and 5+/-1% (weight ratio) salt-water concentration for 48+/-1hour and is subjected to test. Then, salt deposits attached to the sample are washed away with water.	Shall be free from functionally harmful rust. There shall be no defects in appearance or in the mechanical functions.
-----	---	--	--

DSIC series DIP Switch
STANDARD SPECIFICATION

7. DURABILITY

ITEM	TEST DESCRIPTION	TEST CONDITIONS	SPECIFICATION
7.1	Operation Life With No Load	3,000 cycle operation at a rate of 15 ~20 cycle / minute	Contact resistance Max 100 mOhm Insulation resistance Min 1,000 MOhm with DC 250V Dielectric breakdown voltage: AC 250 V 1 minute no breakdown insulation
7.2	Operation Life With Load	DC 2AV 25mA 2,000 cycle operation at a rate of 15 ~ 20 cycle / minute	Operating force : 1,000gf Max. There shall be no defects in appearance or in the mechanical functions.