

双速按键

同一方向按压，两段式导通功能。方型外观设计，同时有单次导通功能开关可选。符合ROHS、PB FREE
适用于工业设备控制



SPECIFICATIONS

RATING: 30mA /28VDC.

OPERATING SPEED: 100mm/sec.



ELECTRIC LIFE: 20,000 cycles.

FORCE1: 5~7N ; FORCE2: 11~14N.

OPERATING POSITION1: 9.7 ± 0.2mm OPERATING POSITION2: 8.9 ± 0.2mm

FULL TRAVERLS: 2.0mm

尺寸大小



Part No. Shown : PS3002


NOTE

Force 1: G5~7N




Force 2: G11~14N

Operating position 1: 9.7 ± 0.2mm

Operating position 2: 8.9 ± 0.2mm

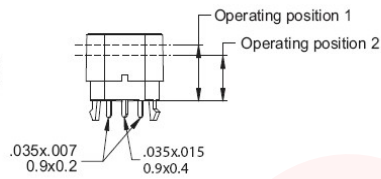

P.C. MOUNTING




Part No. Shown : PS3001


NOTE

Force: G3.4~6.4N

Operating position: 8.9 ± 0.2mm



P.C. MOUNTING



若需咨询产品详情，请联系我们由销售工程师为您服务。