确认此型号所有图纸 签字确认：

GENERAL TOLERANCE:±0.2

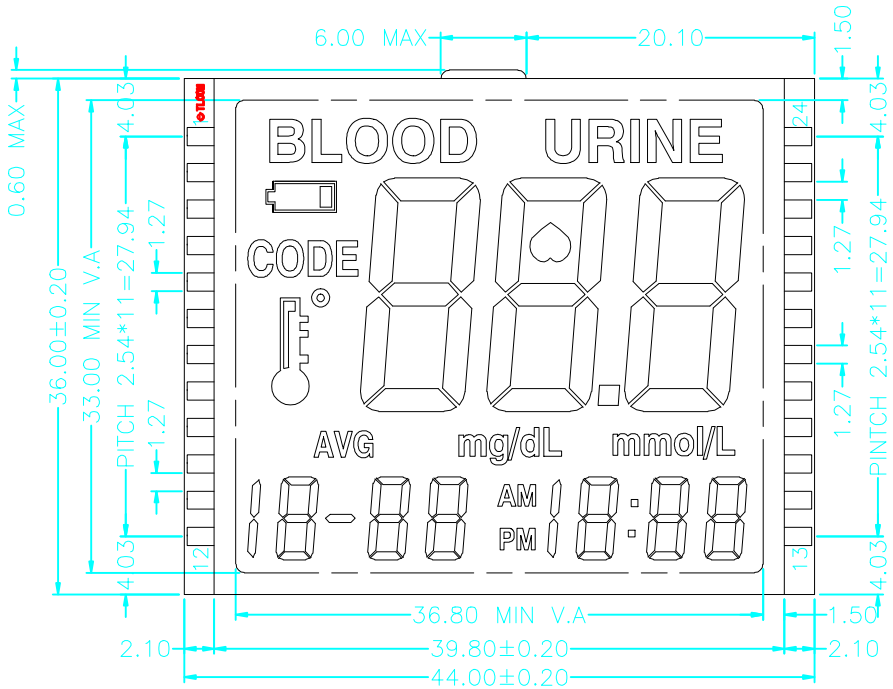

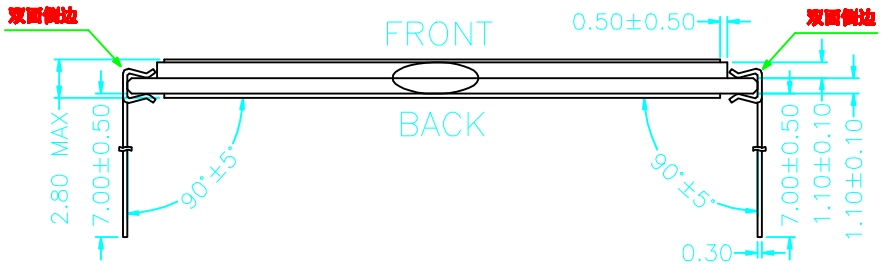

SPECIFICATIONS

FRONT POLARIZER :	TRANSMISSIVE
BACK POLARIZER :	REFLECTIVE
STORAGE TEMP :	−30°C TO +80°C
OPERATING TEMP :	−20°C TO +70°C
VIEWING DIRECTION :	6 O'CLOCK
DRIVE CONDITION :	1/4D 1/3B, 3.0V
DISPLAY MODE :	HTN, POSITIVE MODE
CONNECTOR:	PIN
CUSTOMER P/N :	W509110H

SHEET: 1 OF 3		樹本國際股份有限公司 SOOBOO INTERNATIONAL CO.,LTD		
GENERAL TOL: ±0.20 MM	UNITS MM			
CUS NO:		MODULE NUMBER: GH10190−RP0		TEL:0755−33503277
DRAW BY:	ZXM			FAX:0755−22145294
CHK BY:	LIQIN			
APP BY:	88	DO NOT SCALE THIS DRAWING.	PROJECTION	DATE: 7−NOV−2011